

CDO User's Guide

Climate Data Operators
Version 1.5.0
March 2011

Uwe Schulzweida, Luis Kornblueh – *MPI for Meteorology*
Ralf Quast – *Brockmann Consult*

Contents

1. Introduction	6
1.1. Building from sources	6
1.1.1. Compilation	7
1.1.2. Installation	7
1.2. Usage	8
1.2.1. Options	8
1.2.2. Operators	8
1.2.3. Combining operators	9
1.2.4. Operator parameter	9
1.3. Grid description	10
1.3.1. Predefined grids	10
1.3.2. Grids from data files	10
1.3.3. SCRIP grids	11
1.3.4. PINGO grids	11
1.3.5. CDO grids	11
1.4. Z-axis description	13
1.5. Time axis	14
1.5.1. Absolute time	14
1.5.2. Relative time	14
1.5.3. Conversion of the time	14
1.6. Parameter table	14
1.7. Missing values	14
1.7.1. Mean and average	15
2. Reference manual	16
2.1. Information	17
2.1.1. INFO - Information and simple statistics	18
2.1.2. SINFO - Short information	19
2.1.3. DIFF - Compare two datasets field by field	20
2.1.4. NINFO - Print the number of parameters, levels or times	21
2.1.5. SHOWINFO - Show variables, levels or times	22
2.1.6. FILEDES - Dataset description	23
2.2. File operations	24
2.2.1. COPY - Copy datasets	25
2.2.2. REPLACE - Replace variables	26
2.2.3. MERGE - Merge datasets	27
2.2.4. SPLIT - Split a dataset	28
2.2.5. SPLITTIME - Split time steps of a dataset	29
2.2.6. SPLITSEL - Split selected time steps	30
2.3. Selection	31
2.3.1. SELVAR - Select fields	32
2.3.2. SELTIME - Select time steps	35
2.3.3. SELBOX - Select a box of a field	37
2.4. Conditional selection	38
2.4.1. COND - Conditional select one field	39
2.4.2. COND2 - Conditional select two fields	39
2.4.3. CONDC - Conditional select a constant	40
2.5. Comparison	41
2.5.1. COMP - Comparison of two fields	42

2.5.2.	COMPC - Comparison of a field with a constant	43
2.6.	Modification	44
2.6.1.	SET - Set field info	45
2.6.2.	SETTIME - Set time	46
2.6.3.	CHANGE - Change field header	48
2.6.4.	SETGRID - Set grid type	49
2.6.5.	SETZAXIS - Set z-axis type	49
2.6.6.	SETGATT - Set global attribute	50
2.6.7.	INVERT - Invert latitudes	51
2.6.8.	INVERTLEV - Invert levels	51
2.6.9.	MASKREGION - Mask regions	52
2.6.10.	MASKBOX - Mask a box	53
2.6.11.	SETBOX - Set a box to constant	54
2.6.12.	ENLARGE - Enlarge fields	55
2.6.13.	SETMISS - Set missing value	56
2.7.	Arithmetic	58
2.7.1.	EXPR - Evaluate expressions	59
2.7.2.	MATH - Mathematical functions	61
2.7.3.	ARITHC - Arithmetic with a constant	62
2.7.4.	ARITH - Arithmetic on two datasets	63
2.7.5.	MONARITH - Monthly arithmetic	64
2.7.6.	YMONARITH - Multi-year monthly arithmetic	65
2.7.7.	YDAYARITH - Multi-year daily arithmetic	66
2.7.8.	ARITHDAYS - Arithmetic with days	67
2.8.	Statistical values	68
2.8.1.	CONSECSTAT - Consecutive timestep periods	73
2.8.2.	ENSSTAT - Statistical values over an ensemble	74
2.8.3.	ENSSTAT2 - Statistical values over an ensemble	76
2.8.4.	FLDSTAT - Statistical values over a field	78
2.8.5.	ZONSTAT - Zonal statistical values	80
2.8.6.	MERSTAT - Meridional statistical values	82
2.8.7.	GRIDBOXSTAT - Statistical values over grid boxes	84
2.8.8.	VERTSTAT - Vertical statistical values	85
2.8.9.	TIMSELSTAT - Time range statistical values	86
2.8.10.	TIMSELPCTL - Time range percentile values	87
2.8.11.	RUNSTAT - Running statistical values	88
2.8.12.	RUNPCTL - Running percentile values	89
2.8.13.	TIMSTAT - Statistical values over all time steps	90
2.8.14.	TIMPCTL - Percentile values over all time steps	91
2.8.15.	HOURLSTAT - Hourly statistical values	92
2.8.16.	HOURLPCTL - Hourly percentile values	93
2.8.17.	DAYSTAT - Daily statistical values	94
2.8.18.	DAYPCTL - Daily percentile values	95
2.8.19.	MONSTAT - Monthly statistical values	96
2.8.20.	MONPCTL - Monthly percentile values	97
2.8.21.	YEARSTAT - Yearly statistical values	98
2.8.22.	YEARPCTL - Yearly percentile values	99
2.8.23.	SEASSTAT - Seasonal statistical values	100
2.8.24.	SEASPCTL - Seasonal percentile values	101
2.8.25.	YHOURLSTAT - Multi-year hourly statistical values	102
2.8.26.	YDAYSTAT - Multi-year daily statistical values	103
2.8.27.	YDAYPCTL - Multi-year daily percentile values	104
2.8.28.	YMONSTAT - Multi-year monthly statistical values	105
2.8.29.	YMONPCTL - Multi-year monthly percentile values	106
2.8.30.	YSEASSTAT - Multi-year seasonal statistical values	107
2.8.31.	YSEASPCTL - Multi-year seasonal percentile values	108
2.8.32.	YDRUNSTAT - Multi-year daily running statistical values	109
2.8.33.	YDRUNPCTL - Multi-year daily running percentile values	111

2.9. Correlation	112
2.9.1. FLDCOR - Correlation of grid space	113
2.9.2. TIMCOR - Correlation over time	113
2.10. Regression	114
2.10.1. REGRES - Regression	115
2.10.2. DETREND - Detrend time series	115
2.10.3. TREND - Trend of time series	116
2.10.4. SUBTREND - Subtract a trend	116
2.11. EOFs	117
2.11.1. EOFS - Empirical Orthogonal Functions	118
2.11.2. EOFCOEFF - Principal coefficients of EOFs	120
2.12. Interpolation	121
2.12.1. REMAPGRID - SCRIP grid interpolation	122
2.12.2. GENWEIGHTS - Generate SCRIP grid interpolation weights	124
2.12.3. REMAP - SCRIP grid remapping	126
2.12.4. REMAPETA - Remap vertical hybrid level	127
2.12.5. INTVERT - Vertical interpolation	129
2.12.6. INTLEVEL - Linear level interpolation	130
2.12.7. INTTIME - Time interpolation	131
2.12.8. INTYEAR - Year interpolation	132
2.13. Transformation	133
2.13.1. SPECTRAL - Spectral transformation	134
2.13.2. WIND - Wind transformation	136
2.14. Import/Export	137
2.14.1. IMPORTBINARY - Import binary data sets	138
2.14.2. IMPORTCMSAF - Import CM-SAF HDF5 files	139
2.14.3. IMPORTAMSR - Import AMSR binary files	140
2.14.4. INPUT - Formatted input	141
2.14.5. OUTPUT - Formatted output	142
2.15. Miscellaneous	144
2.15.1. GRADSDES - GrADS data descriptor file	145
2.15.2. FILTER - Time series filtering	146
2.15.3. GRIDCELL - Grid cell quantities	147
2.15.4. SMOOTH9 - 9 point smoothing	148
2.15.5. REPLACEVALUES - Replace variable values	148
2.15.6. TIMSORT - Timsort	149
2.15.7. VARGEN - Generate a field	149
2.15.8. ROTUV - Rotation	150
2.15.9. MASTRFU - Mass stream function	150
2.15.10. HISTOGRAM - Histogram	151
2.15.11. SETHALO - Set the left and right bounds of a field	151
2.15.12. WCT - Windchill temperature	152
2.15.13. FDNS - Frost days where no snow index per time period	152
2.15.14. STRWIN - Strong wind days index per time period	152
2.15.15. STRBRE - Strong breeze days index per time period	153
2.15.16. STRGAL - Strong gale days index per time period	153
2.15.17. HURR - Hurricane days index per time period	153
2.16. Climate indices	154
2.16.1. ECACDD - Consecutive dry days index per time period	156
2.16.2. ECACFD - Consecutive frost days index per time period	156
2.16.3. ECACSU - Consecutive summer days index per time period	157
2.16.4. ECACWD - Consecutive wet days index per time period	157
2.16.5. ECACWDI - Cold wave duration index wrt mean of reference period	158
2.16.6. ECACWFI - Cold-spell days index wrt 10th percentile of reference period	158
2.16.7. ECAETR - Intra-period extreme temperature range	160
2.16.8. ECAFD - Frost days index per time period	160
2.16.9. ECAGSL - Thermal Growing season length index	161
2.16.10. ECAHD - Heating degree days per time period	162

2.16.11.ECAHWDI - Heat wave duration index wrt mean of reference period	162
2.16.12.ECAHWFI - Warm spell days index wrt 90th percentile of reference period	163
2.16.13.ECAID - Ice days index per time period	163
2.16.14.ECAPD - Precipitation days index per time period	164
2.16.15.ECAR75P - Moderate wet days wrt 75th percentile of reference period	165
2.16.16.ECAR75PTOT - Precipitation percent due to R75p days	165
2.16.17.ECAR90P - Wet days wrt 90th percentile of reference period	166
2.16.18.ECAR90PTOT - Precipitation percent due to R90p days	166
2.16.19.ECAR95P - Very wet days wrt 95th percentile of reference period	167
2.16.20.ECAR95PTOT - Precipitation percent due to R95p days	167
2.16.21.ECAR99P - Extremely wet days wrt 99th percentile of reference period	168
2.16.22.ECAR99PTOT - Precipitation percent due to R99p days	168
2.16.23.ECARR1 - Wet days index per time period	169
2.16.24.ECARX1DAY - Highest one day precipitation amount per time period	169
2.16.25.ECARX5DAY - Highest five-day precipitation amount per time period	170
2.16.26.ECASDII - Simple daily intensity index per time period	170
2.16.27.ECASU - Summer days index per time period	171
2.16.28.ECATG10P - Cold days percent wrt 10th percentile of reference period	172
2.16.29.ECATG90P - Warm days percent wrt 90th percentile of reference period	172
2.16.30.ECATN10P - Cold nights percent wrt 10th percentile of reference period	173
2.16.31.ECATN90P - Warm nights percent wrt 90th percentile of reference period	173
2.16.32.ECATR - Tropical nights index per time period	174
2.16.33.ECATX10P - Very cold days percent wrt 10th percentile of reference period	174
2.16.34.ECATX90P - Very warm days percent wrt 90th percentile of reference period	175
A. Grid description examples	177
A.1. Example of a curvilinear grid description	177
A.2. Example description for an unstructured grid	178
Operator index	179

1. Introduction

The Climate Data Operators (**CDO**) software are a collection of many operators for standard processing of climate and NWP model output. The operators include simple statistical and arithmetic functions, data selection and subsampling tools, and spatial interpolation. **CDO** was developed to have the same set of processing functions for GRIB [GRIB] and netCDF [netCDF] datasets in one package.

The Climate Data Interface [CDI] is used for the fast and file format independent access to GRIB and netCDF datasets. The local MPI-MET data formats SERVICE, EXTRA and IEG are also supported.

There are some limitations for GRIB and netCDF datasets. A GRIB dataset has to be consistent, similar to netCDF. That means all time steps needs to have the same variables, and within a time step each variable may occur only once. NetCDF datasets are only supported for the classic data model and arrays up to 4 dimensions. These dimensions should only be used by the horizontal and vertical grid and the time. The netCDF attributes should follow the GDT, COARDS or CF Conventions.

The user interface and some operators are similar to the PINGO [PINGO] package. There are also some operators with the same name as in PINGO but with a different meaning. Appendix A gives an overview of those operators.

The main **CDO** features are:

- More than 400 operators available
- Modular design and easily extendable with new operators
- Very simple UNIX command line interface
- A dataset can be processed by several operators, without storing the interim results in files
- Most operators handle datasets with missing values
- Fast processing of large datasets
- Support of many different grid types
- Tested on many UNIX/Linux systems, Cygwin, and MacOS-X

1.1. Building from sources

This section describes how to build **CDO** from the sources on a UNIX system. **CDO** uses the GNU configure and build system for compilation. The only requirement is a working ANSI C99 compiler.

First go to the [download](http://code.zmaw.de/projects/cdo) page (<http://code.zmaw.de/projects/cdo>) to get the latest distribution, if you do not have it yet.

To take full advantage of **CDO** features the following additional libraries should be installed:

- Unidata [netCDF](http://www.unidata.ucar.edu/packages/netcdf) library (<http://www.unidata.ucar.edu/packages/netcdf>) version 3 or higher. This is needed to process netCDF [netCDF] files with **CDO**.
- The ECMWF [GRIB-API](http://www.ecmwf.int/products/data/software/grib_api.html) (http://www.ecmwf.int/products/data/software/grib_api.html) version 1.9.5 or higher. This library is needed to process GRIB2 files with **CDO**.
- HDF5 [szip](http://www.hdfgroup.org/doc_resource/SZIP) library (http://www.hdfgroup.org/doc_resource/SZIP) version 2.1 or higher. This is needed to process szip compressed GRIB [GRIB] files with **CDO**.

- **HDF5** library (<http://www.hdfgroup.org/HDF5>) version 1.6 or higher.
This is needed to import CM-SAF [[CM-SAF](#)] HDF5 files with the **CDO** operator **import_cmsaf**.
- **PROJ.4** library (<http://trac.osgeo.org/proj>) version 4.6 or higher.
This is needed to convert Sinusoidal and Lambert Azimuthal Equal Area coordinates to geographic coordinates, for e.g. remapping.

1.1.1. Compilation

Compilation is done by performing the following steps:

1. Unpack the archive, if you haven't done that yet:

```
gunzip cdo-$VERSION.tar.gz    # uncompress the archive
tar xf cdo-$VERSION.tar       # unpack it
cd cdo-$VERSION
```

2. Run the configure script:

```
./configure
```

- Optionally with netCDF [[netCDF](#)] support:

```
./configure --with-netcdf=<netCDF root directory>
```

- The GRIB2 configuration depends on the GRIB_API installation! Here is an example GRIB2 configuration with a JASPER enabled GRIB_API version:

```
./configure --with-grib_api=<GRIB_API root directory> \
--with-jasper=<JASPER root directory>
```

For an overview of other configuration options use

```
./configure --help
```

3. Compile the program by running make:

```
make
```

The program should compile without problems and the binary (**cdo**) should be available in the **src** directory of the distribution.

1.1.2. Installation

After the compilation of the source code do a **make install**, possibly as root if the destination permissions require that.

```
make install
```

The binary is installed into the directory **<prefix>/bin**. **<prefix>** defaults to **/usr/local** but can be changed with the **--prefix** option of the configure script.

Alternatively, you can also copy the binary from the **src** directory manually to some **bin** directory in your search path.

1.2. Usage

This section describes how to use **CDO**. The syntax is:

```
cdo [ Options ] Operator1 [ -Operator2 [ -OperatorN ] ]
```

1.2.1. Options

All options have to be placed before the first operator. The following options are available for all operators:

- a Generate an absolute time axis.
- b <nbits> Set the number of bits for the output precision. The valid precisions depend on the file format:

<format>	<nbits>
grb, grb2	1 - 24
nc, nc2, nc4	I8/I16/I32/F32/F64
srv, ext, ieg	F32/F64

For **srv**, **ext** and **ieg** format the letter **L** or **B** can be added to set the byteorder to Little or Big endian.

- f <format> Set the output file format. The valid file formats are:

File format	<format>
GRIB version 1	grb
GRIB version 2	grb2
netCDF	nc
netCDF version 2 (64-bit)	nc2
netCDF-4 classic (HDF5)	nc4
SERVICE	srv
EXTRA	ext
IEG	ieg

GRIB2 is only available if **CDO** was compiled with GRIB_API support and all netCDF file types are only available if **CDO** was compiled with netCDF support!

- g <grid> Define the default grid description by name or from file (see chapter 1.3 on page 10). Available grid names are: **r<NX>x<NY>**, **lon=<LON>/lat=<LAT>**, **n<N>**, **gme<NI>**
- h Help information for the operators.
- M Switch to indicate that the I/O streams have missing values.
- m <missval> Set the default missing value (default: **-9e+33**).
- O Overwrite existing output file, if checked.
Existing output file is checked only for: **ens<STAT>**, **merge**, **mergetime**
- Q Sort netCDF variable names.
- R Convert GRIB1 data from reduced to regular grid (only with cgribex lib).
- r Generate a relative time axis.
- s Silent mode.
- t <partab> Set the default parameter table name or file (see chapter 1.6 on page 14).
Predefined tables are: **echam4 echam5 echam6 mpiom1 ecmwf remo**
- V Print the version number.
- v Print extra details for some operators.
- z **gzip** SZIP compression of GRIB1 records.
- jpeg** JPEG compression of GRIB2 records.
- zip** Deflate compression of netCDF4 variables.

1.2.2. Operators

There are more than 400 operators available. A detailed description of all operators can be found in the [Reference Manual](#) section.

1.2.3. Combining operators

All operators with a fixed number of input streams and one output stream can pipe the result directly to an other operator. The operator must begin with "-", in order to combine it with others. This can improve the performance by:

- reducing unnecessary disk I/O
- parallel processing

Use

```
cdo sub -dayavg ifile2 -timavg ifile1 ofile
```

instead of

```
cdo timavg ifile1 tmp1
cdo dayavg ifile2 tmp2
cdo sub tmp2 tmp1 ofile
rm tmp1 tmp2
```

Combining of operators is implemented over POSIX Threads (pthread). Therefore this **CDO** feature is not available on operating systems without POSIX Threads support.

1.2.4. Operator parameter

Some operators need one or more parameter. A list of parameter is indicated by the separator ','.

- STRING

Unquoted characters without blanks and tabs. The following command select the variables with the names `pressure` and `tsurf`:

```
cdo selvar,pressure,tsurf ifile ofile
```

- FLOAT

Floating point number in any representation. The following command sets the range between 0 and 273.15 of all fields to missing value:

```
cdo setrtomiss,0,273.15 ifile ofile
```

- INTEGER

A range of integer parameter can be specified by *first/last[/inc]*. To select the days 5, 6, 7, 8 and 9 use:

```
cdo selday,5/9 ifile ofile
```

The result is the same as:

```
cdo selday,5,6,7,8,9 ifile ofile
```

1.3. Grid description

In the following situations it is necessary to give a description of a horizontal grid:

- Changing the grid description (operator: [setgrid](#))
- Horizontal interpolation (operator: [remapXXX](#) and [genXXX](#))
- Generating of variables (operator: [const](#), [random](#))

As now described, there are several possibilities to define a horizontal grid. Predefined grids are available for global regular, gaussian or icosahedral-hexagonal GME grids.

1.3.1. Predefined grids

The following pre-defined grid names are available: `r<NX>x<NY>`, `lon=<LON>/lat=<LAT>`, `n<N>` and `gme<NI>`

Global regular grid: `r<NX>x<NY>`

`r<NX>x<NY>` defines a global regular lon/lat grid. The number of the longitudes `<NX>` and the latitudes `<NY>` can be selected at will. The longitudes start at 0° with an increment of $(360/\text{<NX>})^\circ$. The latitudes go from south to north with an increment of $(180/\text{<NY>})^\circ$.

One grid point: `lon=<LON>/lat=<LAT>`

`lon=<LON>/lat=<LAT>` defines a lon/lat grid with only one grid point.

Global Gaussian grid: `n<N>`

`n<N>` defines a global Gaussian grid. `N` specifies the number of latitudes lines between the Pole and the Equator. The longitudes start at 0° with an increment of $(360/\text{nlon})^\circ$. The gaussian latitudes go from north to south.

Global icosahedral-hexagonal GME grid: `gme<NI>`

`gme<NI>` defines a global icosahedral-hexagonal GME grid. `NI` specifies the number of intervals on a main triangle side.

1.3.2. Grids from data files

You can use the grid description from an other datafile. The format of the datafile and the grid of the data field must be supported by this program. Use the operator '[sinfo](#)' to get short informations about your variables and the grids. If there are more then one grid in the datafile the grid description of the first variable will be used.

1.3.3. SCRIP grids

SCRIP is a Spherical Coordinate Remapping and Interpolation Package. It uses a common grid description in netCDF. You can use it to describe curvilinear grids or unstructured grid cells. For more information about this format see [\[SCRIP\]](#). This grid description format is only available if the program was compiled with netCDF support.

SCRIP grid description example of a curvilinear MPIOM [\[MPIOM\]](#) GROB3 grid (only the netCDF header):

```
netcdf grob3s {
  dimensions:
    grid_size = 12120 ;
    grid_xsize = 120 ;
    grid_ysize = 101 ;
    grid_corners = 4 ;
    grid_rank = 2 ;
  variables:
    int grid_dims(grid_rank) ;
    float grid_center_lat(grid_ysize, grid_xsize) ;
      grid_center_lat:units = "degrees" ;
      grid_center_lat:bounds = "grid_corner_lat" ;
    float grid_center_lon(grid_ysize, grid_xsize) ;
      grid_center_lon:units = "degrees" ;
      grid_center_lon:bounds = "grid_corner_lon" ;
    int grid_imask(grid_ysize, grid_xsize) ;
      grid_imask:units = "unitless" ;
      grid_imask:coordinates = "grid_center_lon grid_center_lat" ;
    float grid_corner_lat(grid_ysize, grid_xsize, grid_corners) ;
      grid_corner_lat:units = "degrees" ;
    float grid_corner_lon(grid_ysize, grid_xsize, grid_corners) ;
      grid_corner_lon:units = "degrees" ;

  // global attributes:
    :title = "grob3s" ;
}
```

1.3.4. PINGO grids

PINGO uses a very simple grid description in ASCII format to describe regular longitude/latitude or global gaussian grids. All PINGO grid description files are supported by **CDO**. For more information about this format see [\[PINGO\]](#).

PINGO grid description example of a T21 gaussian grid:

```
Grid Description File
(Comments start at non digit characters and end at end of line)
First part: The dimensions.
64 32 = Number of longitudes and latitudes
Second part: The listed longitudes.
2 means equidistant longitudes
0.000000 5.625000 = Most western and second most western longitude
Third part: The listed latitudes.
32 means all 32 latitudes are given in the following list:
85.761 80.269 74.745 69.213 63.679 58.143 52.607 47.070
41.532 35.995 30.458 24.920 19.382 13.844 8.307 2.769
-2.769 -8.307 -13.844 -19.382 -24.920 -30.458 -35.995 -41.532
-47.070 -52.607 -58.143 -63.679 -69.213 -74.745 -80.269 -85.761
```

1.3.5. CDO grids

All supported grids can also be described with the **CDO** grid description. The following keywords can be used to describe a grid:

Keyword	Datatype	Description
gridtype	STRING	type of the grid (gaussian, lonlat, curvilinear, unstructured)
gridsize	INTEGER	size of the grid
xsize	INTEGER	size in x direction (number of longitudes)
ysize	INTEGER	size in y direction (number of latitudes)
xvals	FLOAT ARRAY	x values of the grid
yvals	FLOAT ARRAY	y values of the grid
xnpole	FLOAT	x value of the north pole (rotated grid)
ynpole	FLOAT	y value of the north pole (rotated grid)
nvertex	INTEGER	number of the vertices for all grid cells
xbounds	FLOAT ARRAY	x bounds of each gridbox
ybounds	FLOAT ARRAY	y bounds of each gridbox
xfirst, xinc	FLOAT, FLOAT	macros to define xvals with a constant increment
yfirst, yinc	FLOAT, FLOAT	macros to define yvals with a constant increment

Which keywords are necessary depends on the gridtype. The following table gives an overview of the default values or the size with respect to the different grid types.

gridtype	lonlat	gaussian	curvilinear	unstructured
gridsize	xsize*ysize	xsize*ysize	xsize*ysize	ncell
xsize	nlon	nlon	nlon	gridsize
ysize	nlat	nlat	nlat	gridsize
xvals	xsize	xsize	gridsize	gridsize
yvals	ysize	ysize	gridsize	gridsize
xnpole	0			
ynpole	90			
nvertex	2	2	4	nv
xbounds	2*xsize	2*xsize	4*gridsize	nv*gridsize
ybounds	2*ysize	2*ysize	4*gridsize	nv*gridsize

The keywords nvertex, xbounds and ybounds are optional if area weights are not needed.

CDO grid description example of a T21 gaussian grid:

gridtype	=	gaussian							
xsize	=	64							
ysize	=	32							
xfirst	=	0							
xinc	=	5.625							
yvals	=	85.76	80.27	74.75	69.21	63.68	58.14	52.61	47.07
		41.53	36.00	30.46	24.92	19.38	13.84	8.31	2.77
		-2.77	-8.31	-13.84	-19.38	-24.92	-30.46	-36.00	-41.53
		-47.07	-52.61	-58.14	-63.68	-69.21	-74.75	-80.27	-85.76

CDO grid description example of a global regular grid with 60x30 points:

gridtype	=	lonlat							
xsize	=	60							
ysize	=	30							
xfirst	=	-177							
xinc	=	6							
yfirst	=	-87							
yinc	=	6							

For a lon/lat grid with a rotated pole, the north pole must be defined. As far as you define the keywords xnpole/ynpole all coordinate values are for the rotated system.

CDO grid description example of a regional rotated lon/lat grid:

```

gridtype = lonlat
xsize    = 81
ysize    = 91
xfirst   = -19.5
xinc     = 0.5
yfirst   = -25.0
yinc     = 0.5
xnpole   = -170
ynpole   = 32.5

```

Example **CDO** descriptions of a curvilinear and an unstructured grid can be found in [Appendix B](#).

1.4. Z-axis description

Sometimes it is necessary to change the description of a z-axis. This can be done with the operator [setzaxis](#). This operator needs an ASCII formatted file with the description of the z-axis. The following keywords can be used to describe a z-axis:

Keyword	Datatype	Description
zaxistype	STRING	type of the z-axis
size	INTEGER	number of levels
levels	FLOAT ARRAY	values of the levels
lbounds	FLOAT ARRAY	lower level bounds
ubounds	FLOAT ARRAY	upper level bounds
vctsize	INTEGER	number of vertical coordinate parameters
vct	FLOAT ARRAY	vertical coordinate table

The keywords **lbounds** and **ubounds** are optional. **vctsize** and **vct** are only necessary to define hybrid model levels.

Available z-axis types:

Z-axis type	Description	Units
surface	Surface	
pressure	Pressure level	pascal
hybrid	Hybrid model level	
height	Height above ground	meter
depth_below_sea	Depth below sea level	meter
depth_below_land	Depth below land surface	centimeter
isentropic	Isentropic (theta) level	kelvin

Z-axis description example for pressure levels 100, 200, 500, 850 and 1000 hPa:

```

zaxistype = pressure
size      = 5
levels    = 10000 20000 50000 85000 100000

```

Z-axis description example for ECHAM5 L19 hybrid model levels:

```

zaxistype = hybrid
size      = 19
levels    = 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
vctsize   = 40
vct       = 0 2000 4000 6046.10938 8267.92578 10609.5117 12851.1016 14698.5
            15861.125 16116.2383 15356.9258 13621.4609 11101.5625 8127.14453
            5125.14062 2549.96875 783.195068 0 0 0
            0 0 0 0.000338993268 0.00335718691 0.0130700432 0.0340771675
            0.0706498027 0.12591666 0.201195419 0.295519829 0.405408859
            0.524931908 0.646107674 0.759697914 0.856437683 0.928747177
            0.972985268 0.992281914 1

```

Note that the `vctsize` is twice the number of levels plus two and the vertical coordinate table must be specified for the level interfaces.

1.5. Time axis

A time axis describes the time for every timestep. Two time axis types are available: absolute time and relative time axis. **CDO** tries to maintain the actual type of the time axis for all operators. Some time range statistic operators create an absolute time axis (e.g. `timsel<STAT>`, `run<STAT>`, `seas<STAT>`, ...).

1.5.1. Absolute time

An absolute time axis has the current time to each time step. It can be used without knowledge of the calendar. This is preferably used by climate models. In netCDF files the absolute time axis is represented by the unit of the time: `"day as %Y%m%d.%f"`.

1.5.2. Relative time

A relative time is the time relative to a fixed reference time. The current time results from the reference time and the elapsed interval. The result depends on the calendar used. **CDO** supports the standard Gregorian, proleptic Gregorian, 360 days, 365 days and 366 days calendars. The relative time axis is preferably used by numerical weather prediction models. In netCDF files the relative time axis is represented by the unit of the time: `"time-units since reference-time"`, e.g. `"days since 1989-6-15 12:00"`.

1.5.3. Conversion of the time

Some programs which work with netCDF data can only process relative time axes. Therefore it may be necessary to convert from an absolute into a relative time axis. This conversion can be done for each operator with the **CDO** option `'-r'`. To convert a relative into an absolute time axis use the **CDO** option `'-a'`.

1.6. Parameter table

A parameter table is an ASCII formatted file to convert code numbers to variable names. Each variable has one line with its code number, name and a description with optional units in a blank separated list. It can only be used for GRIB, SERVICE, EXTRA and IEG formatted files. The **CDO** option `'-t <partab>'` sets the default parameter table for all input files. Use the operator `'setpartab'` to set the parameter table for a specific file.

Example of a **CDO** parameter table:

134	aps	surface pressure [Pa]
141	sn	snow depth [m]
147	ahfl	latent heat flux [W/m**2]
172	slm	land sea mask
175	albedo	surface albedo
211	siced	ice depth [m]

1.7. Missing values

Most operators can handle missing values. The default missing value for GRIB, SERVICE, EXTRA and IEG files is $-9e + 33$. The **CDO** option `'-m <missval>'` overwrites the default missing value. In netCDF

files the variable attribute `'_FillValue'` is used as a missing value. The operator `'setmissval'` can be used to set a new missing value.

The **CDO** use of the missing value is shown in the following tables, where one table is printed for each operation. The operations are applied to arbitrary numbers a , b , the special case 0, and the missing value *miss*. For example the table named "addition" shows that the sum of an arbitrary number a and the missing value is the missing value, and the table named "multiplication" shows that 0 multiplied by missing value results in 0.

addition	b		miss
a	$a + b$		<i>miss</i>
miss	<i>miss</i>		<i>miss</i>
subtraction	b		miss
a	$a - b$		<i>miss</i>
miss	<i>miss</i>		<i>miss</i>
multiplication	b	0	miss
a	$a * b$	0	<i>miss</i>
0	0	0	0
miss	<i>miss</i>	0	<i>miss</i>
division	b	0	miss
a	a/b	<i>miss</i>	<i>miss</i>
0	0	<i>miss</i>	<i>miss</i>
miss	<i>miss</i>	<i>miss</i>	<i>miss</i>
maximum	b		miss
a	$\max(a, b)$		a
miss	b		<i>miss</i>
minimum	b		miss
a	$\min(a, b)$		a
miss	b		<i>miss</i>
sum	b		miss
a	$a + b$		a
miss	b		<i>miss</i>

The handling of missing values by the operations "minimum" and "maximum" may be surprising, but the definition given here is more consistent with that expected in practice. Mathematical functions (e.g. *log*, *sqr*t, etc.) return the missing value if an argument is the missing value or an argument is out of range.

All statistical functions ignore missing values, treating them as not belonging to the sample, with the side-effect of a reduced sample size.

1.7.1. Mean and average

An artificial distinction is made between the notions mean and average. The mean is regarded as a statistical function, whereas the average is found simply by adding the sample members and dividing the result by the sample size. For example, the mean of 1, 2, *miss* and 3 is $(1 + 2 + 3)/3 = 2$, whereas the average is $(1 + 2 + \text{miss} + 3)/4 = \text{miss}/4 = \text{miss}$. If there are no missing values in the sample, the average and mean are identical.

2. Reference manual

This section gives a description of all operators. Related operators are grouped to modules. For easier description all single input files are named `ifile` or `ifile1`, `ifile2`, etc., and an unlimited number of input files are named `ifiles`. All output files are named `ofile` or `ofile1`, `ofile2`, etc. Further the following notion is introduced:

$i(t)$ Timestep t of `ifile`
 $i(t, x)$ Element number x of the field at timestep t of `ifile`
 $o(t)$ Timestep t of `ofile`
 $o(t, x)$ Element number x of the field at timestep t of `ofile`

2.1. Information

This section contains modules to print information about datasets. All operators print their results to standard output.

Here is a short overview of all operators in this section:

info	Dataset information listed by parameter identifier
infn	Dataset information listed by parameter name
map	Dataset information and simple map
sinfo	Short information listed by parameter identifier
sinfn	Short information listed by parameter name
diff	Compare two datasets listed by parameter id
diffn	Compare two datasets listed by parameter name
npar	Number of parameters
nlevel	Number of levels
nyear	Number of years
nmon	Number of months
ndate	Number of dates
ntime	Number of time steps
showformat	Show file format
showcode	Show code numbers
showname	Show variable names
showstdname	Show standard names
showlevel	Show levels
showltype	Show GRIB level types
showyear	Show years
showmon	Show months
showdate	Show date information
showtime	Show time information
showtimestamp	Show timestamp
pardes	Parameter description
griddes	Grid description
zaxisdes	Z-axis description
vct	Vertical coordinate table

2.1.1. INFO - Information and simple statistics

Synopsis

```
<operator> ifiles
```

Description

This module writes information about the structure and contents of all input files to standard output. All input files need to have the same structure with the same variables on different time steps. The information displayed depends on the chosen operator.

Operators

- info** Dataset information listed by parameter identifier
Prints information and simple statistics for each field of all input datasets. For each field the operator prints one line with the following elements:
- Date and Time
 - Parameter identifier and Level
 - Size of the grid and number of Missing values
 - Minimum, Mean and Maximum
The mean value is computed without the use of area weights!
- infon** Dataset information listed by parameter name
The same as operator [info](#) but using the name instead of the identifier to label the parameter.
- map** Dataset information and simple map
Prints information, simple statistics and a map for each field of all input datasets. The map will be printed only for fields on a regular lon/lat grid.

Example

To print information and simple statistics for each field of a dataset use:

```
cdo infon ifile
```

This is an example result of a dataset with one 2D parameter over 12 time steps:

-1 :	Date	Time	Name	Level	Size	Miss :	Minimum	Mean	Maximum
1 :	1987-01-31	12:00:00	SST	0	2048	1361 :	232.77	266.65	305.31
2 :	1987-02-28	12:00:00	SST	0	2048	1361 :	233.64	267.11	307.15
3 :	1987-03-31	12:00:00	SST	0	2048	1361 :	225.31	267.52	307.67
4 :	1987-04-30	12:00:00	SST	0	2048	1361 :	215.68	268.65	310.47
5 :	1987-05-31	12:00:00	SST	0	2048	1361 :	215.78	271.53	312.49
6 :	1987-06-30	12:00:00	SST	0	2048	1361 :	212.89	272.80	314.18
7 :	1987-07-31	12:00:00	SST	0	2048	1361 :	209.52	274.29	316.34
8 :	1987-08-31	12:00:00	SST	0	2048	1361 :	210.48	274.41	315.83
9 :	1987-09-30	12:00:00	SST	0	2048	1361 :	210.48	272.37	312.86
10 :	1987-10-31	12:00:00	SST	0	2048	1361 :	219.46	270.53	309.51
11 :	1987-11-30	12:00:00	SST	0	2048	1361 :	230.98	269.85	308.61
12 :	1987-12-31	12:00:00	SST	0	2048	1361 :	241.25	269.94	309.27

2.1.2. SINFO - Short information

Synopsis

```
<operator> ifiles
```

Description

This module writes information about the structure of `ifiles` to standard output. `ifiles` is an unlimited number of input files. All input files need to have the same structure with the same variables on different time steps. The information displayed depends on the chosen operator.

Operators

sinfo Short information listed by parameter identifier
Prints short information of a dataset. The information is divided into 4 sections. Section 1 prints one line per parameter with the following information:

- institute and source
- parameter identifier
- horizontal grid size and number
- number of vertical levels and z-axis number

Section 2 and 3 gives a short overview of all horizontal and vertical grids. And the last section contains short information of the time axis.

sinfon Short information listed by parameter name
The same as operator [sinfo](#) but using the name instead of the identifier to label the parameter.

Example

To print short information of a dataset use:

```
cdo sinfon ifile
```

This is the result of an ECHAM5 dataset with 3 parameter over 12 time steps:

-1 :	Institut	Source	Name	Time	Typ	Grid	Size	Num	Levels	Num
1 :	MPIMET	ECHAM5	GEOSP	con	F32		2048	1	1	1
2 :	MPIMET	ECHAM5	T	var	F32		2048	1	4	2
3 :	MPIMET	ECHAM5	TSURF	var	F32		2048	1	1	1

Horizontal grids :

1 :	gaussian	> size	: dim = 2048	nlon = 64	nlat = 32
		longitude	: first = 0	last = 354.375	inc = 5.625
		latitude	: first = 85.7605871	last = -85.7605871	

Vertical grids :

1 :	surface	: 0
2 :	pressure	Pa : 92500 85000 50000 20000

Time axis : 12 steps

YYYY-MM-DD	hh:mm:ss	YYYY-MM-DD	hh:mm:ss	YYYY-MM-DD	hh:mm:ss	YYYY-MM-DD	hh:mm:ss
1987-01-31	12:00:00	1987-02-28	12:00:00	1987-03-31	12:00:00	1987-04-30	12:00:00
1987-05-31	12:00:00	1987-06-30	12:00:00	1987-07-31	12:00:00	1987-08-31	12:00:00
1987-09-30	12:00:00	1987-10-31	12:00:00	1987-11-30	12:00:00	1987-12-31	12:00:00

2.1.3. DIFF - Compare two datasets field by field

Synopsis

```
<operator> ifile1 ifile2
```

Description

Compares the contents of two datasets field by field. The input datasets need to have the same structure and its fields need to have the same header information and dimensions.

Operators

diff Compare two datasets listed by parameter id
Provides statistics on differences between two datasets. For each pair of fields the operator prints one line with the following information:

- Date and Time
- Parameter identifier and Level
- Size of the grid and number of Missing values
- Occurrence of coefficient pairs with different signs (S)
- Occurrence of zero values (Z)
- Maxima of absolute difference of coefficient pairs
- Maxima of relative difference of non-zero coefficient pairs with equal signs

$$Absdiff(t, x) = |i_1(t, x) - i_2(t, x)|$$

$$Reldiff(t, x) = \frac{|i_1(t, x) - i_2(t, x)|}{\max(|i_1(t, x)|, |i_2(t, x)|)}$$

diffn Compare two datasets listed by parameter name
The same as operator [diff](#). Using the name instead of the identifier to label the parameter.

Example

To print the difference for each field of two datasets use:

```
cdo diffn ifile1 ifile2
```

This is an example result of two datasets with one 2D parameter over 12 time steps:

	Date	Time	Name	Level	Size	Miss	: S Z	Max_Absdiff	Max_Reldiff
1	: 1987-01-31	12:00:00	SST	0	2048	1361	: F F	0.00010681	4.1660e-07
2	: 1987-02-28	12:00:00	SST	0	2048	1361	: F F	6.1035e-05	2.3742e-07
3	: 1987-03-31	12:00:00	SST	0	2048	1361	: F F	7.6294e-05	3.3784e-07
4	: 1987-04-30	12:00:00	SST	0	2048	1361	: F F	7.6294e-05	3.5117e-07
5	: 1987-05-31	12:00:00	SST	0	2048	1361	: F F	0.00010681	4.0307e-07
6	: 1987-06-30	12:00:00	SST	0	2048	1361	: F F	0.00010681	4.2670e-07
7	: 1987-07-31	12:00:00	SST	0	2048	1361	: F F	9.1553e-05	3.5634e-07
8	: 1987-08-31	12:00:00	SST	0	2048	1361	: F F	7.6294e-05	2.8849e-07
9	: 1987-09-30	12:00:00	SST	0	2048	1361	: F F	7.6294e-05	3.6168e-07
10	: 1987-10-31	12:00:00	SST	0	2048	1361	: F F	9.1553e-05	3.5001e-07
11	: 1987-11-30	12:00:00	SST	0	2048	1361	: F F	6.1035e-05	2.3839e-07
12	: 1987-12-31	12:00:00	SST	0	2048	1361	: F F	9.3553e-05	3.7624e-07

2.1.4. NINFO - Print the number of parameters, levels or times

Synopsis

`<operator> ifile`

Description

This module prints the number of variables, levels or times of the input dataset.

Operators

npar	Number of parameters Prints the number of parameters (variables).
nlevel	Number of levels Prints the number of levels for each variable.
nyear	Number of years Prints the number of different years.
nmon	Number of months Prints the number of different combinations of years and months.
ndate	Number of dates Prints the number of different dates.
ntime	Number of time steps Prints the number of time steps.

Example

To print the number of parameters (variables) in a dataset use:

```
cdo npar ifile
```

To print the number of months in a dataset use:

```
cdo nmon ifile
```

2.1.5. SHOWINFO - Show variables, levels or times

Synopsis

```
<operator> ifile
```

Description

This module prints the format, variables, levels or times of the input dataset.

Operators

showformat	Show file format Prints the file format of the input dataset.
showcode	Show code numbers Prints the code number of all variables.
showname	Show variable names Prints the name of all variables.
showstdname	Show standard names Prints the standard name of all variables.
showlevel	Show levels Prints all levels for each variable.
showltype	Show GRIB level types Prints the GRIB level type for all z-axes.
showyear	Show years Prints all years.
showmon	Show months Prints all months.
showdate	Show date information Prints date information of all time steps (format YYYY-MM-DD).
showtime	Show time information Prints time information of all time steps (format hh:mm:ss).
showtimestamp	Show timestamp Prints timestamp of all time steps (format YYYY-MM-DDThh:mm:ss).

Example

To print the code number of all variables in a dataset use:

```
cdo showcode ifile
```

This is an example result of a dataset with three variables:

```
129 130 139
```

To print all months in a dataset use:

```
cdo showmon ifile
```

This is an examples result of a dataset with an annual cycle:

```
1 2 3 4 5 6 7 8 9 10 11 12
```

2.1.6. FILEDES - Dataset description

Synopsis

```
<operator> ifile
```

Description

This module prints the description of the parameters, the grids, the z-axis or the vertical coordinate table.

Operators

pardes	Parameter description Prints a table with a description of all variables. For each variable the operator prints one line listing the code, name, description and units.
griddes	Grid description Prints the description of all grids.
zaxisdes	Z-axis description Prints the description of all z-axes.
vct	Vertical coordinate table Prints the vertical coordinate table.

Example

Assume all variables of the dataset are on a Gaussssian N16 grid. To print the grid description of this dataset use:

```
cdo griddes ifile
```

Result:

```
gridtype   : gaussian
gridsize   : 2048
xname      : lon
xlongname   : longitude
xunits     : degrees_east
yname      : lat
ylongname   : latitude
yunits     : degrees_north
xsize      : 64
ysize      : 32
xfirst     : 0
xinc       : 5.625
yvals      : 85.76058 80.26877 74.74454 69.21297 63.67863 58.1429 52.6065
              47.06964 41.53246 35.99507 30.4575 24.91992 19.38223 13.84448
              8.306702 2.768903 -2.768903 -8.306702 -13.84448 -19.38223
              -24.91992 -30.4575 -35.99507 -41.53246 -47.06964 -52.6065
              -58.1429 -63.67863 -69.21297 -74.74454 -80.26877 -85.76058
```

2.2. File operations

This section contains modules to perform operations on files.

Here is a short overview of all operators in this section:

copy	Copy datasets
cat	Concatenate datasets
replace	Replace variables
merge	Merge datasets with different fields
mergetime	Merge datasets sorted by date and time
splitcode	Split code numbers
splitparam	Split parameter identifiers
splitname	Split variable names
splitlevel	Split levels
splitgrid	Split grids
splitzaxis	Split z-axes
splittabnum	Split parameter table numbers
splithour	Split hours
splitday	Split days
splitmon	Split months
splitseas	Split seasons
splityear	Split years
splitsel	Split time selection

2.2.1. COPY - Copy datasets

Synopsis

```
<operator> ifiles ofile
```

Description

This module contains operators to copy or concatenate datasets. **ifiles** is an unlimited number of input files. All input files need to have the same structure with the same variables on different time steps.

Operators

copy	Copy datasets Copies all input datasets to ofile .
cat	Concatenate datasets Concatenates all input datasets and appends the result to the end of ofile . If ofile does not exist it will be created.

Example

To change the format of a dataset to netCDF use:

```
cdo -f nc copy ifile ofile.nc
```

Add the option '-r' to create a relative time axis, as is required for proper recognition by GrADS or Ferret:

```
cdo -r -f nc copy ifile ofile.nc
```

To concatenate 3 datasets with different time steps of the same variables use:

```
cdo copy ifile1 ifile2 ifile3 ofile
```

If the output dataset already exists and you wish to extend it with more time steps use:

```
cdo cat ifile1 ifile2 ifile3 ofile
```

2.2.2. REPLACE - Replace variables

Synopsis

```
replace ifile1 ifile2 ofile
```

Description

Replaces all common variables of `ifile2` and `ifile1` with those of `ifile1` and write the result to `ofile`. Both input datasets need to have the same number of time steps.

Example

Assume the first input dataset `ifile1` has three variables with the names `geosp`, `t` and `tslm1` and the second input dataset `ifile2` has only the variable `tslm1`. To replace the variable `tslm1` in `ifile1` with `tslm1` from `ifile2` use:

```
cdo replace ifile1 ifile2 ofile
```

2.2.3. MERGE - Merge datasets

Synopsis

```
<operator> ifiles ofile
```

Description

This module reads datasets from several input files, merges them and writes the resulting dataset to `ofile`.

Operators

merge	Merge datasets with different fields Merges time series of different fields from several input datasets. The number of fields per time step written to <code>ofile</code> is the sum of the field numbers per time step in all input datasets. The time series on all input datasets are required to have different fields and the same number of time steps.
mergetime	Merge datasets sorted by date and time Merges all time steps of all input files sorted by date and time. All input files need to have the same structure with the same variables on different time steps. After this operation every input time step is in <code>ofile</code> and all time steps are sorted by date and time.

Example

Assume three datasets with the same number of time steps and different variables in each dataset. To merge these datasets to a new dataset use:

```
cdo merge ifile1 ifile2 ifile3 ofile
```

Assume you split a 6 hourly dataset with [splithour](#). This produces four datasets, one for each hour. The following command merges them together:

```
cdo mergetime ifile1 ifile2 ifile3 ifile4 ofile
```

2.2.4. SPLIT - Split a dataset

Synopsis

```
<operator> ifile obase
```

Description

This module splits `ifile` into pieces. The output files will be named `<obase><xxx><suffix>` where `suffix` is the filename extension derived from the file format. `xxx` and the contents of the output files depends on the chosen operator.

Operators

splitcode	Split code numbers Splits a dataset into pieces, one for each different code number. <code>xxx</code> will have three digits with the code number.
splitparam	Split parameter identifiers Splits a dataset into pieces, one for each different parameter identifier. <code>xxx</code> will be a string with the parameter identifier.
splitname	Split variable names Splits a dataset into pieces, one for each variable name. <code>xxx</code> will be a string with the variable name.
splitlevel	Split levels Splits a dataset into pieces, one for each different level. <code>xxx</code> will have six digits with the level.
splitgrid	Split grids Splits a dataset into pieces, one for each different grid. <code>xxx</code> will have two digits with the grid number.
splitzaxis	Split z-axes Splits a dataset into pieces, one for each different z-axis. <code>xxx</code> will have two digits with the z-axis number.
splittabnum	Split parameter table numbers Splits a dataset into pieces, one for each GRIB1 parameter table number. <code>xxx</code> will have three digits with the GRIB1 parameter table number.

Environment

<code>CDO_FILE_SUFFIX</code>	This environment variable can be used to set the default file suffix. This suffix will be added to the output file names instead of the filename extension derived from the file format. Set this variable to <code>NULL</code> to disable the adding of a file suffix.
------------------------------	---

Example

Assume an input GRIB1 dataset with three variables, e.g. code number 129, 130 and 139. To split this dataset into three pieces, one for each code number use:

```
cdo splitcode ifile code
```

Result of `'dir code*'`:

```
code129.grb code130.grb code139.grb
```

2.2.5. SPLITTIME - Split time steps of a dataset

Synopsis

```
<operator> ifile obase
```

Description

This module splits `ifile` into time steps pieces. The output files will be named `<obase><xxx><suffix>` where `suffix` is the filename extension derived from the file format. `xxx` and the contents of the output files depends on the chosen operator.

Operators

splithour	Split hours Splits a file into pieces, one for each different hour. <code>xxx</code> will have two digits with the hour.
splitday	Split days Splits a file into pieces, one for each different day. <code>xxx</code> will have two digits with the day.
splitmon	Split months Splits a file into pieces, one for each different month. <code>xxx</code> will have two digits with the month.
splitseas	Split seasons Splits a file into pieces, one for each different season. <code>xxx</code> will have three characters with the season.
splityear	Split years Splits a file into pieces, one for each different year. <code>xxx</code> will have four digits with the year.

Environment

CDO_FILE_SUFFIX	This environment variable can be used to set the default file suffix. This suffix will be added to the output file names instead of the filename extension derived from the file format. Set this variable to NULL to disable the adding of a file suffix.
------------------------	--

Example

Assume the input GRIB1 dataset has time steps from January to December. To split each month with all variables into one separate file use:

```
cdo splitmon ifile mon
```

Result of `'dir mon*'`:

```
mon01.grb  mon02.grb  mon03.grb  mon04.grb  mon05.grb  mon06.grb
mon07.grb  mon08.grb  mon09.grb  mon10.grb  mon11.grb  mon12.grb
```

2.2.6. SPLITSEL - Split selected time steps

Synopsis

```
splitsel,nsets[,noffset[,nskip]] ifile obase
```

Description

This operator splits `ifile` into pieces, one for each adjacent sequence t_1, \dots, t_n of time steps of the same selected time range. The output files will be named `<obase><nnnnnn><suffix>` where `nnnnnn` is the sequence number and `suffix` is the filename extension derived from the file format.

Parameter

<i>nsets</i>	INTEGER	Number of input time steps for each output file
<i>noffset</i>	INTEGER	Number of input time steps skipped before the first time step range (optional)
<i>nskip</i>	INTEGER	Number of input time steps skipped between time step ranges (optional)

Environment

CDO_FILE_SUFFIX	This environment variable can be used to set the default file suffix. This suffix will be added to the output file names instead of the filename extension derived from the file format. Set this variable to NULL to disable the adding of a file suffix.
-----------------	--

2.3. Selection

This section contains modules to select time steps, fields or a part of a field from a dataset.

Here is a short overview of all operators in this section:

selparam	Select parameters by identifier
delparam	Delete parameters by identifier
selcode	Select parameters by code number
delcode	Delete parameters by code number
selname	Select parameters by name
delname	Delete parameters by name
selstdname	Select parameters by standard name
sellevel	Select levels
selleidx	Select levels by index
selgrid	Select grids
selzaxis	Select z-axes
selltype	Select GRIB level types
seltabnum	Select parameter table numbers
seltimestep	Select time steps
seltime	Select times
selhour	Select hours
selday	Select days
selmon	Select months
selyear	Select years
selseas	Select seasons
seldate	Select dates
selsmon	Select single month
sellonlatbox	Select a longitude/latitude box
selindexbox	Select an index box

2.3.1. SELVAR - Select fields

Synopsis

selparam, params ifile ofile

delparam, params ifile ofile

selcode, codes ifile ofile

delcode, codes ifile ofile

selname, names ifile ofile

delname, names ifile ofile

selstdname, stdnames ifile ofile

sellevel, levels ifile ofile

sellevidx, levidx ifile ofile

selgrid, grids ifile ofile

selzaxis, zaxes ifile ofile

selltype, ltypes ifile ofile

seltabnum, tabnums ifile ofile

Description

This module selects some fields from **ifile** and writes them to **ofile**. The fields selected depends on the chosen operator and the parameters.

Operators

selparam	Select parameters by identifier Selects all fields with parameter identifiers in a user given list.
delparam	Delete parameters by identifier Deletes all fields with parameter identifiers in a user given list.
selcode	Select parameters by code number Selects all fields with code numbers in a user given list.
delcode	Delete parameters by code number Deletes all fields with code numbers in a user given list.
selname	Select parameters by name Selects all fields with parameter names in a user given list.
delname	Delete parameters by name Deletes all fields with parameter names in a user given list.
selstdname	Select parameters by standard name Selects all fields with standard names in a user given list.
sellevel	Select levels Selects all fields with levels in a user given list.
sellevidx	Select levels by index Selects all fields with index of levels in a user given list.
selgrid	Select grids Selects all fields with grids in a user given list.
selzaxis	Select z-axes Selects all fields with z-axes in a user given list.
selltype	Select GRIB level types Selects all fields with GRIB level type in a user given list.
seltabnum	Select parameter table numbers Selects all fields with parameter table numbers in a user given list.

Parameter

<i>params</i>	INTEGER	Comma separated list of parameter identifiers
<i>codes</i>	INTEGER	Comma separated list of code numbers
<i>names</i>	STRING	Comma separated list of variable names
<i>stdnames</i>	STRING	Comma separated list of standard names
<i>levels</i>	FLOAT	Comma separated list of levels
<i>levidx</i>	INTEGER	Comma separated list of index of levels
<i>ltypes</i>	INTEGER	Comma separated list of GRIB level types
<i>grids</i>	STRING	Comma separated list of grid names or numbers
<i>zaxes</i>	STRING	Comma separated list of z-axis names or numbers
<i>tabnums</i>	INTEGER	Comma separated list of parameter table numbers

Example

Assume an input dataset has three variables with the code numbers 129, 130 and 139. To select the variables with the code number 129 and 139 use:

```
cdo selcode,129,139 ifile ofile
```

You can also select the code number 129 and 139 by deleting the code number 130 with:

```
cdo delcode,130 ifile ofile
```

2.3.2. SELTIME - Select time steps

Synopsis

```

se timestep,timesteps ifile ofile

sel time,times ifile ofile

sel hour,hours ifile ofile

sel day,days ifile ofile

sel mon,months ifile ofile

sel year,years ifile ofile

sel seas,seasons ifile ofile

sel date,date1[,date2] ifile ofile

sel smon,month[,nts1[,nts2]] ifile ofile

```

Description

This module selects user specified time steps from **ifile** and writes them to **ofile**. The time steps selected depends on the chosen operator and the parameters.

Operators

se timestep	Select time steps Selects all time steps with a time step in a user given list.
sel time	Select times Selects all time steps with a time in a user given list.
sel hour	Select hours Selects all time steps with a hour in a user given list.
sel day	Select days Selects all time steps with a day in a user given list.
sel mon	Select months Selects all time steps with a month in a user given list.
sel year	Select years Selects all time steps with a year in a user given list.
sel seas	Select seasons Selects all time steps with a month of a season in a user given list.
sel date	Select dates Selects all time steps with a date in a user given range.
sel smon	Select single month Selects a month and optional an unlimited number of time steps before and after this month.

Parameter

<i>timesteps</i>	INTEGER	Comma separated list of time steps
<i>times</i>	STRING	Comma separated list of times (format hh:mm:ss)
<i>hours</i>	INTEGER	Comma separated list of hours
<i>days</i>	INTEGER	Comma separated list of days
<i>months</i>	INTEGER	Comma separated list of months
<i>years</i>	INTEGER	Comma separated list of years
<i>seasons</i>	STRING	Comma separated list of seasons (DJF, MAM, JJA, SON)
<i>date1</i>	STRING	Start date (format YYYY-MM-DDThh:mm:ss)
<i>date2</i>	STRING	End date (format YYYY-MM-DDThh:mm:ss)
<i>nts1</i>	INTEGER	Number of time steps before the selected month [default: 0]
<i>nts2</i>	INTEGER	Number of time steps after the selected month [default: nts1]

2.3.3. SELBOX - Select a box of a field

Synopsis

```
sellonlatbox,lon1,lon2,lat1,lat2 ifile ofile
```

```
selindexbox,idx1,idx2,idy1,idy2 ifile ofile
```

Description

Selects a box of the rectangular understood field. All input fields need to have the same horizontal grid.

Operators

sellonlatbox	Select a longitude/latitude box Selects a longitude/latitude box. The user has to give the longitudes and latitudes of the edges of the box.
selindexbox	Select an index box Selects an index box. The user has to give the indexes of the edges of the box. The index of the left edge may be greater then that of the right edge.

Parameter

<i>lon1</i>	FLOAT	Western longitude
<i>lon2</i>	FLOAT	Eastern longitude
<i>lat1</i>	FLOAT	Southern or northern latitude
<i>lat2</i>	FLOAT	Northern or southern latitude
<i>idx1</i>	INTEGER	Index of first longitude
<i>idx2</i>	INTEGER	Index of last longitude
<i>idy1</i>	INTEGER	Index of first latitude
<i>idy2</i>	INTEGER	Index of last latitude

Example

To select the region with the longitudes from 120E to 90W and latitudes from 20N to 20S from all input fields use:

```
cdo sellonlatbox,120,-90,20,-20 ifile ofile
```

If the input dataset has fields on a Gaussian N16 grid, the same box can be selected with [selindexbox](#) by:

```
cdo selindexbox,23,48,13,20 ifile ofile
```

2.4. Conditional selection

This section contains modules to conditional select field elements. The fields in the first input file are handled as a mask. A value not equal to zero is treated as "true", zero is treated as "false".

Here is a short overview of all operators in this section:

ifthen	If then
ifnotthen	If not then
ifthenelse	If then else
ifthenc	If then constant
ifnotthenc	If not then constant

2.4.1. COND - Conditional select one field

Synopsis

```
<operator> ifile1 ifile2 ofile
```

Description

This module selects field elements from **ifile2** with respect to **ifile1** and writes them to **ofile**. The fields in **ifile1** are handled as a mask. A value not equal to zero is treated as "true", zero is treated as "false". The number of fields in **ifile1** has either to be the same as in **ifile2** or the same as in one time step of **ifile2** or only one. The fields in **ofile** inherit the meta data from **ifile2**.

Operators

ifthen	<p>If then</p> $o(t, x) = \begin{cases} i_2(t, x) & \text{if } i_1([t,]x) \neq 0 \quad \wedge \quad i_1([t,]x) \neq \text{miss} \\ \text{miss} & \text{if } i_1([t,]x) = 0 \quad \vee \quad i_1([t,]x) = \text{miss} \end{cases}$
ifnotthen	<p>If not then</p> $o(t, x) = \begin{cases} i_2(t, x) & \text{if } i_1([t,]x) = 0 \quad \wedge \quad i_1([t,]x) \neq \text{miss} \\ \text{miss} & \text{if } i_1([t,]x) \neq 0 \quad \vee \quad i_1([t,]x) = \text{miss} \end{cases}$

Example

To select all field elements of **ifile2** if the corresponding field element of **ifile1** is greater than 0 use:

```
cdo ifthen ifile1 ifile2 ofile
```

2.4.2. COND2 - Conditional select two fields

Synopsis

```
ifthenelse ifile1 ifile2 ifile3 ofile
```

Description

This operator selects field elements from **ifile2** or **ifile3** with respect to **ifile1** and writes them to **ofile**. The fields in **ifile1** are handled as a mask. A value not equal to zero is treated as "true", zero is treated as "false". The number of fields in **ifile1** has either to be the same as in **ifile2** or the same as in one time step of **ifile2** or only one. **ifile2** and **ifile3** need to have the same number of fields. The fields in **ofile** inherit the meta data from **ifile2**.

$$o(t, x) = \begin{cases} i_2(t, x) & \text{if } i_1([t,]x) \neq 0 \quad \wedge \quad i_1([t,]x) \neq \text{miss} \\ i_3(t, x) & \text{if } i_1([t,]x) = 0 \quad \wedge \quad i_1([t,]x) \neq \text{miss} \\ \text{miss} & \text{if } i_1([t,]x) = \text{miss} \end{cases}$$

Example

To select all field elements of `ifile2` if the corresponding field element of `ifile1` is greater than 0 and from `ifile3` otherwise use:

```
cdo ifthenelse ifile1 ifile2 ifile3 ofile
```

2.4.3. CONDC - Conditional select a constant

Synopsis

```
<operator>,<c> ifile ofile
```

Description

This module creates fields with a constant value or missing value. The fields in `ifile` are handled as a mask. A value not equal to zero is treated as "true", zero is treated as "false".

Operators

ifthenc	If then constant
	$o(t, x) = \begin{cases} c & \text{if } i(t, x) \neq 0 \wedge i(t, x) \neq \text{miss} \\ \text{miss} & \text{if } i(t, x) = 0 \vee i(t, x) = \text{miss} \end{cases}$
ifnotthenc	If not then constant
	$o(t, x) = \begin{cases} c & \text{if } i(t, x) = 0 \wedge i(t, x) \neq \text{miss} \\ \text{miss} & \text{if } i(t, x) \neq 0 \vee i(t, x) = \text{miss} \end{cases}$

Parameter

<code>c</code>	FLOAT	Constant
----------------	-------	----------

Example

To create fields with the constant value 7 if the corresponding field element of `ifile` is greater than 0 use:

```
cdo ifthenc,7 ifile ofile
```


2.5. Comparison

This section contains modules to compare datasets. The resulting field is a mask containing 1 if the comparison is true and 0 if not.

Here is a short overview of all operators in this section:

eq	Equal
ne	Not equal
le	Less equal
lt	Less than
ge	Greater equal
gt	Greater than
eqc	Equal constant
nec	Not equal constant
lec	Less equal constant
ltc	Less than constant
gec	Greater equal constant
gtc	Greater than constant

2.5.1. COMP - Comparison of two fields

Synopsis

```
<operator> ifile1 ifile2 ofile
```

Description

This module compares two datasets field by field. The resulting field is a mask containing 1 if the comparison is true and 0 if not. The number of fields in `ifile1` should be the same as in `ifile2`. One of the input files can contain only one time step or one field. The fields in `ofile` inherit the meta data from `ifile1` or `ifile2`. The type of comparison depends on the chosen operator.

Operators

eq	Equal	$o(t, x) = \begin{cases} 1 & \text{if } i_1(t, x) = i_2(t, x) \quad \wedge \quad i_1(t, x), i_2(t, x) \neq \text{miss} \\ 0 & \text{if } i_1(t, x) \neq i_2(t, x) \quad \wedge \quad i_1(t, x), i_2(t, x) \neq \text{miss} \\ \text{miss} & \text{if } i_1(t, x) = \text{miss} \quad \vee \quad i_2(t, x) = \text{miss} \end{cases}$
ne	Not equal	$o(t, x) = \begin{cases} 1 & \text{if } i_1(t, x) \neq i_2(t, x) \quad \wedge \quad i_1(t, x), i_2(t, x) \neq \text{miss} \\ 0 & \text{if } i_1(t, x) = i_2(t, x) \quad \wedge \quad i_1(t, x), i_2(t, x) \neq \text{miss} \\ \text{miss} & \text{if } i_1(t, x) = \text{miss} \quad \vee \quad i_2(t, x) = \text{miss} \end{cases}$
le	Less equal	$o(t, x) = \begin{cases} 1 & \text{if } i_1(t, x) \leq i_2(t, x) \quad \wedge \quad i_1(t, x), i_2(t, x) \neq \text{miss} \\ 0 & \text{if } i_1(t, x) > i_2(t, x) \quad \wedge \quad i_1(t, x), i_2(t, x) \neq \text{miss} \\ \text{miss} & \text{if } i_1(t, x) = \text{miss} \quad \vee \quad i_2(t, x) = \text{miss} \end{cases}$
lt	Less than	$o(t, x) = \begin{cases} 1 & \text{if } i_1(t, x) < i_2(t, x) \quad \wedge \quad i_1(t, x), i_2(t, x) \neq \text{miss} \\ 0 & \text{if } i_1(t, x) \geq i_2(t, x) \quad \wedge \quad i_1(t, x), i_2(t, x) \neq \text{miss} \\ \text{miss} & \text{if } i_1(t, x) = \text{miss} \quad \vee \quad i_2(t, x) = \text{miss} \end{cases}$
ge	Greater equal	$o(t, x) = \begin{cases} 1 & \text{if } i_1(t, x) \geq i_2(t, x) \quad \wedge \quad i_1(t, x), i_2(t, x) \neq \text{miss} \\ 0 & \text{if } i_1(t, x) < i_2(t, x) \quad \wedge \quad i_1(t, x), i_2(t, x) \neq \text{miss} \\ \text{miss} & \text{if } i_1(t, x) = \text{miss} \quad \vee \quad i_2(t, x) = \text{miss} \end{cases}$
gt	Greater than	$o(t, x) = \begin{cases} 1 & \text{if } i_1(t, x) > i_2(t, x) \quad \wedge \quad i_1(t, x), i_2(t, x) \neq \text{miss} \\ 0 & \text{if } i_1(t, x) \leq i_2(t, x) \quad \wedge \quad i_1(t, x), i_2(t, x) \neq \text{miss} \\ \text{miss} & \text{if } i_1(t, x) = \text{miss} \quad \vee \quad i_2(t, x) = \text{miss} \end{cases}$

Example

To create a mask containing 1 if the elements of two fields are the same and 0 if the elements are different use:

```
cdo eq ifile1 ifile2 ofile
```

2.5.2. COMPC - Comparison of a field with a constant

Synopsis

`<operator>,c ifile ofile`

Description

This module compares all fields of a dataset with a constant. The resulting field is a mask containing 1 if the comparison is true and 0 if not. The type of comparison depends on the chosen operator.

Operators

eqc Equal constant

$$o(t, x) = \begin{cases} 1 & \text{if } i(t, x) = c \quad \wedge \quad i(t, x), c \neq \text{miss} \\ 0 & \text{if } i(t, x) \neq c \quad \wedge \quad i(t, x), c \neq \text{miss} \\ \text{miss} & \text{if } i(t, x) = \text{miss} \quad \vee \quad c = \text{miss} \end{cases}$$

nec Not equal constant

$$o(t, x) = \begin{cases} 1 & \text{if } i(t, x) \neq c \quad \wedge \quad i(t, x), c \neq \text{miss} \\ 0 & \text{if } i(t, x) = c \quad \wedge \quad i(t, x), c \neq \text{miss} \\ \text{miss} & \text{if } i(t, x) = \text{miss} \quad \vee \quad c = \text{miss} \end{cases}$$

lec Less equal constant

$$o(t, x) = \begin{cases} 1 & \text{if } i(t, x) \leq c \quad \wedge \quad i(t, x), c \neq \text{miss} \\ 0 & \text{if } i(t, x) > c \quad \wedge \quad i(t, x), c \neq \text{miss} \\ \text{miss} & \text{if } i(t, x) = \text{miss} \quad \vee \quad c = \text{miss} \end{cases}$$

ltc Less than constant

$$o(t, x) = \begin{cases} 1 & \text{if } i(t, x) < c \quad \wedge \quad i(t, x), c \neq \text{miss} \\ 0 & \text{if } i(t, x) \geq c \quad \wedge \quad i(t, x), c \neq \text{miss} \\ \text{miss} & \text{if } i(t, x) = \text{miss} \quad \vee \quad c = \text{miss} \end{cases}$$

gec Greater equal constant

$$o(t, x) = \begin{cases} 1 & \text{if } i(t, x) \geq c \quad \wedge \quad i(t, x), c \neq \text{miss} \\ 0 & \text{if } i(t, x) < c \quad \wedge \quad i(t, x), c \neq \text{miss} \\ \text{miss} & \text{if } i(t, x) = \text{miss} \quad \vee \quad c = \text{miss} \end{cases}$$

gtc Greater than constant

$$o(t, x) = \begin{cases} 1 & \text{if } i(t, x) > c \quad \wedge \quad i(t, x), c \neq \text{miss} \\ 0 & \text{if } i(t, x) \leq c \quad \wedge \quad i(t, x), c \neq \text{miss} \\ \text{miss} & \text{if } i(t, x) = \text{miss} \quad \vee \quad c = \text{miss} \end{cases}$$

Parameter

c FLOAT Constant

Example

To create a mask containing 1 if the field element is greater than 273.15 and 0 if not use:

```
cdo gtc,273.15 ifile ofile
```

2.6. Modification

This section contains modules to modify the metadata, fields or part of a field in a dataset.

Here is a short overview of all operators in this section:

setpartab	Set parameter table
setcode	Set code number
setparam	Set parameter identifier
setname	Set variable name
setlevel	Set level
setltype	Set GRIB level type
setdate	Set date
settime	Set time of the day
setday	Set day
setmon	Set month
setyear	Set year
settunits	Set time units
settaxis	Set time axis
setreftime	Set reference time
setcalendar	Set calendar
shifttime	Shift time steps
chcode	Change code number
chparam	Change parameter identifier
chname	Change variable name
chlevel	Change level
chlevelc	Change level of one code
chlevelv	Change level of one variable
setgrid	Set grid
setgridtype	Set grid type
setzaxis	Set z-axis
setgatt	Set global attribute
setgatts	Set global attributes
invertlat	Invert latitudes
invertlev	Invert levels
maskregion	Mask regions
masklonlatbox	Mask a longitude/latitude box
maskindexbox	Mask an index box
setclonlatbox	Set a longitude/latitude box to constant
setcindexbox	Set an index box to constant
enlarge	Enlarge fields
setmissval	Set a new missing value
setctomiss	Set constant to missing value
setmisstoc	Set missing value to constant
setrtomiss	Set range to missing value
setvrange	Set valid range

2.6.1. SET - Set field info

Synopsis

```
setpartab,table ifile ofile
setcode,code ifile ofile
setparam,param ifile ofile
setname,name ifile ofile
setlevel,level ifile ofile
setltype,ltype ifile ofile
```

Description

This module sets some field information. Depending on the chosen operator the parameter table, code number, parameter identifier, variable name or level is set.

Operators

setpartab	Set parameter table Sets the parameter table for all variables.
setcode	Set code number Sets the code number for all variables to the same given value.
setparam	Set parameter identifier Sets the parameter identifier of the first variable.
setname	Set variable name Sets the name of the first variable.
setlevel	Set level Sets the first level of all variables.
setltype	Set GRIB level type Sets the GRIB level type of all variables.

Parameter

<i>table</i>	STRING	Parameter table file or name
<i>code</i>	INTEGER	Code number
<i>param</i>	STRING	Parameter identifier (format: code[.tabnum] or num[.cat[.dis]])
<i>name</i>	STRING	Variable name
<i>level</i>	FLOAT	New level
<i>ltype</i>	INTEGER	GRIB level type

Example

To assign the parameter table echam5 to the input dataset use:

```
cdo setpartab,echam5 ifile ofile
```

2.6.2. SETTIME - Set time

Synopsis

```

setdate,date ifile ofile
settime,time ifile ofile
setday,day ifile ofile
setmon,month ifile ofile
setyear,year ifile ofile
settunits,units ifile ofile
settaxis,date,time[,inc] ifile ofile
setreftime,date,time[,units] ifile ofile
setcalendar,calendar ifile ofile
shifttime,sval ifile ofile

```

Description

This module sets the time axis or part of the time axis. Which part of the time axis is overwritten depends on the chosen operator.

Operators

setdate	Set date Sets the date in every time step to the same given value.
settime	Set time of the day Sets the time in every time step to the same given value.
setday	Set day Sets the day in every time step to the same given value.
setmon	Set month Sets the month in every time step to the same given value.
setyear	Set year Sets the year in every time step to the same given value.
settunits	Set time units Sets the base units of a relative time axis.
settaxis	Set time axis Sets the time axis.
setreftime	Set reference time Sets the reference time of a relative time axis.
setcalendar	Set calendar Sets the calendar of a relative time axis.
shifttime	Shift time steps Shifts all time steps by the parameter sval.

Parameter

<i>day</i>	INTEGER	Value of the new day
<i>month</i>	INTEGER	Value of the new month
<i>year</i>	INTEGER	Value of the new year
<i>units</i>	STRING	Base units of the time axis (seconds, minutes, hours, days, months, years)
<i>date</i>	STRING	Date (format: YYYY-MM-DD)
<i>time</i>	STRING	Time (format: hh:mm:ss)
<i>inc</i>	STRING	Optional increment (seconds, minutes, hours, days, months, years) [default: 0hour]
<i>calendar</i>	STRING	Calendar (standard, proleptic, 360days, 365days, 366days)
<i>sval</i>	STRING	Shift value (e.g. -3hour)

Example

To set the time axis to 1987-01-16 12:00:00 with an increment of one month for each time step use:

```
cdo settaxis,1987-01-16,12:00:00,1mon ifile ofile
```

Result of 'cdo showdate ofile' for a dataset with 12 time steps:

```
1987-01-16 1987-02-16 1987-03-16 1987-04-16 1987-05-16 1987-06-16 \
1987-07-16 1987-08-16 1987-09-16 1987-10-16 1987-11-16 1987-12-16
```

To shift this time axis by -15 days use:

```
cdo shifttime,-15days ifile ofile
```

Result of 'cdo showdate ofile':

```
1987-01-01 1987-02-01 1987-03-01 1987-04-01 1987-05-01 1987-06-01 \
1987-07-01 1987-08-01 1987-09-01 1987-10-01 1987-11-01 1987-12-01
```

2.6.3. CHANGE - Change field header

Synopsis

```

chcode,oldcode,newcode[,...] ifile ofile
chparam,oldparam,newparam,... ifile ofile
chname,oldname,newname,... ifile ofile
chlevel,oldlev,newlev,... ifile ofile
chlevelc,code,oldlev,newlev ifile ofile
chlevelv,name,oldlev,newlev ifile ofile

```

Description

This module reads fields from **ifile**, changes some header values and writes the results to **ofile**. The kind of changes depends on the chosen operator.

Operators

chcode	Change code number Changes some user given code numbers to new user given values.
chparam	Change parameter identifier Changes some user given parameter identifiers to new user given values.
chname	Change variable name Changes some user given variable names to new user given names.
chlevel	Change level Changes some user given levels to new user given values.
chlevelc	Change level of one code Changes one level of a user given code number.
chlevelv	Change level of one variable Changes one level of a user given variable name.

Parameter

<i>code</i>	INTEGER	Code number
<i>oldcode</i> , <i>newcode</i> ,...	INTEGER	Pairs of old and new code numbers
<i>oldparam</i> , <i>newparam</i> ,...	STRING	Pairs of old and new parameter identifiers
<i>name</i>	STRING	Variable name
<i>oldname</i> , <i>newname</i> ,...	STRING	Pairs of old and new variable names
<i>oldlev</i>	FLOAT	Old level
<i>newlev</i>	FLOAT	New level
<i>oldlev</i> , <i>newlev</i> ,...	FLOAT	Pairs of old and new levels

Example

To change the code number 98 to 179 and 99 to 211 use:

```
cdo chcode,98,179,99,211 ifile ofile
```


2.6.4. SETGRID - Set grid type

Synopsis

```
setgrid,grid ifile ofile
setgridtype,gridtype ifile ofile
```

Description

This module sets the grid description of all fields with the same grid size as the new grid.

Operators

setgrid	Set grid Sets the grid description of all fields.
setgridtype	Set grid type Sets the grid type of all grids to a user given value.

Parameter

<i>grid</i>	STRING	Target grid description file or name
<i>gridtype</i>	STRING	Target grid type (curvilinear, unstructured or dereference)

Example

Assuming a dataset has fields on a grid with 2048 elements without or with wrong grid description. To set the grid description of all input fields to a Gaussian N32 grid (8192 gridpoints) use:

```
cdo setgrid,n32 ifile ofile
```

2.6.5. SETZAXIS - Set z-axis type

Synopsis

```
setzaxis,zaxis ifile ofile
```

Description

This operator sets the z-axis description of all variables with the same number of level as the new z-axis.

Parameter

<i>zaxis</i>	STRING	Z-axis description file or name of the target z-axis
--------------	--------	--

2.6.6. SETGATT - Set global attribute

Synopsis

```
setgatt,attname,attstring ifile ofile
setgatts,attfile ifile ofile
```

Description

This module sets global text attributes of a dataset. Depending on the chosen operator the attributes are read from a file or can be specified by a parameter.

Operators

setgatt	Set global attribute Sets one user defined global text attribute.
setgatts	Set global attributes Sets user defined global text attributes. The name and text of the global attributes are read from a file.

Parameter

<i>attname,attstring</i>	STRING	Name and text of the global attribute (without spaces!)
<i>attfile</i>	STRING	File name which contains global text attributes

Note

Besides netCDF none of the supported data formats supports global attributes.

Example

To set the global text attribute "myatt" to "myattcontents" in a netCDF file use:

```
cdo setgatt,myatt,myattcontents ifile ofile
```

Result of 'ncdump -h ofile':

```
netcdf ofile {
  dimensions: ...

  variables: ...

  // global attributes:
      :myatt = "myattcontents" ;
}
```

2.6.7. INVERT - Invert latitudes

Synopsis

```
invertlat ifile ofile
```

Description

This operator inverts the latitudes of all fields with a regular lon/lat grid.

Example

To invert the latitudes of a 2D field from N->S to S->N use:

```
cdo invertlat ifile ofile
```

2.6.8. INVERTLEV - Invert levels

Synopsis

```
invertlev ifile ofile
```

Description

This operator inverts the levels of all non hybrid 3D variables.

2.6.9. MASKREGION - Mask regions

Synopsis

```
maskregion,regions ifile ofile
```

Description

Masks different regions of fields with a regular lon/lat grid. The elements inside a region are untouched, the elements outside are set to missing value. All input fields must have the same horizontal grid. The user has to give ASCII formatted files with different regions. A region is defined by a polygon. Each line of a polygon description file contains the longitude and latitude of one point. Each polygon description file can contain one or more polygons separated by a line with the character &.

Parameter

regions STRING Comma separated list of ASCII formatted files with different regions

Example

To mask the region with the longitudes from 120E to 90W and latitudes from 20N to 20S on all input fields use:

```
cdo maskregion,myregion ifile ofile
```

For this example the polygon description file `myregion` should contain the following four coordinates:

```
120  20
120 -20
270 -20
270  20
```

2.6.10. MASKBOX - Mask a box

Synopsis

```
masklonlatbox,lon1,lon2,lat1,lat2 ifile ofile
```

```
maskindexbox,idx1,idx2,idy1,idy2 ifile ofile
```

Description

Masks a box of the rectangular understood field. The elements inside the box are untouched, the elements outside are set to missing value. All input fields need to have the same horizontal grid. Use [sellonlatbox](#) or [selindexbox](#) if only the data inside the box are needed.

Operators

masklonlatbox	Mask a longitude/latitude box Masks a longitude/latitude box. The user has to give the longitudes and latitudes of the edges of the box.
maskindexbox	Mask an index box Masks an index box. The user has to give the indexes of the edges of the box. The index of the left edge can be greater then the one of the right edge.

Parameter

<i>lon1</i>	FLOAT	Western longitude
<i>lon2</i>	FLOAT	Eastern longitude
<i>lat1</i>	FLOAT	Southern or northern latitude
<i>lat2</i>	FLOAT	Northern or southern latitude
<i>idx1</i>	INTEGER	Index of first longitude
<i>idx2</i>	INTEGER	Index of last longitude
<i>idy1</i>	INTEGER	Index of first latitude
<i>idy2</i>	INTEGER	Index of last latitude

Example

To mask the region with the longitudes from 120E to 90W and latitudes from 20N to 20S on all input fields use:

```
cdo masklonlatbox,120,-90,20,-20 ifile ofile
```

If the input dataset has fields on a Gaussian N16 grid, the same box can be masked with [maskindexbox](#) by:

```
cdo maskindexbox,23,48,13,20 ifile ofile
```

2.6.11. SETBOX - Set a box to constant

Synopsis

```
setclonlatbox,c,lon1,lon2,lat1,lat2 ifile ofile
```

```
setcindexbox,c,idx1,idx2,idy1,idy2 ifile ofile
```

Description

Sets a box of the rectangular understood field to a constant value. The elements outside the box are untouched, the elements inside are set to the given constant. All input fields need to have the same horizontal grid.

Operators

setclonlatbox	Set a longitude/latitude box to constant Sets the values of a longitude/latitude box to a constant value. The user has to give the longitudes and latitudes of the edges of the box.
setcindexbox	Set an index box to constant Sets the values of an index box to a constant value. The user has to give the indexes of the edges of the box. The index of the left edge can be greater than the one of the right edge.

Parameter

<i>c</i>	FLOAT	Constant
<i>lon1</i>	FLOAT	Western longitude
<i>lon2</i>	FLOAT	Eastern longitude
<i>lat1</i>	FLOAT	Southern or northern latitude
<i>lat2</i>	FLOAT	Northern or southern latitude
<i>idx1</i>	INTEGER	Index of first longitude
<i>idx2</i>	INTEGER	Index of last longitude
<i>idy1</i>	INTEGER	Index of first latitude
<i>idy2</i>	INTEGER	Index of last latitude

Example

To set all values in the region with the longitudes from 120E to 90W and latitudes from 20N to 20S to the constant value -1.23 use:

```
cdo setclonlatbox,-1.23,120,-90,20,-20 ifile ofile
```

If the input dataset has fields on a Gaussian N16 grid, the same box can be set with [setcindexbox](#) by:

```
cdo setcindexbox,-1.23,23,48,13,20 ifile ofile
```

2.6.12. ENLARGE - Enlarge fields

Synopsis

```
enlarge,grid ifile ofile
```

Description

Enlarge all fields of `ifile` to a user given grid. Normally only the last field element is used for the enlargement. If however the input and output grid are regular lon/lat grids, a zonal or meridional enlargement is possible. Zonal enlargement takes place, if the xsize of the input field is 1 and the ysize of both grids are the same. For meridional enlargement the ysize have to be 1 and the xsize of both grids should have the same size.

Parameter

grid STRING Target grid description file or name

Example

Assumed you want to add two datasets. The first dataset is a field on a global grid (n field elements) and the second dataset is a global mean (1 field element). Before you can add these two datasets the second dataset have to be enlarged to the grid size of the first dataset:

```
cdo enlarge,ifile1 ifile2 tmpfile
cdo add ifile1 tmpfile ofile
```

Or shorter using operator piping:

```
cdo add ifile1 -enlarge,ifile1 ifile2 ofile
```

2.6.13. SETMISS - Set missing value

Synopsis

```
setmissval,newmiss ifile ofile

setctomiss,c ifile ofile

setmisstoc,c ifile ofile

setrtomiss,rmin,rmax ifile ofile

setvrangle,rmin,rmax ifile ofile
```

Description

This module sets part of a field to missing value or missing values to a constant value. Which part of the field is set depends on the chosen operator.

Operators

setmissval	Set a new missing value
	$o(t, x) = \begin{cases} \text{newmiss} & \text{if } i(t, x) = \text{miss} \\ i(t, x) & \text{if } i(t, x) \neq \text{miss} \end{cases}$
setctomiss	Set constant to missing value
	$o(t, x) = \begin{cases} \text{miss} & \text{if } i(t, x) = c \\ i(t, x) & \text{if } i(t, x) \neq c \end{cases}$
setmisstoc	Set missing value to constant
	$o(t, x) = \begin{cases} c & \text{if } i(t, x) = \text{miss} \\ i(t, x) & \text{if } i(t, x) \neq \text{miss} \end{cases}$
setrtomiss	Set range to missing value
	$o(t, x) = \begin{cases} \text{miss} & \text{if } i(t, x) \geq rmin \wedge i(t, x) \leq rmax \\ i(t, x) & \text{if } i(t, x) < rmin \vee i(t, x) > rmax \end{cases}$
setvrangle	Set valid range
	$o(t, x) = \begin{cases} \text{miss} & \text{if } i(t, x) < rmin \vee i(t, x) > rmax \\ i(t, x) & \text{if } i(t, x) \geq rmin \wedge i(t, x) \leq rmax \end{cases}$

Parameter

<i>newmiss</i>	FLOAT	New missing value
<i>c</i>	FLOAT	Constant
<i>rmin</i>	FLOAT	Lower bound
<i>rmax</i>	FLOAT	Upper bound

Example

Assume an input dataset has one field with temperatures in the range from 246 to 304 Kelvin. To set all values below 273.15 Kelvin to missing value use:

```
cdo setrtomiss,0,273.15 ifile ofile
```

Result of 'cdo info ifile':

-1 :	Date	Time	Code	Level	Size	Miss :	Minimum	Mean	Maximum
1 :	1987-12-31	12:00:00	139	0	2048	0 :	246.27	276.75	303.71

Result of 'cdo info ofile':

-1 :	Date	Time	Code	Level	Size	Miss :	Minimum	Mean	Maximum
1 :	1987-12-31	12:00:00	139	0	2048	871 :	273.16	287.08	303.71

2.7. Arithmetic

This section contains modules to arithmetically process datasets.

Here is a short overview of all operators in this section:

expr	Evaluate expressions
exprf	Evaluate expressions from script file
abs	Absolute value
int	Integer value
nint	Nearest integer value
pow	Power
sqr	Square
sqrt	Square root
exp	Exponential
ln	Natural logarithm
log10	Base 10 logarithm
sin	Sine
cos	Cosine
tan	Tangent
asin	Arc sine
acos	Arc cosine
reci	Reciprocal value
addc	Add a constant
subc	Subtract a constant
mulc	Multiply with a constant
divc	Divide by a constant
add	Add two fields
sub	Subtract two fields
mul	Multiply two fields
div	Divide two fields
min	Minimum of two fields
max	Maximum of two fields
atan2	Arc tangent of two fields
monadd	Add monthly time series
monsub	Subtract monthly time series
monmul	Multiply monthly time series
monddiv	Divide monthly time series
ymonadd	Add multi-year monthly time series
ymonsub	Subtract multi-year monthly time series
ymonmul	Multiply multi-year monthly time series
ymonddiv	Divide multi-year monthly time series
ydayadd	Add multi-year daily time series
ydaysub	Subtract multi-year daily time series
ydaymul	Multiply multi-year daily time series
ydaydiv	Divide multi-year daily time series
muldpm	Multiply with days per month
divdpm	Divide by days per month
muldpy	Multiply with days per year
divdpy	Divide by days per year

2.7.1. EXPR - Evaluate expressions

Synopsis

expr,*instr* *ifile* *ofile*

exprf,*filename* *ifile* *ofile*

Description

This module arithmetically processes every time step of the input dataset. Each individual assignment statement have to end with a semi-colon. The basic arithmetic operations addition +, subtraction −, multiplication *, division / and exponentiation ^ can be used. The following intrinsic functions are available:

abs (x)	Absolute value of x
int (x)	Integer value of x
nint (x)	Nearest integer value of x
sqr (x)	Square of x
sqrt (x)	Square Root of x
exp (x)	Exponential of x
log (x)	Natural logarithm of x
log10 (x)	Base 10 logarithm of x
sin (x)	Sine of x, where x is specified in radians
cos (x)	Cosine of x, where x is specified in radians
tan (x)	Tangent of x, where x is specified in radians
asin (x)	Arc-sine of x, where x is specified in radians
acos (x)	Arc-cosine of x, where x is specified in radians
atan (x)	Arc-tangent of x, where x is specified in radians

Operators

expr	Evaluate expressions The processing instructions are read from the parameter.
exprf	Evaluate expressions from script file Contrary to expr the processing instructions are read from a file.

Parameter

<i>instr</i>	STRING	Processing instructions (without spaces!)
<i>filename</i>	STRING	File with processing instructions

Example

Assume an input dataset contains at least the variables 'aprl', 'aprc' and 'ts'. To create a new variable 'var1' with the sum of 'aprl' and 'aprc' and a variable 'var2' which convert the temperature 'ts' from Kelvin to Celsius use:

```
cdo expr,'var1=aprl+aprc;var2=ts-273.15;' ifile ofile
```

The same example, but the instructions are read from a file:

```
cdo exprf,myexpr ifile ofile
```

The file `myexpr` contains:

```
var1 = aprl + aprc;  
var2 = ts - 273.15;
```

2.7.2. MATH - Mathematical functions

Synopsis

`<operator> ifile ofile`

Description

This module contains some standard mathematical functions. All trigonometric functions calculate with radians.

Operators

abs	Absolute value $o(t, x) = \text{abs}(i(t, x))$
int	Integer value $o(t, x) = \text{int}(i(t, x))$
nint	Nearest integer value $o(t, x) = \text{nint}(i(t, x))$
pow	Power $o(t, x) = i(t, x)^y$
sqr	Square $o(t, x) = i(t, x)^2$
sqrt	Square root $o(t, x) = \sqrt{i(t, x)}$
exp	Exponential $o(t, x) = e^{i(t, x)}$
ln	Natural logarithm $o(t, x) = \ln(i(t, x))$
log10	Base 10 logarithm $o(t, x) = \log_{10}(i(t, x))$
sin	Sine $o(t, x) = \sin(i(t, x))$
cos	Cosine $o(t, x) = \cos(i(t, x))$
tan	Tangent $o(t, x) = \tan(i(t, x))$
asin	Arc sine $o(t, x) = \arcsin(i(t, x))$
acos	Arc cosine $o(t, x) = \arccos(i(t, x))$
reci	Reciprocal value $o(t, x) = 1/i(t, x)$

Example

To calculate the square root for all field elements use:

```
cdo sqrt ifile ofile
```

2.7.3. ARITHC - Arithmetic with a constant

Synopsis

```
<operator>,c ifile ofile
```

Description

This module performs simple arithmetic with all field elements of a dataset and a constant. The fields in `ofile` inherit the meta data from `ifile`.

Operators

addc	Add a constant $o(t, x) = i(t, x) + c$
subc	Subtract a constant $o(t, x) = i(t, x) - c$
mulc	Multiply with a constant $o(t, x) = i(t, x) * c$
divc	Divide by a constant $o(t, x) = i(t, x) / c$

Parameter

<code>c</code>	FLOAT	Constant
----------------	-------	----------

Example

To sum all input fields with the constant -273.15 use:

```
cdo addc,-273.15 ifile ofile
```

2.7.4. ARITH - Arithmetic on two datasets

Synopsis

`<operator> ifile1 ifile2 ofile`

Description

This module performs simple arithmetic of two datasets. The number of fields in `ifile1` should be the same as in `ifile2`. One of the input files can contain only one time step or one field. The fields in `ofile` inherit the meta data from `ifile1` or `ifile2`.

Operators

add	Add two fields $o(t, x) = i_1(t, x) + i_2(t, x)$
sub	Subtract two fields $o(t, x) = i_1(t, x) - i_2(t, x)$
mul	Multiply two fields $o(t, x) = i_1(t, x) * i_2(t, x)$
div	Divide two fields $o(t, x) = i_1(t, x) / i_2(t, x)$
min	Minimum of two fields $o(t, x) = \min(i_1(t, x), i_2(t, x))$
max	Maximum of two fields $o(t, x) = \max(i_1(t, x), i_2(t, x))$
atan2	Arc tangent of two fields The <i>atan2</i> operator calculates the arc tangent of two fields. The result is in radians, which is between -PI and PI (inclusive). $o(t, x) = \text{atan2}(i_1(t, x), i_2(t, x))$

Example

To sum all fields of the first input file with the corresponding fields of the second input file use:

```
cdo add ifile1 ifile2 ofile
```

2.7.5. MONARITH - Monthly arithmetic

Synopsis

```
<operator> ifile1 ifile2 ofile
```

Description

This module performs simple arithmetic of a time series and one time step with the same month and year. For each field in `ifile1` the corresponding field of the time step in `ifile2` with the same month and year is used. The header information in `ifile1` have to be the same as in `ifile2`. Usually `ifile2` is generated by an operator of the module [MONSTAT](#).

Operators

monadd	Add monthly time series Adds a time series and a monthly time series.
monsub	Subtract monthly time series Subtracts a time series and a monthly time series.
monmul	Multiply monthly time series Multiplies a time series and a monthly time series.
monddiv	Divide monthly time series Divides a time series and a monthly time series.

Example

To subtract a monthly time average from a time series use:

```
cdo monsub ifile -monavg ifile ofile
```


2.7.6. YMONARITH - Multi-year monthly arithmetic

Synopsis

```
<operator> ifile1 ifile2 ofile
```

Description

This module performs simple arithmetic of a time series and one time step with the same month of year. For each field in `ifile1` the corresponding field of the time step in `ifile2` with the same month of year is used. The header information in `ifile1` have to be the same as in `ifile2`. Usually `ifile2` is generated by an operator of the module [YMONSTAT](#).

Operators

ymonadd	Add multi-year monthly time series Adds a time series and a multi-year monthly time series.
ymonsub	Subtract multi-year monthly time series Subtracts a time series and a multi-year monthly time series.
ymonmul	Multiply multi-year monthly time series Multiplies a time series and a multi-year monthly time series.
ymonddiv	Divide multi-year monthly time series Divides a time series and a multi-year monthly time series.

Example

To subtract a multi-year monthly time average from a time series use:

```
cdo ymonsub ifile -ymonavg ifile ofile
```

2.7.7. YDAYARITH - Multi-year daily arithmetic

Synopsis

```
<operator> ifile1 ifile2 ofile
```

Description

This module performs simple arithmetic of a time series and one time step with the same day of year. For each field in `ifile1` the corresponding field of the time step in `ifile2` with the same day of year is used. The header information in `ifile1` have to be the same as in `ifile2`. Usually `ifile2` is generated by an operator of the module [YDAYSTAT](#).

Operators

ydayadd	Add multi-year daily time series Adds a time series and a multi-year daily time series.
ydaysub	Subtract multi-year daily time series Subtracts a time series and a multi-year daily time series.
ydaymul	Multiply multi-year daily time series Multiplies a time series and a multi-year daily time series.
ydaydiv	Divide multi-year daily time series Divides a time series and a multi-year daily time series.

Example

To subtract a multi-year daily time average from a time series use:

```
cdo ydaysub ifile -ydayavg ifile ofile
```

2.7.8. ARITHDAYS - Arithmetic with days

Synopsis

`<operator> ifile ofile`

Description

This module multiplies or divides each time step of a dataset with the corresponding days per month or days per year. The result of these functions depends on the used calendar of the input data.

Operators

muldpm	Multiply with days per month $o(t, x) = i(t, x) * days_per_month$
divdpm	Divide by days per month $o(t, x) = i(t, x) / days_per_month$
muldpy	Multiply with days per year $o(t, x) = i(t, x) * days_per_year$
divdpy	Divide by days per year $o(t, x) = i(t, x) / days_per_year$

Example

Assume an input dataset is a monthly mean time series. To compute the yearly mean from the correct weighted monthly mean use:

```
cdo muldpm ifile tmpfile1
cdo yearsum tmpfile1 tmpfile2
cdo divdpy tmpfile2 ofile
```

Or all in one command line:

```
cdo divdpy -yearsum -muldpm ifile ofile
```

2.8. Statistical values

This section contains modules to compute statistical values of datasets. In this program there is the different notion of "mean" and "average" to distinguish two different kinds of treatment of missing values. While computing the mean, only the not missing values are considered to belong to the sample with the side effect of a probably reduced sample size. Computing the average is just adding the sample members and divide the result by the sample size. For example, the mean of 1, 2, miss and 3 is $(1+2+3)/3 = 2$, whereas the average is $(1+2+miss+3)/4 = miss/4 = miss$. If there are no missing values in the sample, the average and the mean are identical.

In this section the abbreviations as in the following table are used:

sum	$\sum_{i=1}^n x_i$
mean resp. avg	$n^{-1} \sum_{i=1}^n x_i$
mean resp. avg weighted by $\{w_i, i = 1, \dots, n\}$	$\left(\sum_{j=1}^n w_j \right)^{-1} \sum_{i=1}^n w_i x_i$
Variance var	$n^{-1} \sum_{i=1}^n (x_i - \bar{x})^2$
var weighted by $\{w_i, i = 1, \dots, n\}$	$\left(\sum_{j=1}^n w_j \right)^{-1} \sum_{i=1}^n w_i \left(x_i - \left(\sum_{j=1}^n w_j \right)^{-1} \sum_{j=1}^n w_j x_j \right)^2$
Standard deviation std	$\sqrt{n^{-1} \sum_{i=1}^n (x_i - \bar{x})^2}$
std weighted by $\{w_i, i = 1, \dots, n\}$	$\sqrt{\left(\sum_{j=1}^n w_j \right)^{-1} \sum_{i=1}^n w_i \left(x_i - \left(\sum_{j=1}^n w_j \right)^{-1} \sum_{j=1}^n w_j x_j \right)^2}$
Cumulative Ranked Probability Score crps	$\int_{-\infty}^{\infty} [H(x_1) - cdf(\{x_2 \dots x_n\}) _r]^2 dr$
with $cdf(X) _r$ being the cumulative distribution function of $\{x_i, i = 2 \dots n\}$ at r and $H(x)$ the Heavyside function jumping at x .	

Here is a short overview of all operators in this section:

consecsum	Consecutive Sum
consects	Consecutive Timesteps

ensmin	Ensemble minimum
ensmax	Ensemble maximum
enssum	Ensemble sum
ensmean	Ensemble mean
ensavg	Ensemble average
ensvar	Ensemble variance
ensstd	Ensemble standard deviation
enspctl	Ensemble percentiles
ensbrs	Brier score
enscrps	Cumulative Ranked Probability score
ensrkhistspace	Ranked Histogram averaged over time
ensrkhisttime	Ranked Histogram averaged over space
ensroc	Ensemble Receiver Operating characteristics
fldmin	Field minimum
fldmax	Field maximum
fldsum	Field sum
fldmean	Field mean
fldavg	Field average
fldvar	Field variance
fldstd	Field standard deviation
fldpctl	Field percentiles
zonmin	Zonal minimum
zonmax	Zonal maximum
zonsum	Zonal sum
zonmean	Zonal mean
zonavg	Zonal average
zonvar	Zonal variance
zonstd	Zonal standard deviation
zonpctl	Zonal percentiles
mermin	Meridional minimum
mermax	Meridional maximum
mersum	Meridional sum
mermean	Meridional mean
meravg	Meridional average
mervar	Meridional variance
merstd	Meridional standard deviation
merpctl	Meridional percentiles
gridboxmin	Gridbox minimum
gridboxmax	Gridbox maximum
gridboxsum	Gridbox sum
gridboxmean	Gridbox mean
gridboxavg	Gridbox average
gridboxvar	Gridbox variance
gridboxstd	Gridbox standard deviation

vertmin	Vertical minimum
vertmax	Vertical maximum
vertsum	Vertical sum
vertmean	Vertical mean
vertavg	Vertical average
vertvar	Vertical variance
vertstd	Vertical standard deviation
timselmin	Time range minimum
timselmax	Time range maximum
timselsum	Time range sum
timselmean	Time range mean
timselavg	Time range average
timselvar	Time range variance
timselstd	Time range standard deviation
timselfctl	Time range percentiles
runmin	Running minimum
runmax	Running maximum
runsum	Running sum
runmean	Running mean
runavg	Running average
runvar	Running variance
runstd	Running standard deviation
runpctl	Running percentiles
timmin	Time minimum
timmax	Time maximum
timsum	Time sum
timmean	Time mean
timavg	Time average
timvar	Time variance
timstd	Time standard deviation
timpctl	Time percentiles
hourmin	Hourly minimum
hourmax	Hourly maximum
hoursum	Hourly sum
hourmean	Hourly mean
houravg	Hourly average
hourvar	Hourly variance
hourstd	Hourly standard deviation
hourpctl	Hourly percentiles
daymin	Daily minimum
daymax	Daily maximum
daysum	Daily sum
daymean	Daily mean
dayavg	Daily average
dayvar	Daily variance
daystd	Daily standard deviation

daypctl	Daily percentiles
monmin	Monthly minimum
monmax	Monthly maximum
monsum	Monthly sum
monmean	Monthly mean
monavg	Monthly average
monvar	Monthly variance
monstd	Monthly standard deviation
monpctl	Monthly percentiles
yearmin	Yearly minimum
yearmax	Yearly maximum
yearsum	Yearly sum
yearmean	Yearly mean
yearavg	Yearly average
yearvar	Yearly variance
yearstd	Yearly standard deviation
yearpctl	Yearly percentiles
seasmin	Seasonal minimum
seasmax	Seasonal maximum
seassum	Seasonal sum
seasmean	Seasonal mean
seasavg	Seasonal average
seasvar	Seasonal variance
seasstd	Seasonal standard deviation
seaspctl	Seasonal percentiles
yhourmin	Multi-year hourly minimum
yhourmax	Multi-year hourly maximum
yhoursum	Multi-year hourly sum
yhourmean	Multi-year hourly mean
yhouravg	Multi-year hourly average
yhourvar	Multi-year hourly variance
yhourstd	Multi-year hourly standard deviation
ydaymin	Multi-year daily minimum
ydaymax	Multi-year daily maximum
ydaysum	Multi-year daily sum
ydaymean	Multi-year daily mean
ydayavg	Multi-year daily average
ydayvar	Multi-year daily variance
ydaystd	Multi-year daily standard deviation
ydaypctl	Multi-year daily percentiles
ymonmin	Multi-year monthly minimum
ymonmax	Multi-year monthly maximum
ymonsum	Multi-year monthly sum
ymonmean	Multi-year monthly mean
ymonavg	Multi-year monthly average
ymonvar	Multi-year monthly variance
ymonstd	Multi-year monthly standard deviation

ymonpctl	Multi-year monthly percentiles
yseasmin	Multi-year seasonal minimum
yseasmax	Multi-year seasonal maximum
yseassum	Multi-year seasonal sum
yseasmean	Multi-year seasonal mean
yseasavg	Multi-year seasonal average
yseasvar	Multi-year seasonal variance
yseasstd	Multi-year seasonal standard deviation
yseaspctl	Multi-year seasonal percentiles
ydrunmin	Multi-year daily running minimum
ydrunmax	Multi-year daily running maximum
ydrunsum	Multi-year daily running sum
ydrunmean	Multi-year daily running mean
ydrunavg	Multi-year daily running average
ydrunvar	Multi-year daily running variance
ydrunstd	Multi-year daily running standard deviation
ydrunpctl	Multi-year daily running percentiles

2.8.1. CONSECSTAT - Consecutive timestep periods

Synopsis

```
<operator> ifile ofile
```

Description

This module computes periods over all time steps in `ifile` where a certain property is valid. The property can be chosen by creating a mask from the original data, which is the expected input format for operators of this module. Depending on the operator full information about each period or just its length and ending date are computed.

Operators

consecsum	<p>Consecutive Sum</p> <p>This operator computes periods of consecutive timesteps similar to a runsum, but periods are finished, when the mask value is 0. That way multiple periods can be found. Timesteps from the input are preserved. Missing values are handled like 0, i.e. finish periods of consecutive timesteps.</p>
consects	<p>Consecutive Timesteps</p> <p>In contrast to the operator above <code>consects</code> only computes the length of each period together with its last timestep. To be able to perform statistical analysis like min, max or mean, everything else is set to <code>misvall</code>.</p>

Example

For a given time series of daily temperatures, the periods of summer days can be calculated with inplace masking the input field:

```
cdo consects -gtc,20.0 ifile1 ofile
```

2.8.2. ENSSTAT - Statistical values over an ensemble

Synopsis

```

ensmin ifiles ofile
ensmax ifiles ofile
enssum ifiles ofile
ensmean ifiles ofile
ensavg ifiles ofile
ensvar ifiles ofile
ensstd ifiles ofile
enspctl,p ifiles ofile

```

Description

This module computes statistical values over an ensemble of input files. Depending on the chosen operator the minimum, maximum, sum, average, variance, standard deviation, a certain percentile over all input files or a skill score is written to `ofile`. All input files need to have the same structure with the same variables. The date information of a time step in `ofile` is the date of the first input file.

Operators

ensmin	Ensemble minimum $o(t, x) = \mathbf{min}\{i_1(t, x), i_2(t, x), \dots, i_n(t, x)\}$
ensmax	Ensemble maximum $o(t, x) = \mathbf{max}\{i_1(t, x), i_2(t, x), \dots, i_n(t, x)\}$
enssum	Ensemble sum $o(t, x) = \mathbf{sum}\{i_1(t, x), i_2(t, x), \dots, i_n(t, x)\}$
ensmean	Ensemble mean $o(t, x) = \mathbf{mean}\{i_1(t, x), i_2(t, x), \dots, i_n(t, x)\}$
ensavg	Ensemble average $o(t, x) = \mathbf{avg}\{i_1(t, x), i_2(t, x), \dots, i_n(t, x)\}$
ensvar	Ensemble variance $o(t, x) = \mathbf{var}\{i_1(t, x), i_2(t, x), \dots, i_n(t, x)\}$
ensstd	Ensemble standard deviation $o(t, x) = \mathbf{std}\{i_1(t, x), i_2(t, x), \dots, i_n(t, x)\}$
enspctl	Ensemble percentiles $o(t, x) = \mathbf{pth\ percentile}\{i_1(t, x), i_2(t, x), \dots, i_n(t, x)\}$

Parameter

`p` FLOAT Percentile number in 0, ..., 100

Example

To compute the ensemble mean over 6 input files use:

```
cdo ensmean ifile1 ifile2 ifile3 ifile4 ifile5 ifile6 ofile
```

Or shorter with filename substitution:

```
cdo ensmean ifile[1-6] ofile
```

To compute the 50th percentile (median) over 6 input files use:

```
cdo enspctl,50 ifile1 ifile2 ifile3 ifile4 ifile5 ifile6 ofile
```

2.8.3. ENSSTAT2 - Statistical values over an ensemble

Synopsis

```
<operator> obsfile ensfiles ofile
```

Description

This module computes statistical values over the ensemble of **ensfiles** using **obsfile** as a reference. Depending on the chosen operator the Brier score, Cumulative ranked probability score ranked Histogram or a roc-curve over all Ensembles **ensfiles** with reference to **obsfile** is written to **ofile**. The date and grid information of a time step in **ofile** is the date of the first input file. Thus all input files are required to have the same structure in terms of the gridsize, variable definitions and number of time steps.

All Operators in this module use **obsfile** as the reference (for instance an observation) whereas **ensfiles** are understood as an ensemble consisting of n (where n is the number of **ensfiles**) members. For the Brier score it is assumed, that both **obsfile** and **ensfiles** contain probability information. Usually in a way that **obsfile** is a mask indicating the occurrence of an event and **ensfiles** are forecast probabilities of the occurrence of the event. Please also note below, that the 'Brier Score' is actually defined as half the score which was originally defined by Brier. This is common practice for reasons of normalization.

The cumulative ranked probability score is understood as the integral of the squared difference between the cumulative distribution function $\text{cdf}(\text{ensfiles}(t,x))$ of the ensemble and a heavyside function $H(\text{obsfile}(t,x))$.

The operators **ensrkhistspace** and **ensrkhisttime** compute Ranked Histograms. Therefor the vertical axis is utilized as the Histogram axis, which prohibits the use of files containing more than one level. The histogram axis has $\text{nensfiles}+1$ bins with level 0 containing for each grid point the number of observations being smaller as all ensembles and level $\text{nensfiles}+1$ indicating the number of observations being larger than all ensembles.

ensrkhistspace computes a ranked histogram at each time step reducing each horizontal grid to a 1×1 grid and keeping the time axis as in **obsfile**. Contrary **ensrkhistspace** computes a histogram at each grid point keeping the horizontal grid for each variable and reducing the time-axis. The time information is that from the last time step in **obsfile**.

Operators

ensbrs	Brier score $o(t, x) = \sum_{j=2}^n (i_j(t, x) - i_1(t, x))^2$
enscrps	Cumulative Ranked Probability score $o(t, x) = \text{crps}(\{i_1(t, x)\}, \{i_2(t, x), \dots, i_n(t, x)\})$
ensrkhistspace	Ranked Histogram averaged over time
ensrkhisttime	Ranked Histogram averaged over space
ensroc	Ensemble Receiver Operating characteristics

Example

To compute the Brier score over 5 input files `ensfile1-ensfile5` given an observation in `obsfile` use:

```
cdo ensbrs obsfile ensfile1 ensfile2 ensfile3 ensfile4 ensfile5 ofile
```

Or shorter with filename substitution:

```
cdo ensbrs obsfile ensfile[1-5] ofile
```

2.8.4. FLDSTAT - Statistical values over a field

Synopsis

```
fldmin ifile ofile
fldmax ifile ofile
fldsum ifile ofile
fldmean ifile ofile
fldavg ifile ofile
fldvar ifile ofile
fldstd ifile ofile
fldpctl,p ifile ofile
```

Description

This module computes statistical values of the input fields. According to the chosen operator the field minimum, maximum, sum, average, variance, standard deviation or a certain percentile is written to ofile.

Operators

fldmin	Field minimum For every gridpoint x_1, \dots, x_n of the same field it is: $o(t, 1) = \mathbf{min}\{i(t, x'), x_1 < x' \leq x_n\}$
fldmax	Field maximum For every gridpoint x_1, \dots, x_n of the same field it is: $o(t, 1) = \mathbf{max}\{i(t, x'), x_1 < x' \leq x_n\}$
fldsum	Field sum For every gridpoint x_1, \dots, x_n of the same field it is: $o(t, 1) = \mathbf{sum}\{i(t, x'), x_1 < x' \leq x_n\}$
fldmean	Field mean For every gridpoint x_1, \dots, x_n of the same field it is: $o(t, 1) = \mathbf{mean}\{i(t, x'), x_1 < x' \leq x_n\}$ weighted by area weights obtained by the input field.
fldavg	Field average For every gridpoint x_1, \dots, x_n of the same field it is: $o(t, 1) = \mathbf{avg}\{i(t, x'), x_1 < x' \leq x_n\}$ weighted by area weights obtained by the input field.
fldvar	Field variance For every gridpoint x_1, \dots, x_n of the same field it is: $o(t, 1) = \mathbf{var}\{i(t, x'), x_1 < x' \leq x_n\}$ weighted by area weights obtained by the input field.
fldstd	Field standard deviation For every gridpoint x_1, \dots, x_n of the same field it is: $o(t, 1) = \mathbf{std}\{i(t, x'), x_1 < x' \leq x_n\}$ weighted by area weights obtained by the input field.
fldpctl	Field percentiles For every gridpoint x_1, \dots, x_n of the same field it is: $o(t, 1) = \mathbf{pth\ percentile}\{i(t, x'), x_1 < x' \leq x_n\}$

Parameter

p FLOAT Percentile number in 0, ..., 100

Example

To compute the field mean of all input fields use:

```
cdo fldmean ifile ofile
```

To compute the 90th percentile of all input fields use:

```
cdo fldpctl,90 ifile ofile
```

2.8.5. ZONSTAT - Zonal statistical values

Synopsis

```

zonmin ifile ofile
zonmax ifile ofile
zonsum ifile ofile
zonmean ifile ofile
zonavg ifile ofile
zonvar ifile ofile
zonstd ifile ofile
zonpctl,p ifile ofile

```

Description

This module computes zonal statistical values of the input fields. According to the chosen operator the zonal minimum, maximum, sum, average, variance, standard deviation or a certain percentile is written to `ofile`. All input fields need to have the same regular lonlat grid.

Operators

zonmin	Zonal minimum For every latitude the minimum over all longitudes is computed.
zonmax	Zonal maximum For every latitude the maximum over all longitudes is computed.
zonsum	Zonal sum For every latitude the sum over all longitudes is computed.
zonmean	Zonal mean For every latitude the mean over all longitudes is computed.
zonavg	Zonal average For every latitude the average over all longitudes is computed.
zonvar	Zonal variance For every latitude the variance over all longitudes is computed.
zonstd	Zonal standard deviation For every latitude the standard deviation over all longitudes is computed.
zonpctl	Zonal percentiles For every latitude the <i>p</i> th percentile over all longitudes is computed.

Parameter

<i>p</i>	FLOAT	Percentile number in 0, ..., 100
----------	-------	----------------------------------

Example

To compute the zonal mean of all input fields use:

```
cdo zonmean ifile ofile
```

To compute the 50th meridional percentile (median) of all input fields use:

```
cdo zonpctl,50 ifile ofile
```

2.8.6. MERSTAT - Meridional statistical values

Synopsis

```

mermin ifile ofile
mermax ifile ofile
mersum ifile ofile
mermean ifile ofile
meravg ifile ofile
mervar ifile ofile
merstd ifile ofile
merpctl,p ifile ofile

```

Description

This module computes meridional statistical values of the input fields. According to the chosen operator the meridional minimum, maximum, sum, average, variance, standard deviation or a certain percentile is written to `ofile`. All input fields need to have the same regular lon/lat grid.

Operators

mermin	Meridional minimum For every longitude the minimum over all latitudes is computed.
mermax	Meridional maximum For every longitude the maximum over all latitudes is computed.
mersum	Meridional sum For every longitude the sum over all latitudes is computed.
mermean	Meridional mean For every longitude the area weighted mean over all latitudes is computed.
meravg	Meridional average For every longitude the area weighted average over all latitudes is computed.
mervar	Meridional variance For every longitude the variance over all latitudes is computed.
merstd	Meridional standard deviation For every longitude the standard deviation over all latitudes is computed.
merpctl	Meridional percentiles For every longitude the <i>p</i> th percentile over all latitudes is computed.

Parameter

<i>p</i>	FLOAT	Percentile number in 0, ..., 100
----------	-------	----------------------------------

Example

To compute the meridional mean of all input fields use:

```
cdo mermean ifile ofile
```

To compute the 50th meridional percentile (median) of all input fields use:

```
cdo merpctl,50 ifile ofile
```

2.8.7. GRIDBOXSTAT - Statistical values over grid boxes

Synopsis

```
<operator> ,nx,,ny ifile ofile
```

Description

This module computes statistical values over surrounding grid boxes. According to the chosen operator the minimum, maximum, sum, average, variance, or standard deviation of the neighboring grid boxes is written to `ofile`. All gridbox operators only works on quadrilateral curvilinear grids.

Operators

gridboxmin	Gridbox minimum
gridboxmax	Gridbox maximum
gridboxsum	Gridbox sum
gridboxmean	Gridbox mean
gridboxavg	Gridbox average
gridboxvar	Gridbox variance
gridboxstd	Gridbox standard deviation

Parameter

<i>nx</i>	INTEGER	Number of grid boxes in x direction
<i>ny</i>	INTEGER	Number of grid boxes in y direction

Example

To compute the mean over 10x10 grid boxes of the input field use:

```
cdo gridboxmean,10,10 ifile ofile
```

2.8.8. VERTSTAT - Vertical statistical values

Synopsis

```
<operator> ifile ofile
```

Description

This module computes statistical values over all levels of the input variables. According to chosen operator the vertical minimum, maximum, sum, average, variance or standard deviation is written to ofile.

Operators

vertmin	Vertical minimum For every gridpoint the minimum over all levels is computed.
vertmax	Vertical maximum For every gridpoint the maximum over all levels is computed.
vertsum	Vertical sum For every gridpoint the sum over all levels is computed.
vertmean	Vertical mean For every gridpoint the mean over all levels is computed.
vertavg	Vertical average For every gridpoint the average over all levels is computed.
vertvar	Vertical variance For every gridpoint the variance over all levels is computed.
vertstd	Vertical standard deviation For every gridpoint the standard deviation over all levels is computed.

Example

To compute the vertical sum of all input variables use:

```
cdo vertsum ifile ofile
```

2.8.9. TIMSELSTAT - Time range statistical values

Synopsis

```
<operator>,nsets[,noffset[,nskip]] ifile ofile
```

Description

This module computes statistical values for a selected number of time steps. According to the chosen operator the minimum, maximum, sum, average, variance or standard deviation of the selected time steps is written to `ofile`. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`.

Operators

timselmin	Time range minimum For every adjacent sequence t_1, \dots, t_n of time steps of the same selected time range it is: $o(t, x) = \min\{i(t', x), t_1 < t' \leq t_n\}$
timselmax	Time range maximum For every adjacent sequence t_1, \dots, t_n of time steps of the same selected time range it is: $o(t, x) = \max\{i(t', x), t_1 < t' \leq t_n\}$
timselsum	Time range sum For every adjacent sequence t_1, \dots, t_n of time steps of the same selected time range it is: $o(t, x) = \sum\{i(t', x), t_1 < t' \leq t_n\}$
timselmean	Time range mean For every adjacent sequence t_1, \dots, t_n of time steps of the same selected time range it is: $o(t, x) = \text{mean}\{i(t', x), t_1 < t' \leq t_n\}$
timselavg	Time range average For every adjacent sequence t_1, \dots, t_n of time steps of the same selected time range it is: $o(t, x) = \text{avg}\{i(t', x), t_1 < t' \leq t_n\}$
timselvar	Time range variance For every adjacent sequence t_1, \dots, t_n of time steps of the same selected time range it is: $o(t, x) = \text{var}\{i(t', x), t_1 < t' \leq t_n\}$
timselstd	Time range standard deviation For every adjacent sequence t_1, \dots, t_n of time steps of the same selected time range it is: $o(t, x) = \text{std}\{i(t', x), t_1 < t' \leq t_n\}$

Parameter

<i>nsets</i>	INTEGER	Number of input time steps for each output time step
<i>noffset</i>	INTEGER	Number of input time steps skipped before the first time step range (optional)
<i>nskip</i>	INTEGER	Number of input time steps skipped between time step ranges (optional)

Example

Assume an input dataset has monthly means over several years. To compute seasonal means from monthly means the first two month have to be skipped:

```
cdo timselmean,3,2 ifile ofile
```

2.8.10. TIMSELPCTL - Time range percentile values

Synopsis

```
timselpctl,p,nsets[,noffset[,nskip]] ifile1 ifile2 ifile3 ofile
```

Description

This operator computes percentile values over a selected number of time steps in `ifile1`. The algorithm uses histograms with minimum and maximum bounds given in `ifile2` and `ifile3`, respectively. The default number of histogram bins is 101. The default can be overridden by setting the environment variable `CDO_PCTL_NBINS` to a different value. The files `ifile2` and `ifile3` should be the result of corresponding [timselmin](#) and [timselmax](#) operations, respectively. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`.

For every adjacent sequence t_1, \dots, t_n of time steps of the same selected time range it is:

$$o(t, x) = \text{pth percentile}\{i(t', x), t_1 < t' \leq t_n\}$$

Parameter

<i>p</i>	FLOAT	Percentile number in 0, ..., 100
<i>nsets</i>	INTEGER	Number of input time steps for each output time step
<i>noffset</i>	INTEGER	Number of input time steps skipped before the first time step range (optional)
<i>nskip</i>	INTEGER	Number of input time steps skipped between time step ranges (optional)

Environment

<code>CDO_PCTL_NBINS</code>	Sets the number of histogram bins. The default number is 101.
-----------------------------	---

2.8.11. RUNSTAT - Running statistical values

Synopsis

```
<operator>,nts ifile ofile
```

Description

This module computes running statistical values over a selected number of time steps. Depending on the chosen operator the minimum, maximum, sum, average, variance or standard deviation of a selected number of consecutive time steps read from **ifile** is written to **ofile**. The date information in **ofile** is the date of the middle contributing time step in **ifile**.

Operators

runmin	Running minimum $o(t + (nts - 1)/2, x) = \min\{i(t, x), i(t + 1, x), \dots, i(t + nts - 1, x)\}$
runmax	Running maximum $o(t + (nts - 1)/2, x) = \max\{i(t, x), i(t + 1, x), \dots, i(t + nts - 1, x)\}$
runsum	Running sum $o(t + (nts - 1)/2, x) = \text{sum}\{i(t, x), i(t + 1, x), \dots, i(t + nts - 1, x)\}$
runmean	Running mean $o(t + (nts - 1)/2, x) = \text{mean}\{i(t, x), i(t + 1, x), \dots, i(t + nts - 1, x)\}$
runavg	Running average $o(t + (nts - 1)/2, x) = \text{avg}\{i(t, x), i(t + 1, x), \dots, i(t + nts - 1, x)\}$
runvar	Running variance $o(t + (nts - 1)/2, x) = \text{std}\{i(t, x), i(t + 1, x), \dots, i(t + nts - 1, x)\}$
runstd	Running standard deviation $o(t + (nts - 1)/2, x) = \text{std}\{i(t, x), i(t + 1, x), \dots, i(t + nts - 1, x)\}$

Parameter

nts INTEGER Number of time steps

Environment

RUNSTAT_DATE Sets the date information in ofile to the "first", "last" or "middle" contributing time step in ifile.

Example

To compute the running mean over 9 time steps use:

```
cdo runmean,9 ifile ofile
```


2.8.12. RUNPCTL - Running percentile values

Synopsis

```
runpctl,p,nts ifile1 ofile
```

Description

This module computes running percentiles over a selected number of time steps in `ifile1`. The date information in `ofile` is the date of the medium contributing time step in `ifile1`.

$$o(t + (nts - 1)/2, x) = \mathbf{pth\ percentile}\{i(t, x), i(t + 1, x), \dots, i(t + nts - 1, x)\}$$

Parameter

<i>p</i>	FLOAT	Percentile number in 0, ..., 100
<i>nts</i>	INTEGER	Number of time steps

Example

To compute the running 50th percentile (median) over 9 time steps use:

```
cdo runpctl,50,9 ifile -runmin,9 ifile -runmax,9 ifile ofile
```

2.8.13. TIMSTAT - Statistical values over all time steps

Synopsis

```
<operator> ifile ofile
```

Description

This module computes statistical values over all time steps in **ifile**. Depending on the chosen operator the minimum, maximum, sum, average, variance or standard deviation of all time steps read from **ifile** is written to **ofile**. The date information of a time step in **ofile** is the date of the last contributing time step in **ifile**.

Operators

timmin	Time minimum $o(1, x) = \mathbf{min}\{i(t', x), t_1 < t' \leq t_n\}$
timmax	Time maximum $o(1, x) = \mathbf{max}\{i(t', x), t_1 < t' \leq t_n\}$
timsun	Time sum $o(1, x) = \mathbf{sum}\{i(t', x), t_1 < t' \leq t_n\}$
timmean	Time mean $o(1, x) = \mathbf{mean}\{i(t', x), t_1 < t' \leq t_n\}$
timavg	Time average $o(1, x) = \mathbf{avg}\{i(t', x), t_1 < t' \leq t_n\}$
timvar	Time variance $o(1, x) = \mathbf{var}\{i(t', x), t_1 < t' \leq t_n\}$
timstd	Time standard deviation $o(1, x) = \mathbf{std}\{i(t', x), t_1 < t' \leq t_n\}$

Example

To compute the mean over all input time steps use:

```
cdo timmean ifile ofile
```

2.8.14. TIMPCTL - Percentile values over all time steps

Synopsis

```
timpctl,p ifile1 ifile2 ifile3 ofile
```

Description

This operator computes percentiles over all time steps in `ifile1`. The algorithm uses histograms with minimum and maximum bounds given in `ifile2` and `ifile3`, respectively. The default number of histogram bins is 101. The default can be overridden by setting the environment variable `CDO_PCTL_NBINS` to a different value. The files `ifile2` and `ifile3` should be the result of corresponding `timmin` and `timmax` operations, respectively. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`.

$$o(1, x) = \text{pth percentile}\{i(t', x), t_1 < t' \leq t_n\}$$

Parameter

<i>p</i>	FLOAT	Percentile number in 0, ..., 100
----------	-------	----------------------------------

Environment

<code>CDO_PCTL_NBINS</code>	Sets the number of histogram bins. The default number is 101.
-----------------------------	---

Example

To compute the 90th percentile over all input time steps use:

```
cdo timmin ifile minfile
cdo timmax ifile maxfile
cdo timpctl,90 ifile minfile maxfile ofile
```

Or shorter using operator piping:

```
cdo timpctl,90 ifile -timmin ifile -timmax ifile ofile
```

2.8.15. HOURSTAT - Hourly statistical values

Synopsis

```
<operator> ifile ofile
```

Description

This module computes statistical values over time steps of the same hour. Depending on the chosen operator the minimum, maximum, sum, average, variance or standard deviation of time steps of the same hour is written to `ofile`. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`.

Operators

hourmin	Hourly minimum For every adjacent sequence t_1, \dots, t_n of time steps of the same hour it is: $o(t, x) = \mathbf{min}\{i(t', x), t_1 < t' \leq t_n\}$
hourmax	Hourly maximum For every adjacent sequence t_1, \dots, t_n of time steps of the same hour it is: $o(t, x) = \mathbf{max}\{i(t', x), t_1 < t' \leq t_n\}$
hoursum	Hourly sum For every adjacent sequence t_1, \dots, t_n of time steps of the same hour it is: $o(t, x) = \mathbf{sum}\{i(t', x), t_1 < t' \leq t_n\}$
hourmean	Hourly mean For every adjacent sequence t_1, \dots, t_n of time steps of the same hour it is: $o(t, x) = \mathbf{mean}\{i(t', x), t_1 < t' \leq t_n\}$
houravg	Hourly average For every adjacent sequence t_1, \dots, t_n of time steps of the same hour it is: $o(t, x) = \mathbf{avg}\{i(t', x), t_1 < t' \leq t_n\}$
hourvar	Hourly variance For every adjacent sequence t_1, \dots, t_n of time steps of the same hour it is: $o(t, x) = \mathbf{var}\{i(t', x), t_1 < t' \leq t_n\}$
hourstd	Hourly standard deviation For every adjacent sequence t_1, \dots, t_n of time steps of the same hour it is: $o(t, x) = \mathbf{std}\{i(t', x), t_1 < t' \leq t_n\}$

Example

To compute the hourly mean of a time series use:

```
cdo hourmean ifile ofile
```

2.8.16. HOURPCTL - Hourly percentile values

Synopsis

```
hourpctl,p ifile1 ifile2 ifile3 ofile
```

Description

This operator computes percentiles over all time steps of the same hour in `ifile1`. The algorithm uses histograms with minimum and maximum bounds given in `ifile2` and `ifile3`, respectively. The default number of histogram bins is 101. The default can be overridden by setting the environment variable `CDO_PCTL_NBINS` to a different value. The files `ifile2` and `ifile3` should be the result of corresponding `hourmin` and `hourmax` operations, respectively. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`.

For every adjacent sequence t_1, \dots, t_n of time steps of the same hour it is:

$$o(t, x) = \text{pth percentile}\{i(t', x), t_1 < t' \leq t_n\}$$

Parameter

<i>p</i>	FLOAT	Percentile number in 0, ..., 100
----------	-------	----------------------------------

Environment

<code>CDO_PCTL_NBINS</code>	Sets the number of histogram bins. The default number is 101.
-----------------------------	---

Example

To compute the hourly 90th percentile of a time series use:

```
cdo hourmin ifile minfile
cdo hourmax ifile maxfile
cdo hourpctl,90 ifile minfile maxfile ofile
```

Or shorter using operator piping:

```
cdo hourpctl,90 ifile -hourmin ifile -hourmax ifile ofile
```

2.8.17. DAYSTAT - Daily statistical values

Synopsis

```
<operator> ifile ofile
```

Description

This module computes statistical values over time steps of the same day. Depending on the chosen operator the minimum, maximum, sum, average, variance or standard deviation of time steps of the same day is written to `ofile`. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`.

Operators

daymin	Daily minimum For every adjacent sequence t_1, \dots, t_n of time steps of the same day it is: $o(t, x) = \mathbf{min}\{i(t', x), t_1 < t' \leq t_n\}$
daymax	Daily maximum For every adjacent sequence t_1, \dots, t_n of time steps of the same day it is: $o(t, x) = \mathbf{max}\{i(t', x), t_1 < t' \leq t_n\}$
daysum	Daily sum For every adjacent sequence t_1, \dots, t_n of time steps of the same day it is: $o(t, x) = \mathbf{sum}\{i(t', x), t_1 < t' \leq t_n\}$
daymean	Daily mean For every adjacent sequence t_1, \dots, t_n of time steps of the same day it is: $o(t, x) = \mathbf{mean}\{i(t', x), t_1 < t' \leq t_n\}$
dayavg	Daily average For every adjacent sequence t_1, \dots, t_n of time steps of the same day it is: $o(t, x) = \mathbf{avg}\{i(t', x), t_1 < t' \leq t_n\}$
dayvar	Daily variance For every adjacent sequence t_1, \dots, t_n of time steps of the same day it is: $o(t, x) = \mathbf{var}\{i(t', x), t_1 < t' \leq t_n\}$
daystd	Daily standard deviation For every adjacent sequence t_1, \dots, t_n of time steps of the same day it is: $o(t, x) = \mathbf{std}\{i(t', x), t_1 < t' \leq t_n\}$

Example

To compute the daily mean of a time series use:

```
cdo daymean ifile ofile
```

2.8.18. DAYPCTL - Daily percentile values

Synopsis

```
daypctl,p ifile1 ifile2 ifile3 ofile
```

Description

This operator computes percentiles over all time steps of the same day in `ifile1`. The algorithm uses histograms with minimum and maximum bounds given in `ifile2` and `ifile3`, respectively. The default number of histogram bins is 101. The default can be overridden by defining the environment variable `CDO_PCTL_NBINS`. The files `ifile2` and `ifile3` should be the result of corresponding [daymin](#) and [daymax](#) operations, respectively. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`.

For every adjacent sequence t_1, \dots, t_n of time steps of the same day it is:

$$o(t, x) = \text{pth percentile}\{i(t', x), t_1 < t' \leq t_n\}$$

Parameter

<code>p</code>	FLOAT	Percentile number in 0, ..., 100
----------------	-------	----------------------------------

Environment

<code>CDO_PCTL_NBINS</code>	Sets the number of histogram bins. The default number is 101.
-----------------------------	---

Example

To compute the daily 90th percentile of a time series use:

```
cdo daymin ifile minfile
cdo daymax ifile maxfile
cdo daypctl,90 ifile minfile maxfile ofile
```

Or shorter using operator piping:

```
cdo daypctl,90 ifile -daymin ifile -daymax ifile ofile
```

2.8.19. MONSTAT - Monthly statistical values

Synopsis

```
<operator> ifile ofile
```

Description

This module computes statistical values over time steps of the same month. Depending on the chosen operator the minimum, maximum, sum, average, variance or standard deviation of time steps of the same month is written to `ofile`. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`.

Operators

monmin	Monthly minimum For every adjacent sequence t_1, \dots, t_n of time steps of the same month it is: $o(t, x) = \mathbf{min}\{i(t', x), t_1 < t' \leq t_n\}$
monmax	Monthly maximum For every adjacent sequence t_1, \dots, t_n of time steps of the same month it is: $o(t, x) = \mathbf{max}\{i(t', x), t_1 < t' \leq t_n\}$
monsum	Monthly sum For every adjacent sequence t_1, \dots, t_n of time steps of the same month it is: $o(t, x) = \mathbf{sum}\{i(t', x), t_1 < t' \leq t_n\}$
monmean	Monthly mean For every adjacent sequence t_1, \dots, t_n of time steps of the same month it is: $o(t, x) = \mathbf{mean}\{i(t', x), t_1 < t' \leq t_n\}$
monavg	Monthly average For every adjacent sequence t_1, \dots, t_n of time steps of the same month it is: $o(t, x) = \mathbf{avg}\{i(t', x), t_1 < t' \leq t_n\}$
monvar	Monthly variance For every adjacent sequence t_1, \dots, t_n of time steps of the same month it is: $o(t, x) = \mathbf{var}\{i(t', x), t_1 < t' \leq t_n\}$
monstd	Monthly standard deviation For every adjacent sequence t_1, \dots, t_n of time steps of the same month it is: $o(t, x) = \mathbf{std}\{i(t', x), t_1 < t' \leq t_n\}$

Example

To compute the monthly mean of a time series use:

```
cdo monmean ifile ofile
```


2.8.20. MONPCTL - Monthly percentile values

Synopsis

```
monpctl,p ifile1 ifile2 ifile3 ofile
```

Description

This operator computes percentiles over all time steps of the same month in `ifile1`. The algorithm uses histograms with minimum and maximum bounds given in `ifile2` and `ifile3`, respectively. The default number of histogram bins is 101. The default can be overridden by setting the environment variable `CDO_PCTL_NBINS` to a different value. The files `ifile2` and `ifile3` should be the result of corresponding `monmin` and `monmax` operations, respectively. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`.

For every adjacent sequence t_1, \dots, t_n of time steps of the same month it is:

$$o(t, x) = \text{pth percentile}\{i(t', x), t_1 < t' \leq t_n\}$$

Parameter

<i>p</i>	FLOAT	Percentile number in 0, ..., 100
----------	-------	----------------------------------

Environment

<code>CDO_PCTL_NBINS</code>	Sets the number of histogram bins. The default number is 101.
-----------------------------	---

Example

To compute the monthly 90th percentile of a time series use:

```
cdo monmin ifile minfile
cdo monmax ifile maxfile
cdo monpctl,90 ifile minfile maxfile ofile
```

Or shorter using operator piping:

```
cdo monpctl,90 ifile -monmin ifile -monmax ifile ofile
```

2.8.21. YEARSTAT - Yearly statistical values

Synopsis

```
<operator> ifile ofile
```

Description

This module computes statistical values over time steps of the same year. Depending on the chosen operator the minimum, maximum, sum, average, variance or standard deviation of time steps of the same year is written to `ofile`. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`.

Operators

yearmin	Yearly minimum For every adjacent sequence t_1, \dots, t_n of time steps of the same year it is: $o(t, x) = \mathbf{min}\{i(t', x), t_1 < t' \leq t_n\}$
yearmax	Yearly maximum For every adjacent sequence t_1, \dots, t_n of time steps of the same year it is: $o(t, x) = \mathbf{max}\{i(t', x), t_1 < t' \leq t_n\}$
yearsum	Yearly sum For every adjacent sequence t_1, \dots, t_n of time steps of the same year it is: $o(t, x) = \mathbf{sum}\{i(t', x), t_1 < t' \leq t_n\}$
yearmean	Yearly mean For every adjacent sequence t_1, \dots, t_n of time steps of the same year it is: $o(t, x) = \mathbf{mean}\{i(t', x), t_1 < t' \leq t_n\}$
yearavg	Yearly average For every adjacent sequence t_1, \dots, t_n of time steps of the same year it is: $o(t, x) = \mathbf{avg}\{i(t', x), t_1 < t' \leq t_n\}$
yearvar	Yearly variance For every adjacent sequence t_1, \dots, t_n of time steps of the same year it is: $o(t, x) = \mathbf{var}\{i(t', x), t_1 < t' \leq t_n\}$
yearstd	Yearly standard deviation For every adjacent sequence t_1, \dots, t_n of time steps of the same year it is: $o(t, x) = \mathbf{std}\{i(t', x), t_1 < t' \leq t_n\}$

Note

The operators `yearmean` and `yearavg` compute only arithmetical means!

Example

To compute the yearly mean of a time series use:

```
cdo yearmean ifile ofile
```

To compute the yearly mean from the correct weighted monthly mean use:

```
cdo divdpy -yearsum -muldpm ifile ofile
```

2.8.22. YEARPCTL - Yearly percentile values

Synopsis

```
yearpctl,p ifile1 ifile2 ifile3 ofile
```

Description

This operator computes percentiles over all time steps of the same year in `ifile1`. The algorithm uses histograms with minimum and maximum bounds given in `ifile2` and `ifile3`, respectively. The default number of histogram bins is 101. The default can be overridden by setting the environment variable `CDO_PCTL_NBINS` to a different value. The files `ifile2` and `ifile3` should be the result of corresponding `yearmin` and `yearmax` operations, respectively. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`.

For every adjacent sequence t_1, \dots, t_n of time steps of the same year it is:

$$o(t, x) = \text{pth percentile}\{i(t', x), t_1 < t' \leq t_n\}$$

Parameter

<code>p</code>	FLOAT	Percentile number in 0, ..., 100
----------------	-------	----------------------------------

Environment

<code>CDO_PCTL_NBINS</code>	Sets the number of histogram bins. The default number is 101.
-----------------------------	---

Example

To compute the yearly 90th percentile of a time series use:

```
cdo yearmin ifile minfile
cdo yearmax ifile maxfile
cdo yearpctl,90 ifile minfile maxfile ofile
```

Or shorter using operator piping:

```
cdo yearpctl,90 ifile -yearmin ifile -yearmax ifile ofile
```

2.8.23. SEASSTAT - Seasonal statistical values

Synopsis

```
<operator> ifile ofile
```

Description

This module computes statistical values over time steps of the same season. Depending on the chosen operator the minimum, maximum, sum, average, variance or standard deviation of time steps of the same season is written to `ofile`. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. Be careful about the first and the last output time step, they may be incorrect values if the seasons have incomplete time steps.

Operators

seasmin	Seasonal minimum For every adjacent sequence t_1, \dots, t_n of time steps of the same season it is: $o(t, x) = \mathbf{min}\{i(t', x), t_1 < t' \leq t_n\}$
seasmax	Seasonal maximum For every adjacent sequence t_1, \dots, t_n of time steps of the same season it is: $o(t, x) = \mathbf{max}\{i(t', x), t_1 < t' \leq t_n\}$
seassum	Seasonal sum For every adjacent sequence t_1, \dots, t_n of time steps of the same season it is: $o(t, x) = \mathbf{sum}\{i(t', x), t_1 < t' \leq t_n\}$
seasmean	Seasonal mean For every adjacent sequence t_1, \dots, t_n of time steps of the same season it is: $o(t, x) = \mathbf{mean}\{i(t', x), t_1 < t' \leq t_n\}$
seasavg	Seasonal average For every adjacent sequence t_1, \dots, t_n of time steps of the same season it is: $o(t, x) = \mathbf{avg}\{i(t', x), t_1 < t' \leq t_n\}$
seasvar	Seasonal variance For every adjacent sequence t_1, \dots, t_n of time steps of the same season it is: $o(t, x) = \mathbf{var}\{i(t', x), t_1 < t' \leq t_n\}$
seasstd	Seasonal standard deviation For every adjacent sequence t_1, \dots, t_n of time steps of the same season it is: $o(t, x) = \mathbf{std}\{i(t', x), t_1 < t' \leq t_n\}$

Example

To compute the seasonal mean of a time series use:

```
cdo seasmean ifile ofile
```

2.8.24. SEASPCTL - Seasonal percentile values

Synopsis

```
seaspctl,p ifile1 ifile2 ifile3 ofile
```

Description

This operator computes percentiles over all time steps in `ifile1` of the same season. The algorithm uses histograms with minimum and maximum bounds given in `ifile2` and `ifile3`, respectively. The default number of histogram bins is 101. The default can be overridden by setting the environment variable `CDO_PCTL_NBINS` to a different value. The files `ifile2` and `ifile3` should be the result of corresponding `seasmin` and `seasmax` operations, respectively. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. Be careful about the first and the last output time step, they may be incorrect values if the seasons have incomplete time steps.

For every adjacent sequence t_1, \dots, t_n of time steps of the same season it is:

$$o(t, x) = \text{pth percentile}\{i(t', x), t_1 < t' \leq t_n\}$$

Parameter

`p` FLOAT Percentile number in 0, ..., 100

Environment

`CDO_PCTL_NBINS` Sets the number of histogram bins. The default number is 101.

Example

To compute the seasonal 90th percentile of a time series use:

```
cdo seasmin ifile minfile
cdo seasmax ifile maxfile
cdo seaspctl,90 ifile minfile maxfile ofile
```

Or shorter using operator piping:

```
cdo seaspctl,90 ifile -seasmin ifile -seasmax ifile ofile
```

2.8.25. YHOURSTAT - Multi-year hourly statistical values

Synopsis

`<operator> ifile ofile`

Description

This module computes statistical values of each hour and day of year. Depending on the chosen operator the minimum, maximum, sum, average, variance or standard deviation of each hour and day of year in `ifile` is written to `ofile`. The date information in an output field is the date of the last contributing input field.

Operators

yhourmin	Multi-year hourly minimum $o(0001, x) = \mathbf{min}\{i(t, x), \text{day}(i(t)) = 0001\}$ \vdots $o(8784, x) = \mathbf{min}\{i(t, x), \text{day}(i(t)) = 8784\}$
yhourmax	Multi-year hourly maximum $o(0001, x) = \mathbf{max}\{i(t, x), \text{day}(i(t)) = 0001\}$ \vdots $o(8784, x) = \mathbf{max}\{i(t, x), \text{day}(i(t)) = 8784\}$
yhoursum	Multi-year hourly sum $o(0001, x) = \mathbf{sum}\{i(t, x), \text{day}(i(t)) = 0001\}$ \vdots $o(8784, x) = \mathbf{sum}\{i(t, x), \text{day}(i(t)) = 8784\}$
yhourmean	Multi-year hourly mean $o(0001, x) = \mathbf{mean}\{i(t, x), \text{day}(i(t)) = 0001\}$ \vdots $o(8784, x) = \mathbf{mean}\{i(t, x), \text{day}(i(t)) = 8784\}$
yhouravg	Multi-year hourly average $o(0001, x) = \mathbf{avg}\{i(t, x), \text{day}(i(t)) = 0001\}$ \vdots $o(8784, x) = \mathbf{avg}\{i(t, x), \text{day}(i(t)) = 8784\}$
yhourvar	Multi-year hourly variance $o(0001, x) = \mathbf{var}\{i(t, x), \text{day}(i(t)) = 0001\}$ \vdots $o(8784, x) = \mathbf{var}\{i(t, x), \text{day}(i(t)) = 8784\}$
yhourstd	Multi-year hourly standard deviation $o(0001, x) = \mathbf{std}\{i(t, x), \text{day}(i(t)) = 0001\}$ \vdots $o(8784, x) = \mathbf{std}\{i(t, x), \text{day}(i(t)) = 8784\}$

Example

To compute the hourly mean for all days over all input years use:

```
cdo yhourmean ifile ofile
```

2.8.26. YDAYSTAT - Multi-year daily statistical values

Synopsis

```
<operator> ifile ofile
```

Description

This module computes statistical values of each day of year. Depending on the chosen operator the minimum, maximum, sum, average, variance or standard deviation of each day of year in **ifile** is written to **ofile**. The date information in an output field is the date of the last contributing input field.

Operators

ydaymin	Multi-year daily minimum $o(001, x) = \min\{i(t, x), \text{day}(i(t)) = 001\}$ \vdots $o(366, x) = \min\{i(t, x), \text{day}(i(t)) = 366\}$
ydaymax	Multi-year daily maximum $o(001, x) = \max\{i(t, x), \text{day}(i(t)) = 001\}$ \vdots $o(366, x) = \max\{i(t, x), \text{day}(i(t)) = 366\}$
ydaysum	Multi-year daily sum $o(001, x) = \text{sum}\{i(t, x), \text{day}(i(t)) = 001\}$ \vdots $o(366, x) = \text{sum}\{i(t, x), \text{day}(i(t)) = 366\}$
ydaymean	Multi-year daily mean $o(001, x) = \text{mean}\{i(t, x), \text{day}(i(t)) = 001\}$ \vdots $o(366, x) = \text{mean}\{i(t, x), \text{day}(i(t)) = 366\}$
ydayavg	Multi-year daily average $o(001, x) = \text{avg}\{i(t, x), \text{day}(i(t)) = 001\}$ \vdots $o(366, x) = \text{avg}\{i(t, x), \text{day}(i(t)) = 366\}$
ydayvar	Multi-year daily variance $o(001, x) = \text{var}\{i(t, x), \text{day}(i(t)) = 001\}$ \vdots $o(366, x) = \text{var}\{i(t, x), \text{day}(i(t)) = 366\}$
ydaystd	Multi-year daily standard deviation $o(001, x) = \text{std}\{i(t, x), \text{day}(i(t)) = 001\}$ \vdots $o(366, x) = \text{std}\{i(t, x), \text{day}(i(t)) = 366\}$

Example

To compute the daily mean over all input years use:

```
cdo ydaymean ifile ofile
```

2.8.27. YDAYPCTL - Multi-year daily percentile values

Synopsis

```
ydaypctl,p ifile1 ifile2 ifile3 ofile
```

Description

This operator writes a certain percentile of each day of year in `ifile1` to `ofile`. The algorithm uses histograms with minimum and maximum bounds given in `ifile2` and `ifile3`, respectively. The default number of histogram bins is 101. The default can be overridden by setting the environment variable `CDO_PCTL_NBINS` to a different value. The files `ifile2` and `ifile3` should be the result of corresponding `ydaymin` and `ydaymax` operations, respectively. The date information in an output field is the date of the last contributing input field.

$$\begin{aligned} o(001, x) &= \text{pth percentile}\{i(t, x), \text{day}(i(t)) = 001\} \\ &\vdots \\ o(366, x) &= \text{pth percentile}\{i(t, x), \text{day}(i(t)) = 366\} \end{aligned}$$

Parameter

`p` FLOAT Percentile number in 0, ..., 100

Environment

`CDO_PCTL_NBINS` Sets the number of histogram bins. The default number is 101.

Example

To compute the daily 90th percentile over all input years use:

```
cdo ydaymin ifile minfile
cdo ydaymax ifile maxfile
cdo ydaypctl,90 ifile minfile maxfile ofile
```

Or shorter using operator piping:

```
cdo ydaypctl,90 ifile -ydaymin ifile -ydaymax ifile ofile
```


2.8.28. YMONSTAT - Multi-year monthly statistical values

Synopsis

```
<operator> ifile ofile
```

Description

This module computes statistical values of each month of year. Depending on the chosen operator the minimum, maximum, sum, average, variance or standard deviation of each month of year in `ifile` is written to `ofile`. The date information in an output field is the date of the last contributing input field.

Operators

ymonmin	Multi-year monthly minimum $o(01, x) = \min\{i(t, x), \text{month}(i(t)) = 01\}$ \vdots $o(12, x) = \min\{i(t, x), \text{month}(i(t)) = 12\}$
ymonmax	Multi-year monthly maximum $o(01, x) = \max\{i(t, x), \text{month}(i(t)) = 01\}$ \vdots $o(12, x) = \max\{i(t, x), \text{month}(i(t)) = 12\}$
ymonsum	Multi-year monthly sum $o(01, x) = \text{sum}\{i(t, x), \text{month}(i(t)) = 01\}$ \vdots $o(12, x) = \text{sum}\{i(t, x), \text{month}(i(t)) = 12\}$
ymonmean	Multi-year monthly mean $o(01, x) = \text{mean}\{i(t, x), \text{month}(i(t)) = 01\}$ \vdots $o(12, x) = \text{mean}\{i(t, x), \text{month}(i(t)) = 12\}$
ymonavg	Multi-year monthly average $o(01, x) = \text{avg}\{i(t, x), \text{month}(i(t)) = 01\}$ \vdots $o(12, x) = \text{avg}\{i(t, x), \text{month}(i(t)) = 12\}$
ymonvar	Multi-year monthly variance $o(01, x) = \text{var}\{i(t, x), \text{month}(i(t)) = 01\}$ \vdots $o(12, x) = \text{var}\{i(t, x), \text{month}(i(t)) = 12\}$
ymonstd	Multi-year monthly standard deviation $o(01, x) = \text{std}\{i(t, x), \text{month}(i(t)) = 01\}$ \vdots $o(12, x) = \text{std}\{i(t, x), \text{month}(i(t)) = 12\}$

Example

To compute the monthly mean over all input years use:

```
cdo ymonmean ifile ofile
```

2.8.29. YMONPCTL - Multi-year monthly percentile values

Synopsis

```
ymonpctl,p ifile1 ifile2 ifile3 ofile
```

Description

This operator writes a certain percentile of each month of year in `ifile1` to `ofile`. The algorithm uses histograms with minimum and maximum bounds given in `ifile2` and `ifile3`, respectively. The default number of histogram bins is 101. The default can be overridden by setting the environment variable `CDO_PCTL_NBINS` to a different value. The files `ifile2` and `ifile3` should be the result of corresponding `ymonmin` and `ymonmax` operations, respectively. The date information in an output field is the date of the last contributing input field.

$$o(01, x) = \text{pth percentile}\{i(t, x), \text{month}(i(t)) = 01\}$$

$$\vdots$$

$$o(12, x) = \text{pth percentile}\{i(t, x), \text{month}(i(t)) = 12\}$$

Parameter

p FLOAT Percentile number in 0, ..., 100

Environment

`CDO_PCTL_NBINS` Sets the number of histogram bins. The default number is 101.

Example

To compute the monthly 90th percentile over all input years use:

```
cdo ymonmin ifile minfile
cdo ymonmax ifile maxfile
cdo ymonpctl,90 ifile minfile maxfile ofile
```

Or shorter using operator piping:

```
cdo ymonpctl,90 ifile -ymonmin ifile -ymonmax ifile ofile
```

2.8.30. YSEASSTAT - Multi-year seasonal statistical values

Synopsis

`<operator> ifile ofile`

Description

This module computes statistical values of each season. Depending on the chosen operator the minimum, maximum, sum, average, variance or standard deviation of each season in `ifile` is written to `ofile`. The date information in an output field is the date of the last contributing input field.

Operators

yseasmin	Multi-year seasonal minimum $o(1, x) = \min\{i(t, x), \text{month}(i(t)) = 12, 01, 02\}$ $o(2, x) = \min\{i(t, x), \text{month}(i(t)) = 03, 04, 05\}$ $o(3, x) = \min\{i(t, x), \text{month}(i(t)) = 06, 07, 08\}$ $o(4, x) = \min\{i(t, x), \text{month}(i(t)) = 09, 10, 11\}$
yseasmax	Multi-year seasonal maximum $o(1, x) = \max\{i(t, x), \text{month}(i(t)) = 12, 01, 02\}$ $o(2, x) = \max\{i(t, x), \text{month}(i(t)) = 03, 04, 05\}$ $o(3, x) = \max\{i(t, x), \text{month}(i(t)) = 06, 07, 08\}$ $o(4, x) = \max\{i(t, x), \text{month}(i(t)) = 09, 10, 11\}$
yseassum	Multi-year seasonal sum $o(1, x) = \text{sum}\{i(t, x), \text{month}(i(t)) = 12, 01, 02\}$ $o(2, x) = \text{sum}\{i(t, x), \text{month}(i(t)) = 03, 04, 05\}$ $o(3, x) = \text{sum}\{i(t, x), \text{month}(i(t)) = 06, 07, 08\}$ $o(4, x) = \text{sum}\{i(t, x), \text{month}(i(t)) = 09, 10, 11\}$
yseasmean	Multi-year seasonal mean $o(1, x) = \text{mean}\{i(t, x), \text{month}(i(t)) = 12, 01, 02\}$ $o(2, x) = \text{mean}\{i(t, x), \text{month}(i(t)) = 03, 04, 05\}$ $o(3, x) = \text{mean}\{i(t, x), \text{month}(i(t)) = 06, 07, 08\}$ $o(4, x) = \text{mean}\{i(t, x), \text{month}(i(t)) = 09, 10, 11\}$
yseasavg	Multi-year seasonal average $o(1, x) = \text{avg}\{i(t, x), \text{month}(i(t)) = 12, 01, 02\}$ $o(2, x) = \text{avg}\{i(t, x), \text{month}(i(t)) = 03, 04, 05\}$ $o(3, x) = \text{avg}\{i(t, x), \text{month}(i(t)) = 06, 07, 08\}$ $o(4, x) = \text{avg}\{i(t, x), \text{month}(i(t)) = 09, 10, 11\}$
yseasvar	Multi-year seasonal variance $o(1, x) = \text{var}\{i(t, x), \text{month}(i(t)) = 12, 01, 02\}$ $o(2, x) = \text{var}\{i(t, x), \text{month}(i(t)) = 03, 04, 05\}$ $o(3, x) = \text{var}\{i(t, x), \text{month}(i(t)) = 06, 07, 08\}$ $o(4, x) = \text{var}\{i(t, x), \text{month}(i(t)) = 09, 10, 11\}$
yseasstd	Multi-year seasonal standard deviation $o(1, x) = \text{std}\{i(t, x), \text{month}(i(t)) = 12, 01, 02\}$ $o(2, x) = \text{std}\{i(t, x), \text{month}(i(t)) = 03, 04, 05\}$ $o(3, x) = \text{std}\{i(t, x), \text{month}(i(t)) = 06, 07, 08\}$ $o(4, x) = \text{std}\{i(t, x), \text{month}(i(t)) = 09, 10, 11\}$

Example

To compute the seasonal mean over all input years use:

```
cdo yseasmean ifile ofile
```

2.8.31. YSEASPCTL - Multi-year seasonal percentile values

Synopsis

```
yseaspctl,p ifile1 ifile2 ifile3 ofile
```

Description

This operator writes a certain percentile of each season in `ifile1` to `ofile`. The algorithm uses histograms with minimum and maximum bounds given in `ifile2` and `ifile3`, respectively. The default number of histogram bins is 101. The default can be overridden by setting the environment variable `CD0_PCTL_NBINS` to a different value. The files `ifile2` and `ifile3` should be the result of corresponding [yseasmin](#) and [yseasmax](#) operations, respectively. The date information in an output field is the date of the last contributing input field.

$$\begin{aligned} o(1, x) &= \text{pth percentile}\{i(t, x), \text{month}(i(t)) = 12, 01, 02\} \\ o(2, x) &= \text{pth percentile}\{i(t, x), \text{month}(i(t)) = 03, 04, 05\} \\ o(3, x) &= \text{pth percentile}\{i(t, x), \text{month}(i(t)) = 06, 07, 08\} \\ o(4, x) &= \text{pth percentile}\{i(t, x), \text{month}(i(t)) = 09, 10, 11\} \end{aligned}$$

Parameter

`p` FLOAT Percentile number in 0, ..., 100

Environment

`CD0_PCTL_NBINS` Sets the number of histogram bins. The default number is 101.

Example

To compute the seasonal 90th percentile over all input years use:

```
cdo yseasmin ifile minfile
cdo yseasmax ifile maxfile
cdo yseaspctl,90 ifile minfile maxfile ofile
```

Or shorter using operator piping:

```
cdo yseaspctl,90 ifile -yseasmin ifile -yseasmax ifile ofile
```

2.8.32. YDRUNSTAT - Multi-year daily running statistical values

Synopsis

`<operator>,nts ifile ofile`

Description

This module writes running statistical values for each day of year in `ifile` to `ofile`. Depending on the chosen operator, the minimum, maximum, sum, average, variance or standard deviation of all time steps in running windows of which the medium time step corresponds to a certain day of year is computed. The date information in an output field is the date of the medium time step in the last contributing running window. Note that the operator have to be applied to a continuous time series of daily measurements in order to yield physically meaningful results. Also note that the output time series begins $(nts-1)/2$ time steps after the first time step of the input time series and ends $(nts-1)/2$ time steps before the last one. For input data which are complete but not continuous, such as time series of daily measurements for the same month or season within different years, the operator yields physically meaningful results only if the input time series does include the $(nts-1)/2$ days before and after each period of interest.

Operators

ydrunmin	Multi-year daily running minimum $o(001, x) = \min\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 001\}$ \vdots $o(366, x) = \min\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 366\}$
ydrunmax	Multi-year daily running maximum $o(001, x) = \max\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 001\}$ \vdots $o(366, x) = \max\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 366\}$
ydrunsum	Multi-year daily running sum $o(001, x) = \sum\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 001\}$ \vdots $o(366, x) = \sum\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 366\}$
ydrunmean	Multi-year daily running mean $o(001, x) = \text{mean}\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 001\}$ \vdots $o(366, x) = \text{mean}\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 366\}$
ydrunavg	Multi-year daily running average $o(001, x) = \text{avg}\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 001\}$ \vdots $o(366, x) = \text{avg}\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 366\}$
ydrunvar	Multi-year daily running variance $o(001, x) = \text{var}\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 001\}$ \vdots $o(366, x) = \text{var}\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 366\}$
ydrunstd	Multi-year daily running standard deviation $o(001, x) = \text{std}\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 001\}$ \vdots $o(366, x) = \text{std}\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 366\}$

Parameter

nts INTEGER Number of time steps

Example

Assume the input data provide a continuous time series of daily measurements. To compute the running multi-year daily mean over all input time steps for a running window of five days use:

```
cdo ydrunmean,5 ifile ofile
```

Note that except for the standard deviation the results of the operators in this module are equivalent to a composition of corresponding operators from the [YDAYSTAT](#) and [RUNSTAT](#) modules. For instance, the above command yields the same result as:

```
cdo ydaymean -runmean,5 ifile ofile
```

2.8.33. YDRUNPCTL - Multi-year daily running percentile values

Synopsis

```
ydrunpctl,p,nts ifile1 ifile2 ifile3 ofile
```

Description

This operator writes running percentile values for each day of year in `ifile1` to `ofile`. A certain percentile is computed for all time steps in running windows of which the medium time step corresponds to a certain day of year. The algorithm uses histograms with minimum and maximum bounds given in `ifile2` and `ifile3`, respectively. The default number of histogram bins is 101. The default can be overridden by setting the environment variable `CDO_PCTL_NBINS` to a different value. The files `ifile2` and `ifile3` should be the result of corresponding `ydrunmin` and `ydrunmax` operations, respectively. The date information in an output field is the date of the medium time step in the last contributing running window. Note that the operator have to be applied to a continuous time series of daily measurements in order to yield physically meaningful results. Also note that the output time series begins $(nts-1)/2$ time steps after the first time step of the input time series and ends $(nts-1)/2$ time steps before the last. For input data which are complete but not continuous, such as time series of daily measurements for the same month or season within different years, the operator only yields physically meaningful results if the input time series does include the $(nts-1)/2$ days before and after each period of interest.

$$\begin{aligned} o(001, x) &= \text{pth percentile}\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 001\} \\ &\vdots \\ o(366, x) &= \text{pth percentile}\{i(t, x), i(t+1, x), \dots, i(t+nts-1, x); \text{day}[(i(t+(nts-1)/2)] = 366\} \end{aligned}$$

Parameter

<i>p</i>	FLOAT	Percentile number in 0, ..., 100
<i>nts</i>	INTEGER	Number of time steps

Environment

<code>CDO_PCTL_NBINS</code>	Sets the number of histogram bins. The default number is 101.
-----------------------------	---

Example

Assume the input data provide a continuous time series of daily measurements. To compute the running multi-year daily 90th percentile over all input time steps for a running window of five days use:

```
cdo ydrunmin,5 ifile minfile
cdo ydrunmax,5 ifile maxfile
cdo ydrunpctl,90,5 ifile minfile maxfile ofile
```

Or shorter using operator piping:

```
cdo ydrunpctl,90,5 ifile -ydrunmin ifile -ydrunmax ifile ofile
```

2.9. Correlation

This sections contains modules for correlation in space and time.

Here is a short overview of all operators in this section:

fldcor	Correlation in grid space
timcor	Correlation over time

2.9.1. FLDCOR - Correlation of grid space

Synopsis

```
fldcor ifile1 ifile2 ofile
```

Description

The correlation coefficient is a quantity that gives the quality of a least squares fitting to the original data. This operator correlates all gridpoints of two fields for each timestep. With

$$S(t) = \{x, i_1(t, x) \neq \text{missval} \wedge i_2(t, x) \neq \text{missval}\}$$

it is

$$o(t, 1) = \frac{\sum_{x \in S(t)} i_1(t, x) i_2(t, x) w(x) - \overline{i_1(t, x)} \overline{i_2(t, x)} \sum_{x \in S(t)} w(x)}{\sqrt{\left(\sum_{x \in S(t)} i_1(t, x)^2 w(x) - \overline{i_1(t, x)}^2 \sum_{x \in S(t)} w(x) \right) \left(\sum_{x \in S(t)} i_2(t, x)^2 w(x) - \overline{i_2(t, x)}^2 \sum_{x \in S(t)} w(x) \right)}}$$

where $w(x)$ are the area weights obtained by the input stream. For every timestep t only those field elements x belong to the sample, which have $i_1(t, x) \neq \text{missval}$ and $i_2(t, x) \neq \text{missval}$.

2.9.2. TIMCOR - Correlation over time

Synopsis

```
timcor ifile1 ifile2 ofile
```

Description

The correlation coefficient is a quantity that gives the quality of a least squares fitting to the original data. This operator correlates each gridpoint of two fields over all timesteps. With

$$S(x) = \{t, i_1(t, x) \neq \text{missval} \wedge i_2(t, x) \neq \text{missval}\}$$

it is

$$o(1, x) = \frac{\sum_{t \in S(x)} i_1(t, x) i_2(t, x) - n \overline{i_1(t, x)} \overline{i_2(t, x)}}{\sqrt{\left(\sum_{t \in S(x)} i_1(t, x)^2 - n \overline{i_1(t, x)}^2 \right) \left(\sum_{t \in S(x)} i_2(t, x)^2 - n \overline{i_2(t, x)}^2 \right)}}$$

For every gridpoint x only those timesteps t belong to the sample, which have $i_1(t, x) \neq \text{missval}$ and $i_2(t, x) \neq \text{missval}$.

2.10. Regression

This sections contains modules for linear regression of time series.

Here is a short overview of all operators in this section:

regres	Regression
detrend	Detrend
trend	Trend
subtrend	Subtract trend

2.10.1. REGRES - Regression

Synopsis

```
regres ifile ofile
```

Description

The values of the input file `ifile` are assumed to be distributed as $N(a + bt, \sigma^2)$ with unknown a , b and σ^2 . This operator estimates the parameter b . For every field element x only those time steps t belong to the sample $S(x)$, which have $i(t, x) \neq \text{miss}$. It is

$$o(1, x) = \frac{\sum_{t \in S(x)} \left(i(t, x) - \frac{1}{\#S(x)} \sum_{t' \in S(x)} i(t', x) \right) \left(t - \frac{1}{\#S(x)} \sum_{t' \in S(x)} t' \right)}{\sum_{t \in S(x)} \left(t - \frac{1}{\#S(x)} \sum_{t' \in S(x)} t' \right)^2}$$

2.10.2. DETREND - Detrend time series

Synopsis

```
detrend ifile ofile
```

Description

Every time series in `ifile` is linearly detrended. For every field element x only those time steps t belong to the sample $S(x)$, which have $i(t, x) \neq \text{miss}$. With

$$a(x) = \frac{1}{\#S(x)} \sum_{t \in S(x)} i(t, x) - b(x) \left(\frac{1}{\#S(x)} \sum_{t \in S(x)} t \right)$$

and

$$b(x) = \frac{\sum_{t \in S(x)} \left(i(t, x) - \frac{1}{\#S(x)} \sum_{t' \in S(x)} i(t', x) \right) \left(t - \frac{1}{\#S(x)} \sum_{t' \in S(x)} t' \right)}{\sum_{t \in S(x)} \left(t - \frac{1}{\#S(x)} \sum_{t' \in S(x)} t' \right)^2}$$

it is

$$o(t, x) = i(t, x) - (a(x) + b(x)t)$$

Note

This operator has to keep the fields of all time steps concurrently in the memory. If not enough memory is available use the operators [trend](#) and [subtrend](#).

Example

To detrend the data in `ifile` and to store the detrended data in `ofile` use:

```
cdo detrend ifile ofile
```

2.10.3. TREND - Trend of time series

Synopsis

```
trend ifile ofile1 ofile2
```

Description

The values of the input file `ifile` are assumed to be distributed as $N(a + bt, \sigma^2)$ with unknown a , b and σ^2 . This operator estimates the parameter a and b . For every field element x only those time steps t belong to the sample $S(x)$, which have $i(t, x) \neq \text{miss}$. It is

$$o_1(1, x) = \frac{1}{\#S(x)} \sum_{t \in S(x)} i(t, x) - b(x) \left(\frac{1}{\#S(x)} \sum_{t \in S(x)} t \right)$$

and

$$o_2(1, x) = \frac{\sum_{t \in S(x)} \left(i(t, x) - \frac{1}{\#S(x)} \sum_{t' \in S(x)} i(t', x) \right) \left(t - \frac{1}{\#S(x)} \sum_{t' \in S(x)} t' \right)}{\sum_{t \in S(x)} \left(t - \frac{1}{\#S(x)} \sum_{t' \in S(x)} t' \right)^2}$$

Thus the estimation for a is stored in `ofile1` and that for b is stored in `ofile2`. To subtract the trend from the data see operator [subtrend](#).

2.10.4. SUBTREND - Subtract a trend

Synopsis

```
subtrend ifile1 ifile2 ifile3 ofile
```

Description

This operator is for subtracting a trend computed by the operator [trend](#). It is

$$o(t, x) = i_1(t, x) - (i_2(1, x) + i_3(1, x) \cdot t)$$

where t is the time steps.

Example

The typical call for detrending the data in `ifile` and storing the detrended data in `ofile` is:

```
cdo trend ifile afile bfile
cdo subtrend ifile afile bfile ofile
```

The result is identical to a call of the operator [detrend](#):

```
cdo detrend ifile ofile
```

2.11. EOFs

This section contains modules to compute Empirical Orthogonal Functions and - once they are computed - their principal coefficients.

An introduction to the theory of principal component analysis as applied here can be found in:

Principal Component Analysis [Peisendorfer]

Details about calculation in the time- and spatial spaces are found in:

Statistical Analysis in Climate Research [vonStorch]

EOFs are defined as the eigen values of the scatter matrix (covariance matrix) of the data. For the sake of simplicity, samples are regarded as **time series of anomalies**

$$(z(t)), t \in \{1, \dots, n\}$$

of (column-) vectors $z(t)$ with p entries (where p is the gridsize). Thus, using the fact, that $z_j(t)$ are anomalies, i.e.

$$\langle z_j \rangle = n^{-1} \sum_{i=1}^n z_j(i) = 0 \quad \forall 1 \leq j \leq p$$

the scatter matrix \mathbf{S} can be written as

$$\mathbf{S} = \sum_{t=1}^n \left[\sqrt{\mathbf{W}} z(t) \right] \left[\sqrt{\mathbf{W}} z(t) \right]^T$$

where \mathbf{W} is the diagonal matrix containing the area weight of cell p_0 in z at $\mathbf{W}(x, x)$.

The matrix \mathbf{S} has a set of orthonormal eigenvectors $e_j, j = 1, \dots, p$, which are called *empirical orthogonal functions (EOFs) of the sample z* . (Please note, that e_j is the eigenvector of \mathbf{S} and not the weighted eigen-vector which would be $\mathbf{W}e_j$.) Let the corresponding eigenvalues be denoted λ_j . The vectors e_j are spatial patterns which explain a certain amount of variance of the time series $z(t)$ that is related linearly to λ_j . Thus, the spatial pattern defined by the first eigenvector (the one with the largest eigenvalue) is the pattern which explains a maximum possible amount of variance of the sample $z(t)$. The orthonormality of eigenvectors reads as

$$\sum_{x=1}^p \left[\sqrt{\mathbf{W}(x, x)} e_j(x) \right] \left[\sqrt{\mathbf{W}(x, x)} e_k(x) \right] = \sum_{x=1}^p \mathbf{W}(x, x) e_j(x) e_k(x) = \begin{cases} 0 & \text{if } j \neq k \\ 1 & \text{if } j = k \end{cases}$$

If all EOFs e_j with $\lambda_j \neq 0$ are calculated, the data can be reconstructed from

$$z(t, x) = \sum_{j=1}^p \mathbf{W}(x, x) a_j(t) e_j(x)$$

where a_j are called the *principal components* or *principal coefficients* or *EOF coefficients* of z . These coefficients - as readily seen from above - are calculated as the projection of an EOF e_j onto a time step of the data sample $z(t_0)$ as

$$a_j(t_0) = \sum_{x=1}^p \left[\sqrt{\mathbf{W}(x, x)} e_j(x) \right] \left[\sqrt{\mathbf{W}(x, x)} z(t_0, x) \right] = \left[\sqrt{\mathbf{W}} z(t_0) \right]^T \left[\sqrt{\mathbf{W}} e_j \right].$$

Here is a short overview of all operators in this section:

eof	Calculate EOFs in spatial or time space
eoftime	Calculate EOFs in time space
eofspatial	Calculate EOFs in spatial space
eof3d	Calculate 3-Dimensional EOFs in time space
eofcoeff	Calculate principal coefficients of EOFs

2.11.1. EOFS - Empirical Orthogonal Functions

Synopsis

```
<operator>,neof ifile ofile1 ofile2
```

Description

This module calculates empirical orthogonal functions of the data in `ifile` as the eigen values of the scatter matrix (covariance matrix) S of the data sample $z(t)$. A more detailed description can be found above.

Please note, that the input data are assumed to be anomalies.

If operator `eof` is chosen, the EOFs are computed in either time or spatial space, whichever is the fastest. If the user already knows, which computation is faster, the module can be forced to perform a computation in time or gridspace by using the operators `eoftime` or `eofspatial`, respectively. This can enhance performance, especially for very long time series, where the number of time steps is larger than the number of grid-points. Data in `ifile` are assumed to be anomalies. If they are not, the behavior of this module is **not** well defined. After execution `ofile1` will contain the eigen-values and `ofile2` the eigenvectors e_j . Note, that the resulting EOF in `ofile2` is e_j and thus **not weighted** for consistency.

Missing values are not fully supported. Support is only checked for non-changing masks of missing values in time. Although there still will be results, they are not trustworthy, and a warning will occur. In the latter case we suggest to replace missing values by 0 in `ifile`.

Operators

<code>eof</code>	Calculate EOFs in spatial or time space
<code>eoftime</code>	Calculate EOFs in time space
<code>eofspatial</code>	Calculate EOFs in spatial space
<code>eof3d</code>	Calculate 3-Dimensional EOFs in time space

Parameter

<code>neof</code>	INTEGER	Number of eigen functions
-------------------	---------	---------------------------

Environment

<code>CDO_SVD_MODE</code>	Is used to choose the algorithm for eigenvalue calculation. Options are 'jacobi' for a one-sided parallel jacobi-algorithm (only executed in parallel if -P flag is set) and 'danielson_lanczos' for a non-parallel d/l algorithm. The default setting is 'jacobi'.
<code>MAX_JACOBI_ITER</code>	Is the maximum integer number of annihilation sweeps that is executed if the jacobi-algorithm is used to compute the eigen values. The default value is 5.
<code>FNORM_PRECISION</code>	Is the Frobenius norm of the matrix consisting of an annihilation pair of eigenvectors that is used to determine if the eigenvectors have reached a sufficient level of convergence. If all annihilation-pairs of vectors have a norm below this value, the computation is considered to have converged properly. Otherwise, a warning will occur. The default value 1e-05.

Example

To calculate the first 40 EOFs of a data-set containing anomalies use:

```
cdo eof,40 ifile ofile1 ofile2
```

If the dataset does not contain anomalies, process them first, and use:

```
cdo sub ifile1 -timmean ifile1 anom_file  
cdo eof,40 anom_file ofile1 ofile2
```

2.11.2. EOFCOEFF - Principal coefficients of EOFs

Synopsis

```
eofcoeff ifile1 ifile2 obase
```

Description

This module calculates the time series of the principal coefficients for given EOF (empirical orthogonal functions) and data. Time steps in `ifile1` are assumed to be the EOFs, Time steps in `ifile2` are assumed to be the time series. Weights are taken into account, which is why EOF output is **not** weighted. Note, that this operator calculates a weighted dot product of the fields in `ifile1` and `ifile2`. Given a set of EOFs e_j and a time series of data $z(t)$ with p entries for each time step from which e_j have been calculated, this operator calculates the time series of the projections of data onto each EOF

$$o_j(t) = \sum_{x=1}^p W(x, x) z(t, x) e_j(x)$$

where W is the diagonal matrix containing area weights as above. There will be a separate file o_j for the principal coefficients of each EOF.

As the EOFs e_j are uncorrelated, so are their principal coefficients, i.e.

$$\sum_{t=1}^n o_j(t) o_k(t) = \begin{cases} 0 & \text{if } j \neq k \\ \lambda_j & \text{if } j = k \end{cases} \quad \text{with } \sum_{t=1}^n o_j(t) = 0 \forall j \in \{1, \dots, p\}.$$

There will be a separate file containing a time series of principal coefficients with time information from `ifile2` for each EOF in `ifile1`. Output files will be numbered as `<obase><neof><suffix>` where `neof+1` is the number of the EOF (time step) in `ifile1` and `suffix` is the filename extension derived from the file format.

Environment

`CDO_FILE_SUFFIX` This environment variable can be used to set the default file suffix. This suffix will be added to the output file names instead of the filename extension derived from the file format. Set this variable to `NULL` to disable the adding of a file suffix.

Example

To calculate principal coefficients of the first 40 EOFs of `anom_file`, and write them to files beginning with `obase`, use:

```
cdo eof,40 anom_file eval_file eof_file
cdo eofcoeff eof_file anom_file obase
```

The principal coefficients of the first EOF will be in the file `obase000000.nc` (and so forth for higher EOFs, n th EOF will be in `obase<n-1>`).

If the dataset `ifile` does not contain anomalies, process them first, and use:

```
cdo sub ifile -timmean ifile anom_file
cdo eof,40 anom_file eval_file eof_file
cdo eofcoeff eof_file anom_file obase
```


2.12. Interpolation

This section contains modules to interpolate datasets. There are several operators to interpolate horizontal fields to a new grid. Some of those operators can handle only 2D fields on a regular rectangular grid. Vertical interpolation of 3D variables is possible from hybrid model levels to height or pressure levels. Interpolation in time is possible between time steps and years.

Here is a short overview of all operators in this section:

remapbil	Bilinear interpolation
remapbic	Bicubic interpolation
remapdis	Distance-weighted average remapping
remapnn	Nearest neighbor remapping
remapcon	First order conservative remapping
remapcon2	Second order conservative remapping
remaplaf	Largest area fraction remapping
genbil	Generate bilinear interpolation weights
genbic	Generate bicubic interpolation weights
gendis	Generate distance-weighted average remap weights
gennn	Generate nearest neighbor remap weights
gencon	Generate 1st order conservative remap weights
gencon2	Generate 2nd order conservative remap weights
genlaf	Generate largest area fraction remap weights
remap	SCRIP grid remapping
remapeta	Remap vertical hybrid level
ml2pl	Model to pressure level interpolation
ml2hl	Model to height level interpolation
intlevel	Linear level interpolation
inttime	Interpolation between time steps
intntime	Interpolation between time steps
intyear	Interpolation between two years

2.12.1. REMAPGRID - SCRIP grid interpolation

Synopsis

```
<operator>,grid ifile ofile
```

Description

This module contains operators to remap all input fields to a new horizontal grid. Each operator uses a different remapping method. The interpolation is based on an adapted SCRIP library version. For a detailed description of the remapping methods see [\[SCRIP\]](#).

Operators

remapbil	Bilinear interpolation Performs a bilinear interpolation on all input fields. This interpolation method only works on quadrilateral curvilinear grids.
remapbic	Bicubic interpolation Performs a bicubic interpolation on all input fields. This interpolation method only works on quadrilateral curvilinear grids.
remapdis	Distance-weighted average remapping Performs a distance-weighted average remapping of the four nearest neighbor values on all input fields.
remapnn	Nearest neighbor remapping Performs a nearest neighbor remapping on all input fields.
remapcon	First order conservative remapping Performs a first order conservative remapping on all input fields.
remapcon2	Second order conservative remapping Performs a second order conservative remapping on all input fields.
remaplaf	Largest area fraction remapping Performs a largest area fraction remapping on all input fields.

Parameter

grid STRING Target grid description file or name

Environment

NORMALIZE_OPT	This variable is used to choose the normalization of the conservative remapping. By default NORMALIZE_OPT is set to 'fracarea' and will include the destination area fraction in the output weights; other options are 'none' and 'destarea' (for more information see [SCRIP]).
REMAP_EXTRAPOLATE	This variable is used to switch the extrapolation feature 'on' or 'off'. By default the extrapolation is enabled for remapdis, remapnn and for circular grids.

Note

For this module the author has converted the original Fortran 90 SCRIP software to ANSI C99. If there are any problems send a bug report to CDO and not to SCRIP!

Example

Say `ifile` contains fields on a quadrilateral curvilinear grid. To remap all fields bilinear to a Gaussian N32 grid, type:

```
cdo remapbil,n32 ifile ofile
```

2.12.2. GENWEIGHTS - Generate SCRIP grid interpolation weights

Synopsis

```
<operator>,grid ifile ofile
```

Description

Interpolation between different horizontal grids can be a very time-consuming process. Especially if the data are on an unstructured or a large grid. In this case the [SCRIP](#) interpolation process can be split into two parts. Firstly the generation of the interpolation weights, which is the most time-consuming part. These interpolation weights can be reused for every remapping process with the operator [remap](#). This method should be used only if all input fields are on the same grid and a possibly mask (missing values) does not change. This module contains operators to generate SCRIP interpolation weights of the first input field. Each operator is using a different interpolation method.

Operators

genbil	Generate bilinear interpolation weights Generates bilinear interpolation weights and writes the result to a file. This interpolation method only works on quadrilateral curvilinear grids.
genbic	Generate bicubic interpolation weights Generates bicubic interpolation weights and writes the result to a file. This interpolation method only works on quadrilateral curvilinear grids.
gendis	Generate distance-weighted average remap weights Generates distance-weighted average remapping weights of the four nearest neighbor values and writes the result to a file.
gennn	Generate nearest neighbor remap weights Generates nearest neighbor remapping weights and writes the result to a file.
gencon	Generate 1st order conservative remap weights Generates first order conservative remapping weights and writes the result to a file.
gencon2	Generate 2nd order conservative remap weights Generates second order conservative remapping weights and writes the result to a file.
genlaf	Generate largest area fraction remap weights Generates largest area fraction remapping weights and writes the result to a file.

Parameter

<i>grid</i>	STRING	Target grid description file or name
-------------	--------	--------------------------------------

Environment

NORMALIZE_OPT	This variable is used to choose the normalization of the conservative interpolation. By default NORMALIZE_OPT is set to 'fracarea' and will include the destination area fraction in the output weights; other options are 'none' and 'destarea' (for more information see [SCRIP]).
REMAP_EXTRAPOLATE	This variable is used to switch the extrapolation feature 'on' or 'off'. By default the extrapolation is enabled for remapdis, remapnn and for circular grids.

Note

For this module the author has converted the original Fortran 90 SCRIP software to ANSI C99. If there are any problems send a bug report to CDO and not to SCRIP!

Example

Say `ifile` contains fields on a quadrilateral curvilinear grid. To remap all fields bilinear to a Gaussian N32 grid use:

```
cdo genbil,n32 ifile remapweights.nc  
cdo remap,n32,remapweights.nc ifile ofile
```

2.12.3. REMAP - SCRIP grid remapping

Synopsis

```
remap,grid,weights ifile ofile
```

Description

This operator remaps all input fields to a new horizontal grid. The remap type and the interpolation weights of one input grid are read from a netCDF file. More weights are computed if the input fields are on different grids. The netCDF file with the weights should follow the [SCRIP](#) convention. Normally these weights come from a previous call to module [GENWEIGHTS](#) or were created by the original SCRIP package.

Parameter

<i>grid</i>	STRING	Target grid description file or name
<i>weights</i>	STRING	Interpolation weights (SCRIP netCDF file)

Environment

NORMALIZE_OPT	This variable is used to choose the normalization of the conservative interpolation. By default NORMALIZE_OPT is set to 'fracarea' and will include the destination area fraction in the output weights; other options are 'none' and 'destarea' (for more information see [SCRIP]).
REMAP_EXTRAPOLATE	This variable is used to switch the extrapolation feature 'on' or 'off'. By default the extrapolation is enabled for remapdis, remapnn and for circular grids.

Note

For this module the author has converted the original Fortran 90 SCRIP software to ANSI C99. If there are any problems send a bug report to CDO and not to SCRIP!

Example

Say *ifile* contains fields on a quadrilateral curvilinear grid. To remap all fields bilinear to a Gaussian N32 grid use:

```
cdo genbil,n32 ifile remapweights.nc
cdo remap,n32,remapweights.nc ifile ofile
```

The result will be the same as:

```
cdo remapbil,n32 ifile ofile
```

2.12.4. REMAPETA - Remap vertical hybrid level

Synopsis

```
remapeta,vct[,oro] ifile ofile
```

Description

This operator interpolates between different vertical hybrid levels. This include the preparation of consistent data for the free atmosphere. The procedure for the vertical interpolation is based on the HIRLAM scheme and was adapted from [\[INTERA\]](#). The vertical interpolation is based on the vertical integration of the hydrostatic equation with few adjustments. The basic tasks are the following one:

- at first integration of hydrostatic equation
- extrapolation of surface pressure
- Planetary Boundary-Layer (PBL) profile interpolation
- interpolation in free atmosphere
- merging of both profiles
- final surface pressure correction

The vertical interpolation corrects the surface pressure. This is simply a cut-off or an addition of air mass. This mass correction should not influence the geostrophic velocity field in the middle troposphere. Therefore the total mass above a given reference level is conserved. As reference level the geopotential height of the 500 hPa level is used. Near the surface the correction can affect the vertical structure of the PBL. Therefore the interpolation is done using the potential temperature. But in the free atmosphere above a certain n ($n=0.8$ defining the top of the PBL) the interpolation is done linearly. After the interpolation both profiles are merged. With the resulting temperature/pressure correction the hydrostatic equation is integrated again and adjusted to the reference level finding the final surface pressure correction. A more detailed description of the interpolation can be found in [\[INTERA\]](#). All input fields have to be on the same horizontal grid.

Parameter

<i>vct</i>	STRING	File name of an ASCII dataset with the vertical coordinate table
<i>oro</i>	STRING	File name with the orography (surf. geopotential) of the target dataset (optional)

Note

The code numbers or the variable names of the required parameter have to follow the [\[ECHAM\]](#) convention. Presently, the vertical coordinate definition of a netCDF file has also to follow the ECHAM convention. This means:

- the dimension of the full level coordinate and the corresponding variable is called mlev,
- the dimension of the half level coordinate and the corresponding variable is called ilev (ilev must have one element more than mlev)
- the hybrid vertical coefficient a is given in units of Pa and called hyai (hyam for level midpoints)
- the hybrid vertical coefficient b is given in units of 1 and called hybi (hybm for level midpoints)
- the mlev variable has a borders attribute containing the character string 'ilev'

Use the [sinfo](#) command to test if your vertical coordinate system is recognized as hybrid system. In case [remapeta](#) complains about not finding any data on hybrid model levels you may wish to use the [setzaxis](#) command to generate a zaxis description which conforms to the ECHAM convention. See section "1.4 Z-axis description" for an example how to define a hybrid Z-axis.

Example

To remap between different hybrid model level data use:

```
cdo remapeta,vct ifile ofile
```

Here is an example vct file with 19 hybrid model level:

0	0.000000000000000000	0.000000000000000000
1	2000.0000000000000000	0.000000000000000000
2	4000.0000000000000000	0.000000000000000000
3	6046.1093750000000000	0.00033899326808751
4	8267.9296875000000000	0.00335718691349030
5	10609.5117187500000000	0.01307003945112228
6	12851.1015625000000000	0.03407714888453484
7	14698.5000000000000000	0.07064980268478394
8	15861.1289062500000000	0.12591671943664551
9	16116.2382812500000000	0.20119541883468628
10	15356.9218750000000000	0.29551959037780762
11	13621.4609375000000000	0.40540921688079834
12	11101.5585937500000000	0.52493220567703247
13	8127.1445312500000000	0.64610791206359863
14	5125.1406250000000000	0.75969839096069336
15	2549.9689941406250000	0.85643762350082397
16	783.1950683593750000	0.92874687910079956
17	0.000000000000000000	0.97298520803451538
18	0.000000000000000000	0.99228149652481079
19	0.000000000000000000	1.000000000000000000

2.12.5. INTVERT - Vertical interpolation

Synopsis

```
ml2pl,plevels ifile ofile
```

```
ml2hl,hlevels ifile ofile
```

Description

Interpolate 3D variables on hybrid model levels to pressure or height levels. The input file should contain the log. surface pressure or the surface pressure. To interpolate the temperature, the orography (surface geopotential) is also needed. The pressure, temperature, and orography are identified by their code numbers. Supported parameter tables are: WMO standard table number 2 and ECMWF local table number 128. Use the alias **ml2plx/ml2hlx** or the environment variable **EXTRAPOLATE** to extrapolate missing values. All input fields have to be on the same horizontal grid.

Operators

- ml2pl** Model to pressure level interpolation
Interpolates 3D variables on hybrid model levels to pressure levels.
- ml2hl** Model to height level interpolation
Interpolates 3D variables on hybrid model levels to height levels. The procedure is the same as for the operator [mh2pl](#) except for the pressure levels being calculated from the heights by: $p_{level} = 101325 * \exp(h_{level} / -7000)$

Parameter

<i>plevels</i>	FLOAT	Pressure levels in pascal
<i>hlevels</i>	FLOAT	Height levels in meter (max level: 65535 m)

Environment

EXTRAPOLATE If set to 1 extrapolate missing values.

Note

The netCDF CF convention for vertical hybrid coordinates is not supported, yet!

Example

To interpolate hybrid model level data to pressure levels of 925, 850, 500 and 200 hPa use:

```
cdo ml2pl,92500,85000,50000,20000 ifile ofile
```

2.12.6. INTLEVEL - Linear level interpolation

Synopsis

```
intlevel,levels ifile ofile
```

Description

This operator performs a linear vertical interpolation of non hybrid 3D variables.

Parameter

<i>levels</i>	FLOAT	Target levels
---------------	-------	---------------

Example

To interpolate 3D variables on height levels to a new set of height levels use:

```
cdo intlevel,10,50,100,500,1000 ifile ofile
```

2.12.7. INTTIME - Time interpolation

Synopsis

```
inttime,date,time[,inc] ifile ofile
intntime,n ifile ofile
```

Description

This module performs linear interpolation between time steps.

Operators

inttime	Interpolation between time steps This operator creates a new dataset by linear interpolation between time steps. The user has to define the start date/time with an optional increment.
intntime	Interpolation between time steps This operator performs linear interpolation between time steps. The user has to define the number of time steps from one time step to the next.

Parameter

<i>date</i>	STRING	Start date (format YYYY-MM-DD)
<i>time</i>	STRING	Start time (format hh:mm:ss)
<i>inc</i>	STRING	Optional increment (seconds, minutes, hours, days, months, years) [default: 0hour]
<i>n</i>	INTEGER	Number of time steps from one time step to the next

Example

Assumed a 6 hourly dataset starts at 1987-01-01 12:00:00. To interpolate this time series to a one hourly dataset use:

```
cdo inttime,1987-01-01,12:00:00,1hour ifile ofile
```

2.12.8. INTYEAR - Year interpolation

Synopsis

```
intyear,years ifile1 ifile2 obase
```

Description

This operator performs linear interpolation between two years, time step by time step. The output files will be named `<obase><yyyy><suffix>` where `yyyy` will be the year and `suffix` is the filename extension derived from the file format.

Parameter

<code>years</code>	INTEGER	Comma separated list of years
--------------------	---------	-------------------------------

Environment

<code>CDO_FILE_SUFFIX</code>	This environment variable can be used to set the default file suffix. This suffix will be added to the output file names instead of the filename extension derived from the file format. Set this variable to NULL to disable the adding of a file suffix.
------------------------------	--

Example

Assume there are two monthly mean datasets over a year. The first dataset has 12 time steps for the year 1985 and the second one for the year 1990. To interpolate the years between 1985 and 1990 month by month use:

```
cdo intyear,1986,1987,1988,1989 ifile1 ifile2 year
```

Example result of `'dir year*'` for netCDF datasets:

```
year1986.nc year1987.nc year1988.nc year1989.nc
```

2.13. Transformation

This section contains modules to perform spectral transformations.

Here is a short overview of all operators in this section:

sp2gp	Spectral to gridpoint
sp2gpl	Spectral to gridpoint (linear)
gp2sp	Gridpoint to spectral
gp2spl	Gridpoint to spectral (linear)
sp2sp	Spectral to spectral
dv2uv	Divergence and vorticity to U and V wind
dv2uwl	Divergence and vorticity to U and V wind (linear)
uv2dv	U and V wind to divergence and vorticity
uv2dwl	U and V wind to divergence and vorticity (linear)
dv2ps	D and V to velocity potential and stream function

2.13.1. SPECTRAL - Spectral transformation

Synopsis

```
sp2gp ifile ofile

sp2gpl ifile ofile

gp2sp ifile ofile

gp2spl ifile ofile

sp2sp, trunc ifile ofile
```

Description

This module transforms fields on Gaussian grids to spectral coefficients and vice versa.

Operators

sp2gp	<p>Spectral to gridpoint</p> <p>Convert all fields with spectral coefficients to a regular Gaussian grid. The number of latitudes of the resulting Gaussian grid is calculated from the triangular truncation by:</p> $nlat = NINT((trunc * \boxed{3} + 1.) / 2.)$
sp2gpl	<p>Spectral to gridpoint (linear)</p> <p>Convert all fields with spectral coefficients to a regular Gaussian grid. The number of latitudes of the resulting Gaussian grid is calculated from the triangular truncation by:</p> $nlat = NINT((trunc * \boxed{2} + 1.) / 2.)$ <p>Use this operator to convert ERA40 data e.g. from TL159 to N80.</p>
gp2sp	<p>Gridpoint to spectral</p> <p>Convert all Gaussian gridpoint fields to spectral coefficients. The triangular truncation of the resulting spherical harmonics is calculated from the number of latitudes by:</p> $trunc = (nlat * 2 - 1) / \boxed{3}$
gp2spl	<p>Gridpoint to spectral (linear)</p> <p>Convert all Gaussian gridpoint fields to spectral coefficients. The triangular truncation of the resulting spherical harmonics is calculated from the number of latitudes by:</p> $trunc = (nlat * 2 - 1) / \boxed{2}$ <p>Use this operator to convert ERA40 data e.g. from N80 to TL159 instead of T106.</p>
sp2sp	<p>Spectral to spectral</p> <p>Change the triangular truncation of all spectral fields. The operator performs downward conversion by cutting the resolution. Upward conversions are achieved by filling in zeros.</p>

Parameter

<i>trunc</i>	INTEGER	New spectral resolution
<i>wnums</i>	INTEGER	Comma separated list of wave numbers

Example

To transform spectral coefficients from T106 to N80 Gaussian grid use:

```
cdo sp2gp ifile ofile
```

To transform spectral coefficients from TL159 to N80 Gaussian grid use:

```
cdo sp2gpl ifile ofile
```

2.13.2. WIND - Wind transformation

Synopsis

```
<operator> ifile ofile
```

Description

This module converts relative divergence and vorticity to U and V wind and vice versa.

Operators

- dv2uv** Divergence and vorticity to U and V wind
Calculate U and V wind on a Gaussian grid from spherical harmonic coefficients of relative divergence and vorticity. The divergence and vorticity need to have the names sd and svo or code numbers 155 and 138. The number of latitudes of the resulting Gaussian grid is calculated from the triangular truncation by:
$$nlat = NINT((trunc * \boxed{3} + 1.) / 2.)$$
- dv2uyl** Divergence and vorticity to U and V wind (linear)
Calculate U and V wind on a Gaussian grid from spherical harmonic coefficients of relative divergence and vorticity. The divergence and vorticity need to have the names sd and svo or code numbers 155 and 138. The number of latitudes of the resulting Gaussian grid is calculated from the triangular truncation by:
$$nlat = NINT((trunc * \boxed{2} + 1.) / 2.)$$
- uv2dv** U and V wind to divergence and vorticity
Calculate spherical harmonic coefficients of relative divergence and vorticity from U and V wind. The U and V wind need to have the names u and v or the code numbers 131 and 132. The triangular truncation of the resulting spherical harmonics is calculated from the number of latitudes by:
$$trunc = (nlat * 2 - 1) / \boxed{3}$$
- uv2dyl** U and V wind to divergence and vorticity (linear)
Calculate spherical harmonic coefficients of relative divergence and vorticity from U and V wind. The U and V wind need to have the names u and v or the code numbers 131 and 132. The triangular truncation of the resulting spherical harmonics is calculated from the number of latitudes by:
$$trunc = (nlat * 2 - 1) / \boxed{2}$$
- dv2ps** D and V to velocity potential and stream function
Calculate spherical harmonic coefficients of velocity potential and stream function from spherical harmonic coefficients of relative divergence and vorticity. The divergence and vorticity need to have the names sd and svo or code numbers 155 and 138.

Example

Assume a dataset has at least spherical harmonic coefficients of divergence and vorticity. To transform the spectral divergence and vorticity to U and V wind use:

```
cdo dv2uv ifile ofile
```


2.14. Import/Export

This section contains modules to import and export data files which can not read or write directly with CDO.

Here is a short overview of all operators in this section:

import_binary	Import binary data sets
import_cmsaf	Import CM-SAF HDF5 files
import_amsr	Import AMSR binary files
input	ASCII input
inputsrv	SERVICE ASCII input
inputtext	EXTRA ASCII input
output	ASCII output
outputf	Formatted output
outputint	Integer output
outputsrv	SERVICE ASCII output
outputtext	EXTRA ASCII output

2.14.1. IMPORTBINARY - Import binary data sets

Synopsis

```
import_binary ifile ofile
```

Description

This operator imports gridded binary data sets via a GrADS data descriptor file. The GrADS data descriptor file contains a complete description of the binary data as well as instructions on where to find the data and how to read it. The descriptor file is an ASCII file that can be created easily with a text editor. The general contents of a gridded data descriptor file are as follows:

- Filename for the binary data
- Missing or undefined data value
- Mapping between grid coordinates and world coordinates
- Description of variables in the binary data set

A detailed description of the components of a GrADS data descriptor file can be found in [\[GrADS\]](#). Here is a list of the supported components: BYTESWAPPED, CHSUB, DSET, ENDVARS, FILEHEADER, HEADERBYTES, OPTIONS, TDEF, TITLE, TRAILERBYTES, UNDEF, VARS, XDEF, XYHEADER, YDEF, ZDEF

Example

To convert a binary data file to netCDF use:

```
cdo -f nc import_binary ifile.ctl ofile.nc
```

Here is an example of a GrADS data descriptor file:

```
DSET ^ ifile .bin
OPTIONS sequential
UNDEF -9e+33
XDEF 360 LINEAR -179.5 1
YDEF 180 LINEAR -89.5 1
ZDEF 1 LINEAR 1 1
TDEF 1 LINEAR 00:00 Z15jun1989 12hr
VARS 1
param 1 99 description of the variable
ENDVARS
```

The binary data file ifile.bin contains one parameter on a global 1 degree lon/lat grid written with FORTRAN record length headers (sequential).

2.14.2. IMPORTCMSAF - Import CM-SAF HDF5 files

Synopsis

```
import_cmsaf ifile ofile
```

Description

This operator imports gridded CM-SAF (Satellite Application Facility on Climate Monitoring) HDF5 files. CM-SAF exploits data from polar-orbiting and geostationary satellites in order to provide climate monitoring products of the following parameters:

Cloud parameters: cloud fraction (CFC), cloud type (CTY), cloud phase (CPH), cloud top height, pressure and temperature (CTH,CTP,CTT), cloud optical thickness (COT), cloud water path (CWP).

Surface radiation components: Surface albedo (SAL); surface incoming (SIS) and net (SNS) shortwave radiation; surface downward (SDL) and outgoing (SOL) longwave radiation, surface net longwave radiation (SNL) and surface radiation budget (SRB).

Top-of-atmosphere radiation components: Incoming (TIS) and reflected (TRS) solar radiative flux at top-of-atmosphere. Emitted thermal radiative flux at top-of-atmosphere (TET).

Water vapour: Vertically integrated water vapour (HTW), layered vertically integrated water vapour and layer mean temperature and relative humidity for 5 layers (HLW), temperature and mixing ratio at 6 pressure levels.

Daily and monthly mean products can be ordered via the CM-SAF web page (www.cmsaf.eu). Products with higher spatial and temporal resolution, i.e. instantaneous swath-based products, are available on request (contact.cmsaf@dwd.de). All products are distributed free-of-charge. More information on the data is available on the CM-SAF homepage (www.cmsaf.eu).

Daily and monthly mean products are provided in equal-area projections. CDO reads the projection parameters from the metadata in the HDF5-headers in order to allow spatial operations like remapping. For spatial operations with instantaneous products on original satellite projection, additional files with arrays of latitudes and longitudes are needed. These can be obtained from CM-SAF together with the data.

Note

To use this operator, it is necessary to build CDO with HDF5 support (version 1.6 or higher). The PROJ.4 library (version 4.6 or higher) is needed for full support of the remapping functionality.

Example

A typical sequence of commands with this operator could look like this:

```
cdo -f nc remapbil,r360x180 -import_cmsaf cmsaf_product.hdf output.nc
```

(bilinear remapping to a predefined global grid with 1 deg resolution and conversion to netcdf).

If you work with CM-SAF data on original satellite project, an additional file with information on geolocation is required, to perform such spatial operations:

```
cdo -f nc remapbil,r720x360 -setgrid,cmsaf_latlon.h5 -import_cmsaf cmsaf.hdf output.nc
```

Some CM-SAF data are stored as scaled integer values. For some operations, it could be desirable (or necessary) to increase the accuracy of the converted products:

```
cdo -b f32 -f nc fldmean -sellonlatbox,0,10,0,10 -remapbil,r720x360 \  
-import_cmsaf cmsaf_product.hdf output.nc
```

2.14.3. IMPORTAMSR - Import AMSR binary files

Synopsis

```
import_amsr ifile ofile
```

Description

This operator imports gridded binary AMSR (Advanced Microwave Scanning Radiometer) data. The binary data files are available from the AMSR ftp site (<ftp://ftp.ssmi.com/amsre>). Each file consists of twelve (daily) or five (averaged) 0.25 x 0.25 degree grid (1440,720) byte maps. For daily files, six daytime maps in the following order, Time (UTC), Sea Surface Temperature (SST), 10 meter Surface Wind Speed (WSPD), Atmospheric Water Vapor (VAPOR), Cloud Liquid Water (CLOUD), and Rain Rate (RAIN), are followed by six nighttime maps in the same order. Time-Averaged files contain just the geophysical layers in the same order [SST, WSPD, VAPOR, CLOUD, RAIN]. More information to the data is available on the AMSR homepage <http://www.remss.com/amsr>.

Example

To convert monthly binary AMSR files to netCDF use:

```
cdo -f nc amsre_yyyymm5 amsre_yyyymm5.nc
```

2.14.4. INPUT - Formatted input

Synopsis

`input,grid ofile`

`inputsrv ofile`

`inputtext ofile`

Description

This module reads time series of one 2D variable from standard input. All input fields need to have the same horizontal grid. The format of the input depends on the chosen operator.

Operators

input	ASCII input Reads fields with ASCII numbers from standard input and stores them in <code>ofile</code> . The numbers read are exactly that ones which are written out by output .
inputsrv	SERVICE ASCII input Reads fields with ASCII numbers from standard input and stores them in <code>ofile</code> . Each field should have a header of 8 integers (SERVICE likely). The numbers that are read are exactly that ones which are written out by outputsrv .
inputtext	EXTRA ASCII input Read fields with ASCII numbers from standard input and stores them in <code>ofile</code> . Each field should have header of 4 integers (EXTRA likely). The numbers read are exactly that ones which are written out by outputtext .

Parameter

`grid` **STRING** Grid description file or name

Example

Assume an ASCII dataset contains a field on a global regular grid with 32 longitudes and 16 latitudes (512 elements). To create a GRIB1 dataset from the ASCII dataset use:

```
cdo -f grb input,r32x16 ofile.grb < my_ascii_data
```

2.14.5. OUTPUT - Formatted output

Synopsis

output ifiles

outputf,*format*,*nelem* ifiles

outputint ifiles

outputsrv ifiles

outputtext ifiles

Description

This module prints all values of all input datasets to standard output. All input fields need to have the same horizontal grid. All input files need to have the same structure with the same variables. The format of the output depends on the chosen operator.

Operators

output	ASCII output Prints all values to standard output. Each row has 6 elements with the C-style format "%13.6g".
outputf	Formatted output Prints all values to standard output. The format and number of elements for each row have to be specified by the parameters <i>format</i> and <i>nelem</i> .
outputint	Integer output Prints all values rounded to the nearest integer to standard output.
outputsrv	SERVICE ASCII output Prints all values to standard output. Each field with a header of 8 integers (SERVICE likely).
outputtext	EXTRA ASCII output Prints all values to standard output. Each field with a header of 4 integers (EXTRA likely).

Parameter

<i>format</i>	STRING	C-style format for one element (e.g. %13.6g)
<i>nelem</i>	INTEGER	Number of elements for each row (nelem max = gridsizes)

Example

To print all field elements of a dataset formatted with "%8.4g" and 8 values per line use:

```
cdo outputf,%8.4g,8 ifile
```

Example result of a dataset with one field on 64 grid points:

261.7	262	257.8	252.5	248.8	247.7	246.3	246.1
250.6	252.6	253.9	254.8	252	246.6	249.7	257.9
273.4	266.2	259.8	261.6	257.2	253.4	251	263.7
267.5	267.4	272.2	266.7	259.6	255.2	272.9	277.1
275.3	275.5	276.4	278.4	282	269.6	278.7	279.5
282.3	284.5	280.3	280.3	280	281.5	284.7	283.6
292.9	290.5	293.9	292.6	292.7	292.8	294.1	293.6
293.8	292.6	291.2	292.6	293.2	292.8	291	291.2

2.15. Miscellaneous

This section contains miscellaneous modules which do not fit to the other sections before.

Here is a short overview of all operators in this section:

gradsdes1	GrADS data descriptor file (version 1 GRIB map)
gradsdes2	GrADS data descriptor file (version 2 GRIB map)
bandpass	Bandpass filtering
lowpass	Lowpass filtering
highpass	Highpass filtering
gridarea	Grid cell area
gridweights	Grid cell weights
smooth9	9 point smoothing
setvals	Set list of old values to new values
setrtoc	Set range to constant
setrtoc2	Set range to constant others to constant2
timsort	Sort over the time
const	Create a constant field
random	Create a field with random numbers
rotuvb	Backward rotation
mastrfu	Mass stream function
histcount	Histogram count
histsum	Histogram sum
histmean	Histogram mean
histfreq	Histogram frequency
sethalo	Set the left and right bounds of a field
wct	Windchill temperature
fdns	Frost days where no snow index per time period
strwin	Strong wind days index per time period
strbre	Strong breeze days index per time period
strgal	Strong gale days index per time period
hurr	Hurricane days index per time period

2.15.1. GRADSDES - GrADS data descriptor file

Synopsis

`<operator> ifile`

Description

Creates a [GrADS](#) data descriptor file. Supported file formats are GRIB1, SERVICE, EXTRA and IEG. For GRIB1 files the GrADS map file is also generated. For SERVICE and EXTRA files the grid have to be specified with the CDO option '-g <grid>'. This module takes `ifile` in order to create filenames for the descriptor (`ifile.ct1`) and the map (`ifile.gmp`) file. "gradsdes" is an alias for [gradsdes2](#).

Operators

- | | |
|------------------|---|
| gradsdes1 | GrADS data descriptor file (version 1 GRIB map)
Creates a GrADS data descriptor file. Generated a machine specific version 1 GrADS map file for GRIB1 datasets. |
| gradsdes2 | GrADS data descriptor file (version 2 GRIB map)
Creates a GrADS data descriptor file. Generated a machine independent version 2 GrADS map file for GRIB1 datasets. This map file can be used only with GrADS version 1.8 or newer. |

Example

To create a GrADS data descriptor file from a GRIB1 dataset use:

```
cdo gradsdes2 ifile.grb
```

This will create a descriptor file with the name `ifile.ct1` and the map file `ifile.gmp`. Assumed the input GRIB1 dataset has 3 variables over 12 time steps on a Gaussian N16 grid. The contents of the resulting GrADS data description file is approximately:

```
DSET  ^ifile.grb
DTYPE  GRIB
INDEX  ^ifile.gmp
XDEF 64 LINEAR 0.000000 5.625000
YDEF 32 LEVELS -85.761 -80.269 -74.745 -69.213 -63.679 -58.143
          -52.607 -47.070 -41.532 -35.995 -30.458 -24.920
          -19.382 -13.844 -8.307 -2.769 2.769 8.307
          13.844 19.382 24.920 30.458 35.995 41.532
          47.070 52.607 58.143 63.679 69.213 74.745
          80.269 85.761
ZDEF 4 LEVELS 925 850 500 200
TDEF 12 LINEAR 12:00 Z1jan1987 1mo
TITLE  ifile.grb T21 grid
OPTIONS yrev
UNDEF -9e+33
VARS 3
geosp 0 129,1,0 surface geopotential (orography) [m^2/s^2]
t      4 130,99,0 temperature [K]
tslm1 0 139,1,0 surface temperature of land [K]
ENDVARS
```

2.15.2. FILTER - Time series filtering

Synopsis

```
bandpass,fmin,fmax ifile ofile
lowpass,fmax ifile ofile
highpass,fmin ifile ofile
```

Description

This module takes the time series for each gridpoint in `ifile` and fills it with zeros (zero- padding) up to the next time-step-number that is a power of 2. Then it (fast fourier) transforms the time series with 2^n elements into the frequency domain. According to the particular operator and its parameters certain frequencies are filtered (set to zero) in the frequency domain and the spectrum is (inverse fast fourier) transformed back into the time domain. This time series is cut to the original number of timesteps from `ifile` and written to `ofile`. To determine the frequency the time-axis of `ifile` is used. (Data should have a constant time increment since this assumption applies for transformation. However, the time increment has to be different from zero.) All frequencies given as parameter are interpreted per year. This is done by the assumption of a 365-day calendar. Consequently if you want to perform multiyear-filtering accurately you have to delete the 29th of February. If your `ifile` has a 360 year calendar the frequency parameters `fmin` respectively `fmax` should be multiplied with a factor of 360/365 in order to obtain accurate results. For the set up of a frequency filter the frequency parameters have to be adjusted to a frequency in the data. Here `fmin` is rounded down and `fmax` is always rounded up. Consequently it is possible to use `bandpass` with `fmin=fmax` without getting a zero-field for `ofile`. Hints for efficient usage:

- to avoid effects of zero-padding cut or extend your time series down/up to the nearest power of two
- to get reliable results the time-series has to be detrended (`cdo detrend`)
- the lowest frequency greater zero that can be contained in `ifile` is $1/(N*dT)$,
- the greatest frequency is $1/(2dT)$ (Nyquist frequency),

with `N` the number of time steps and `dT` the time increment of `ifile` in years.

Operators

bandpass	Bandpass filtering Bandpass filtering (pass for frequencies between <code>fmin</code> and <code>fmax</code>). Suppresses all variability outside the frequency range specified by [<code>fmin,fmax</code>].
lowpass	Lowpass filtering Lowpass filtering (pass for frequencies lower than <code>fmax</code>). Suppresses all variability with frequencies greater than <code>fmax</code> .
highpass	Highpass filtering Highpass filtering (pass for frequencies greater than <code>fmin</code>). Suppresses all variability with frequencies lower than <code>fmin</code> .

Parameter

<code>fmin</code>	FLOAT	Minimum frequency per year that passes the filter.
<code>fmax</code>	FLOAT	Maximum frequency per year that passes the filter.

Example

Now assume your data are still hourly for a time period of 5 years but with a 365/366-day- calendar and you want to suppress the variability on timescales greater or equal to one year (we suggest here to use a number x bigger than one (e.g. $x=1.5$) since there will be dominant frequencies around the peak (if there is one) as well due to the issue that the time series is not of infinite length). Therefore you can use the following:

```
cdo highpass,x -del29feb ifile ofile
```

Accordingly you might use the following to suppress variability on timescales shorter than one year:

```
cdo lowpass,1 -del29feb ifile ofile
```

Finally you might be interested in 2-year variability. If you want to suppress the seasonal cycle as well as say the longer cycles in climate system you might use

```
cdo bandpass,x,y -del29feb ifile ofile
```

with $x \leq 0.5$ and $y \geq 0.5$.

2.15.3. GRIDCELL - Grid cell quantities

Synopsis

```
<operator> ifile ofile
```

Description

This module reads the grid cell area of the first grid from the input stream. If the grid cell area is missing it will be computed from the grid description. Depending on the chosen operator the grid cell area or weights are written to the output stream.

Operators

gridarea	Grid cell area Writes the grid cell area to the output stream. If the grid cell area have to be computed it is scaled with the earth radius to square meters.
gridweights	Grid cell weights Writes the grid cell area weights to the output stream.

Environment

PLANET_RADIUS	This variable is used to scale the computed grid cell areas to square meters. By default PLANET_RADIUS is set to an earth radius of 6371000 meter.
----------------------	--

2.15.4. SMOOTH9 - 9 point smoothing

Synopsis

```
smooth9 ifile ofile
```

Description

Performs a 9 point smoothing on all fields with a quadrilateral curvilinear grid. The result at each grid point is a weighted average of the grid point plus the 8 surrounding points. The center point receives a weight of 1.0, the points at each side and above and below receive a weight of 0.5, and corner points receive a weight of 0.3. All 9 points are multiplied by their weights and summed, then divided by the total weight to obtain the smoothed value. Any missing data points are not included in the sum; points beyond the grid boundary are considered to be missing. Thus the final result may be the result of an averaging with less than 9 points.

2.15.5. REPLACEVALUES - Replace variable values

Synopsis

```
setvals,oldval,newval[...] ifile ofile
```

```
setrtoc,rmin,rmax,c ifile ofile
```

```
setrtoc2,rmin,rmax,c,c2 ifile ofile
```

Description

This module replaces old variable values with new values, depending on the operator.

Operators

setvals Set list of old values to new values
Supply a list of n pairs of old and new values.

setrtoc Set range to constant

$$o(t,x) = \begin{cases} c & \text{if } i(t,x) \geq rmin \wedge i(t,x) \leq rmax \\ i(t,x) & \text{if } i(t,x) < rmin \vee i(t,x) > rmax \end{cases}$$

setrtoc2 Set range to constant others to constant2

$$o(t,x) = \begin{cases} c & \text{if } i(t,x) \geq rmin \wedge i(t,x) \leq rmax \\ c2 & \text{if } i(t,x) < rmin \vee i(t,x) > rmax \end{cases}$$

Parameter

<i>oldval,newval,...</i>	FLOAT	Pairs of old and new values
<i>rmin</i>	FLOAT	Lower bound
<i>rmax</i>	FLOAT	Upper bound
<i>c</i>	FLOAT	New value - inside range
<i>c2</i>	FLOAT	New value - outside range

2.15.6. TIMSORT - Timsort

Synopsis

```
timsort ifile ofile
```

Description

Sorts the elements in ascending order over all time steps for every field position. After sorting it is:

$$o(t_1, x) \leq o(t_2, x) \quad \forall (t_1 < t_2), x$$

Example

To sort all field elements of a dataset over all time steps use:

```
cdo timsort ifile ofile
```

2.15.7. VARGEN - Generate a field

Synopsis

```
const,const,grid ofile
random,grid[,seed] ofile
```

Description

Generates a dataset with one field. The size of the field is specified by the user given grid description. According to the chosen operator all field elements are constant or filled with random numbers.

Operators

const	Create a constant field Creates a constant field. All field elements of the grid have the same value.
random	Create a field with random numbers Creates a field with rectangularly distributed random numbers in the interval [0,1].

Parameter

<i>const</i>	FLOAT	Constant
<i>seed</i>	INTEGER	The seed for a new sequence of pseudo-random numbers [default: 1]
<i>grid</i>	STRING	Target grid description file or name

2.15.8. ROTUV - Rotation

Synopsis

```
rotuvb,u,v,... ifile ofile
```

Description

This is a special operator for datasets with wind components on a rotated grid, e.g. data from the regional model REMO. It performs a backward transformation of velocity components U and V from a rotated spherical system to a geographical system.

Parameter

<code>u,v,...</code>	STRING	Pairs of zonal and meridional velocity components (use variable names or code numbers)
----------------------	--------	--

Example

To transform the u and v velocity of a dataset from a rotated spherical system to a geographical system use:

```
cdo rotuvb,u,v ifile ofile
```

2.15.9. MASTRFU - Mass stream function

Synopsis

```
mastrfu ifile ofile
```

Description

This is a special operator for the post processing of the atmospheric general circulation model [ECHAM](#). It computes the mass stream function (code number 272). The input dataset have to be a zonal mean of v-velocity (code number 132) on pressure levels.

Example

To compute the mass stream function from a zonal mean v-velocity dataset use:

```
cdo mastrfu ifile ofile
```

2.15.10. HISTOGRAM - Histogram

Synopsis

```
<operator>,bounds ifile ofile
```

Description

This module creates bins for a histogram of the input data. The bins have to be adjacent and have non-overlapping intervals. The user has to define the bounds of the bins. The first value is the lower bound and the second value the upper bound of the first bin. The bounds of the second bin are defined by the second and third value, aso. Only 2-dimensional input fields are allowed. The output file contains one vertical level for each of the bins requested.

Operators

histcount	Histogram count Number of elements in the bin range.
histsum	Histogram sum Sum of elements in the bin range.
histmean	Histogram mean Mean of elements in the bin range.
histfreq	Histogram frequency Relative frequency of elements in the bin range.

Parameter

bounds FLOAT Comma separated list of the bin bounds (-inf and inf valid)

2.15.11. SETHALO - Set the left and right bounds of a field

Synopsis

```
sethalo,lhalo,rhalo ifile ofile
```

Description

This operator sets the left and right bounds of the rectangularly understood fields. Positive numbers of the parameter *lhalo* enlarges the left bound by the given number of columns from the right bound. The parameter *rhalo* does the similar for the right bound. Negative numbers of the parameter *lhalo/rhalo* can be used to remove the given number of columns of the left and right bounds.

Parameter

<i>lhalo</i>	INTEGER	Left halo
<i>rhalo</i>	INTEGER	Right halo

2.15.12. WCT - Windchill temperature

Synopsis

```
wct ifile1 ifile2 ofile
```

Description

Let `ifile1` and `ifile2` be time series of temperature and wind speed records, then a corresponding time series of resulting windchill temperatures is written to `ofile`. The wind chill temperature calculation is only valid for a temperature of $T \leq 33$ °C and a wind speed of $v \geq 1.39$ m/s. Whenever these conditions are not satisfied, a missing value is written to `ofile`. Note that temperature and wind speed records have to be given in units of °C and m/s, respectively.

2.15.13. FDNS - Frost days where no snow index per time period

Synopsis

```
fdns ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily minimum temperatures `TN` and `ifile2` be a corresponding series of daily surface snow amounts. Then counted is the number of days where $TN < 0$ °C and the surface snow amount is less than 1 cm. The temperature `TN` have to be given in units of Kelvin. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`.

2.15.14. STRWIN - Strong wind days index per time period

Synopsis

```
strwin[,v] ifile ofile
```

Description

Let `ifile` be a time series of daily maximum horizontal wind speeds `VX`, then counted is the number of days where $VX > v$. The horizontal wind speed v is an optional parameter with default $v = 10.5$ m/s. A further output variable is the maximum number of consecutive days with maximum wind speed greater than or equal to v . Note that both `VX` and v have to be given in units of m/s. Also note that the horizontal wind speed is defined as the square root of the sum of squares of the zonal and meridional wind speeds. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`.

Parameter

<code>v</code>	FLOAT	Horizontal wind speed threshold (m/s, default $v = 10.5$ m/s)
----------------	-------	---

2.15.15. STRBRE - Strong breeze days index per time period

Synopsis

```
strbre ifile ofile
```

Description

Let `ifile` be a time series of daily maximum horizontal wind speeds VX , then counted is the number of days where VX is greater than or equal to 10.5 m/s. A further output variable is the maximum number of consecutive days with maximum wind speed greater than or equal to 10.5 m/s. Note that VX is defined as the square root of the sum of squares of the zonal and meridional wind speeds and have to be given in units of m/s. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`.

2.15.16. STRGAL - Strong gale days index per time period

Synopsis

```
strgal ifile ofile
```

Description

Let `ifile` be a time series of daily maximum horizontal wind speeds VX , then counted is the number of days where VX is greater than or equal to 20.5 m/s. A further output variable is the maximum number of consecutive days with maximum wind speed greater than or equal to 20.5 m/s. Note that VX is defined as the square root of the sum of square of the zonal and meridional wind speeds and have to be given in units of m/s. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`.

2.15.17. HURR - Hurricane days index per time period

Synopsis

```
hurr ifile ofile
```

Description

Let `ifile` be a time series of daily maximum horizontal wind speeds VX , then counted is the number of days where VX is greater than or equal to 32.5 m/s. A further output variable is the maximum number of consecutive days with maximum wind speed greater than or equal to 32.5 m/s. Note that VX is defined as the square root of the sum of squares of the zonal and meridional wind speeds and have to be given in units of m/s. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`.

2.16. Climate indices

This section contains modules to compute the climate indices of daily temperature and precipitation extremes.

Here is a short overview of all operators in this section:

eca_cdd	Consecutive dry days index per time period
eca_cfd	Consecutive frost days index per time period
eca_csu	Consecutive summer days index per time period
eca_cwd	Consecutive wet days index per time period
eca_cwdi	Cold wave duration index wrt mean of reference period
eca_cwfi	Cold-spell days index wrt 10th percentile of reference period
eca_etr	Intra-period extreme temperature range
eca_fd	Frost days index per time period
eca_gsl	Growing season length index
eca_hd	Heating degree days per time period
eca_hwdi	Heat wave duration index wrt mean of reference period
eca_hwfi	Warm spell days index wrt 90th percentile of reference period
eca_id	Ice days index per time period
eca_pd	Precipitation days index per time period
eca_r10mm	Heavy precipitation days index per time period
eca_r20mm	Very heavy precipitation days index per time period
eca_r75p	Moderate wet days wrt 75th percentile of reference period
eca_r75ptot	Precipitation percent due to R75p days
eca_r90p	Wet days wrt 90th percentile of reference period
eca_r90ptot	Precipitation percent due to R90p days
eca_r95p	Very wet days wrt 95th percentile of reference period
eca_r95ptot	Precipitation percent due to R95p days
eca_r99p	Extremely wet days wrt 99th percentile of reference period
eca_r99ptot	Precipitation percent due to R99p days
eca_rr1	Wet days index per time period
eca_rx1day	Highest one day precipitation amount per time period
eca_rx5day	Highest five-day precipitation amount per time period

eca_sdi	Simple daily intensity index per time period
eca_su	Summer days index per time period
eca_tg10p	Cold days percent wrt 10th percentile of reference period
eca_tg90p	Warm days percent wrt 90th percentile of reference period
eca_tn10p	Cold nights percent wrt 10th percentile of reference period
eca_tn90p	Warm nights percent wrt 90th percentile of reference period
eca_tr	Tropical nights index per time period
eca_tx10p	Very cold days percent wrt 10th percentile of reference period
eca_tx90p	Very warm days percent wrt 90th percentile of reference period

2.16.1. ECACDD - Consecutive dry days index per time period

Synopsis

```
eca_cdd ifile ofile
```

Description

Let `ifile` be a time series of daily precipitation amounts `RR`, then counted is the largest number of consecutive days where `RR` is less than 1 mm. A further output variable is the number of dry periods of more than 5 days. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `consecutive_dry_days_index_per_time_period`
- `number_of_cdd_periods_with_more_than_5days_per_time_period`

Example

To get the largest number of consecutive dry days of a time series of daily precipitation amounts use:

```
cdo eca_cdd rrfile ofile
```

2.16.2. ECACFD - Consecutive frost days index per time period

Synopsis

```
eca_cfd ifile ofile
```

Description

Let `ifile` be a time series of daily minimum temperatures `TN`, then counted is the largest number of consecutive days where `TN` < 0 °C. Note that `TN` have to be given in units of Kelvin. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `consecutive_frost_days_index_per_time_period`

Example

To get the largest number of consecutive frost days of a time series of daily minimum temperatures use:

```
cdo eca_cfd tnfile ofile
```

2.16.3. ECACSU - Consecutive summer days index per time period

Synopsis

```
eca_csu[,T] ifile ofile
```

Description

Let `ifile` be a time series of daily maximum temperatures `TX`, then counted is the largest number of consecutive days where `TX > T`. The number `T` is an optional parameter with default `T = 25 °C`. Note that `TN` have to be given in units of Kelvin, whereas `T` have to be given in degrees Celsius. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `consecutive_summer_days_index_per_time_period`

Parameter

<code>T</code>	<code>FLOAT</code>	Temperature threshold (Celsius, default: <code>T = 25 Celsius</code>)
----------------	--------------------	---

Example

To get the largest number of consecutive summer days of a time series of daily minimum temperatures use:

```
cdo eca_csu txfile ofile
```

2.16.4. ECACWD - Consecutive wet days index per time period

Synopsis

```
eca_cwd ifile ofile
```

Description

Let `ifile` be a time series of daily precipitation amounts `RR`, then counted is the largest number of consecutive days where `RR` is at least 1 mm. A further output variable is the number of wet periods of more than 5 days. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `consecutive_wet_days_index_per_time_period`
- `number_of_cwd_periods_with_more_than_5days_per_time_period`

Example

To get the largest number of consecutive wet days of a time series of daily precipitation amounts use:

```
cdo eca_cwd rrfile ofile
```

2.16.5. ECACWDI - Cold wave duration index wrt mean of reference period

Synopsis

```
eca_cwdi[,nday[,T]] ifile1 ifile2 ofile
```

Description

Let *ifile1* be a time series of daily minimum temperatures *TN*, and let *ifile2* be the mean *TN*_{norm} of daily minimum temperatures for any period used as reference. Then counted is the number of days where, in intervals of at least *nday* consecutive days, $TN < TN_{norm} - T$. The numbers *nday* and *T* are optional parameters with default *nday* = 6 and *T* = 5 °C. A further output variable is the number of cold waves longer than or equal to *nday* days. Note that both *TN* and *TN*_{norm} have to be given in the same units. The date information of a time step in *ofile* is the date of the last contributing time step in *ifile1*. The following variables are created:

- cold_wave_duration_index_wrt_mean_of_reference_period
- cold_waves_per_time_period

Parameter

<i>nday</i>	INTEGER	Number of consecutive days (default: <i>nday</i> = 6)
<i>T</i>	FLOAT	Temperature offset (Celsius, default: <i>T</i> = 5 Celsius)

Example

To compute the cold wave duration index of a time series of daily minimum temperatures use:

```
cdo eca_cwdi tnfile tnnormfile ofile
```

2.16.6. ECACWFI - Cold-spell days index wrt 10th percentile of reference period

Synopsis

```
eca_cwfi[,nday] ifile1 ifile2 ofile
```

Description

Let *ifile1* be a time series of daily mean temperatures *TG*, and *ifile2* be the 10th percentile *TG*_{n10} of daily mean temperatures for any period used as reference. Then counted is the number of days where, in intervals of at least *nday* consecutive days, $TG < TG_{n10}$. The number *nday* is an optional parameter with default *nday* = 6. A further output variable is the number of cold-spell periods longer than or equal to *nday* days. Note that both *TG* and *TG*_{n10} have to be given in the same units. The date information of a time step in *ofile* is the date of the last contributing time step in *ifile1*. The following variables are created:

- cold_spell_days_index_wrt_10th_percentile_of_reference_period
- cold_spell_periods_per_time_period

Parameter

nday INTEGER Number of consecutive days (default: `nday = 6`)

Example

To compute the number of cold-spell days of a time series of daily mean temperatures use:

```
cdo eca_cwfi tgfile tgn10file ofile
```

2.16.7. ECAETR - Intra-period extreme temperature range

Synopsis

```
eca_etr ifile1 ifile2 ofile
```

Description

Let `ifile1` and `ifile2` be time series of maximum and minimum temperatures TX and TN, respectively. Then the extreme temperature range is the difference of the maximum of TX and the minimum of TN. Note that TX and TN have to be given in the same units. The date information of a time step in `ofile` is the date of the last contributing time steps in `ifile1` and `ifile2`. The following variables are created:

- `intra_period_extreme_temperature_range`

Example

To get the intra-period extreme temperature range for two time series of maximum and minimum temperatures use:

```
cdo eca_etr txfile tnfile ofile
```

2.16.8. ECAFD - Frost days index per time period

Synopsis

```
eca_fd ifile ofile
```

Description

Let `ifile` be a time series of daily minimum temperatures TN, then counted is the number of days where $TN < 0^{\circ}\text{C}$. Note that TN have to be given in units of Kelvin. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `frost_days_index_per_time_period`

Example

To get the number of frost days of a time series of daily minimum temperatures use:

```
cdo eca_fd tnfile ofile
```


2.16.9. ECAGSL - Thermal Growing season length index

Synopsis

```
eca_gsl[,nday[,T[,fland]]] ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily mean temperatures TG, and `ifile2` be a land-water mask. Within a period of 12 months, the thermal growing season length is officially defined as the number of days between:

- first occurrence of at least `nday` consecutive days with $TG > T$
- first occurrence of at least `nday` consecutive days with $TG < T$ within the last 6 months

On northern hemisphere, this period corresponds with the regular year, whereas on southern hemisphere, it starts at july 1st. Please note, that this definition may lead to weird results concerning values $TG = T$: In the first half of the period, these days do not contribute to the `gsl`, but they do within the second half. Moreover this definition could lead to discontinuous values in equatorial regions.

The numbers `nday` and `T` are optional parameter with default `nday = 6` and `T = 5 °C`. The number `fland` is an optional parameter with default value `fland = 0.5` and denotes the fraction of a grid point that have to be covered by land in order to be included in the calculation. A further output variable is the start day of year of the growing season. Note that `TG` have to be given in units of Kelvin, whereas `T` have to be given in degrees Celsius.

The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `thermal_growing_season_length`
- `day_of_year_of_growing_season_start`

Parameter

<code>nday</code>	INTEGER	Number of consecutive days (default: <code>nday = 6</code>)
<code>T</code>	FLOAT	Temperature threshold (degree Celsius, default: <code>T = 5 Celsius</code>)
<code>fland</code>	FLOAT	Land fraction threshold (default: <code>fland = 0.5</code>)

Example

To get the growing season length of a time series of daily mean temperatures use:

```
cdo eca_gsl tgfile maskfile ofile
```

2.16.10. ECAHD - Heating degree days per time period

Synopsis

```
eca_hd[,T1[,T2]] ifile ofile
```

Description

Let `ifile` be a time series of daily mean temperatures `TG`, then the heating degree days are defined as the sum of $T1 - TG$, where only values $TG < T2$ are considered. If `T1` and `T2` are omitted, a temperature of 17 °C is used for both parameters. If only `T1` is given, `T2` is set to `T1`. Note that `TG` have to be given in units of kelvin, whereas `T1` and `T2` have to be given in degrees Celsius. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- heating_degree_days_per_time_period

Parameter

<code>T1</code>	FLOAT	Temperature limit (Celsius, default: $T1 = 17$ Celsius)
<code>T2</code>	FLOAT	Temperature limit (Celsius, default: $T2 = T1$)

Example

To compute the heating degree days of a time series of daily mean temperatures use:

```
cdo eca_hd tgfile ofile
```

2.16.11. ECAHWDI - Heat wave duration index wrt mean of reference period

Synopsis

```
eca_hwdi[,nday[,T]] ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily maximum temperatures `TX`, and let `ifile2` be the mean `TXnorm` of daily maximum temperatures for any period used as reference. Then counted is the number of days where, in intervals of at least `nday` consecutive days, $TX > TXnorm + T$. The numbers `nday` and `T` are optional parameters with default `nday = 6` and $T = 5$ °C. A further output variable is the number of heat waves longer than or equal to `nday` days. Note that both `TX` and `TXnorm` have to be given in the same units. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- heat_wave_duration_index_wrt_mean_of_reference_period
- heat_waves_per_time_period

Parameter

<code>nday</code>	INTEGER	Number of consecutive days (default: <code>nday = 6</code>)
<code>T</code>	FLOAT	Temperature offset (Celsius, default: $T = 5$ Celsius)

2.16.12. ECAHWFI - Warm spell days index wrt 90th percentile of reference period

Synopsis

```
eca_hwfi[,nday] ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily mean temperatures `TG`, and `ifile2` be the 90th percentile `TGn90` of daily mean temperatures for any period used as reference. Then counted is the number of days where, in intervals of at least `nday` consecutive days, $TG > TGn90$. The number `nday` is an optional parameter with default `nday = 6`. A further output variable is the number of warm-spell periods longer than or equal to `nday` days. Note that both `TG` and `TGn90` have to be given in the same units. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `warm_spell_days_index_wrt_90th_percentile_of_reference_period`
- `warm_spell_periods_per_time_period`

Parameter

`nday` INTEGER Number of consecutive days (default: `nday = 6`)

Example

To compute the number of warm-spell days of a time series of daily mean temperatures use:

```
cdo eca_hwfi tgfile tgn90file ofile
```

2.16.13. ECAID - Ice days index per time period

Synopsis

```
eca_id ifile ofile
```

Description

Let `ifile` be a time series of daily maximum temperatures `TX`, then counted is the number of days where $TX < 0\text{ }^{\circ}\text{C}$. Note that `TX` have to be given in units of Kelvin. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `ice_days_index_per_time_period`

Example

To get the number of ice days of a time series of daily maximum temperatures use:

```
cdo eca_id txfile ofile
```

2.16.14. ECAPD - Precipitation days index per time period

Synopsis

```
eca_pd,x ifile ofile
eca_r10mm ifile ofile
eca_r20mm ifile ofile
```

Description

Let `ifile` be a time series of daily precipitation amounts `RR` in [mm] (or alternatively in [kg m⁻²]), then counted is the number of days where `RR` is at least x mm. `eca_r10mm` and `eca_r20mm` are specific ECA operators with a daily precipitation amount of 10 and 20 mm respectively. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `precipitation_days_index_per_time_period`

Operators

<code>eca_pd</code>	Precipitation days index per time period Generic ECA operator with daily precipitation sum exceeding x mm.
<code>eca_r10mm</code>	Heavy precipitation days index per time period Specific ECA operator with daily precipitation sum exceeding 10 mm.
<code>eca_r20mm</code>	Very heavy precipitation days index per time period Specific ECA operator with daily precipitation sum exceeding 20 mm.

Parameter

<code>x</code>	FLOAT	Daily precipitation amount threshold in [mm]
----------------	-------	--

Note

Please note, that precipitation rates in [mm/s] have to be converted to precipitation amounts (multiply with 86400 s).

Example

To get the number of days with precipitation greater than 25 mm for a time series of daily precipitation amounts use:

```
cdo eca_pd,25 ifile ofile
```

2.16.15. ECAR75P - Moderate wet days wrt 75th percentile of reference period

Synopsis

```
eca_r75p ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily precipitation amounts `RR`, and `ifile2` be the 75th percentile `RRn75` of daily precipitation amounts at wet days for any period used as reference. Then calculated is the percentage of wet days with $RR > RRn75$. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `moderate_wet_days_wrt_75th_percentile_of_reference_period`

Example

To compute the percentage of wet days where the daily precipitation amount is greater than the 75th percentile of the daily precipitation amount at wet days for a given reference period use:

```
cdo eca_r75p rrfile rrn75file ofile
```

2.16.16. ECAR75PTOT - Precipitation percent due to R75p days

Synopsis

```
eca_r75ptot ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily precipitation amounts `RR`, and `ifile2` be the 75th percentile `RRn75` of daily precipitation amounts at wet days for any period used as reference. Then calculated is the ratio of the precipitation sum at wet days with $RR > RRn75$ to the total precipitation sum. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `precipitation_percent_due_to_R75p_days`

2.16.17. ECAR90P - Wet days wrt 90th percentile of reference period

Synopsis

```
eca_r90p ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily precipitation amounts `RR`, and `ifile2` be the 90th percentile `RRn90` of daily precipitation amounts at wet days for any period used as reference. Then calculated is the percentage of wet days with $RR > RRn90$. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `wet_days_wrt_90th_percentile_of_reference_period`

Example

To compute the percentage of wet days where the daily precipitation amount is greater than the 90th percentile of the daily precipitation amount at wet days for a given reference period use:

```
cdo eca_r90p rrfile rrn90file ofile
```

2.16.18. ECAR90PTOT - Precipitation percent due to R90p days

Synopsis

```
eca_r90ptot ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily precipitation amounts `RR`, and `ifile2` be the 90th percentile `RRn90` of daily precipitation amounts at wet days for any period used as reference. Then calculated is the ratio of the precipitation sum at wet days with $RR > RRn90$ to the total precipitation sum. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `precipitation_percent_due_to_R90p_days`

2.16.19. ECAR95P - Very wet days wrt 95th percentile of reference period

Synopsis

```
eca_r95p ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily precipitation amounts `RR`, and `ifile2` be the 95th percentile `RRn95` of daily precipitation amounts at wet days for any period used as reference. Then calculated is the percentage of wet days with $RR > RRn95$. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `very_wet_days_wrt_95th_percentile_of_reference_period`

Example

To compute the percentage of wet days where the daily precipitation amount is greater than the 95th percentile of the daily precipitation amount at wet days for a given reference period use:

```
cdo eca_r95p rrfile rrn95file ofile
```

2.16.20. ECAR95PTOT - Precipitation percent due to R95p days

Synopsis

```
eca_r95ptot ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily precipitation amounts `RR`, and `ifile2` be the 95th percentile `RRn95` of daily precipitation amounts at wet days for any period used as reference. Then calculated is the ratio of the precipitation sum at wet days with $RR > RRn95$ to the total precipitation sum. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `precipitation_percent_due_to_R95p_days`

2.16.21. ECAR99P - Extremely wet days wrt 99th percentile of reference period

Synopsis

```
eca_r99p ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily precipitation amounts `RR`, and `ifile2` be the 99th percentile `RRn99` of daily precipitation amounts at wet days for any period used as reference. Then calculated is the percentage of wet days with $RR > RRn99$. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `extremely_wet_days_wrt_99th_percentile_of_reference_period`

Example

To compute the percentage of wet days where the daily precipitation amount is greater than the 99th percentile of the daily precipitation amount at wet days for a given reference period use:

```
cdo eca_r99p rrfile rrn99file ofile
```

2.16.22. ECAR99PTOT - Precipitation percent due to R99p days

Synopsis

```
eca_r99ptot ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily precipitation amounts `RR`, and `ifile2` be the 99th percentile `RRn99` of daily precipitation amounts at wet days for any period used as reference. Then calculated is the ratio of the precipitation sum at wet days with $RR > RRn99$ to the total precipitation sum. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `precipitation_percent_due_to_R99p_days`

2.16.23. ECARR1 - Wet days index per time period

Synopsis

```
eca_rr1 ifile ofile
```

Description

Let `ifile` be a time series of daily precipitation amounts `RR`, then counted is the number of days where `RR` is at least 1 mm. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `wet_days_index_per_time_period`

Example

To get the number of wet days of a time series of daily precipitation amounts use:

```
cdo eca_rr1 rrfile ofile
```

2.16.24. ECARX1DAY - Highest one day precipitation amount per time period

Synopsis

```
eca_rx1day[,mode] ifile ofile
```

Description

Let `ifile` be a time series of daily precipitation amounts `RR`, then the maximum of `RR` is written to `ofile`. If the optional parameter `mode` is set to 'm', then maximum daily precipitation amounts are determined for each month. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `highest_one_day_precipitation_amount_per_time_period`

Parameter

`mode` **STRING** Operation mode (optional). If `mode` = 'm' then maximum daily precipitation amounts are determined for each month

Example

To get the maximum of a time series of daily precipitation amounts use:

```
cdo eca_rx1day rrfile ofile
```

If you are interested in the maximum daily precipitation for each month, use:

```
cdo eca_rx1day,m rrfile ofile
```

Apart from metadata information, both operations yield the same as:

```
cdo timmax rrfile ofile
cdo monmax rrfile ofile
```

2.16.25. ECARX5DAY - Highest five-day precipitation amount per time period

Synopsis

```
eca_rx5day[,x] ifile ofile
```

Description

Let `ifile` be a time series of 5-day precipitation totals `RR`, then the maximum of `RR` is written to `ofile`. A further output variable is the number of 5 day period with precipitation totals greater than `x` mm, where `x` is an optional parameter with default `x = 50` mm. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `highest_five_day_precipitation_amount_per_time_period`
- `number_of_5day_heavy_precipitation_periods_per_time_period`

Parameter

<code>x</code>	FLOAT	Precipitation threshold (mm, default: <code>x = 50</code> mm)
----------------	-------	---

Example

To get the maximum of a time series of 5-day precipitation totals use:

```
cdo eca_rx5day rrfile ofile
```

Apart from metadata information, the above operation yields the same as:

```
cdo timmax rrfile ofile
```

2.16.26. ECASDII - Simple daily intensity index per time period

Synopsis

```
eca_sdii ifile ofile
```

Description

Let `ifile` be a time series of daily precipitation amounts `RR`, then the mean precipitation amount at wet days ($RR > 1$ mm) is written to `ofile`. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `simple_daily_intensity_index_per_time_period`

Example

To get the daily intensity index of a time series of daily precipitation amounts use:

```
cdo eca_sdii rrfile ofile
```

2.16.27. ECASU - Summer days index per time period

Synopsis

```
eca_su[,T] ifile ofile
```

Description

Let `ifile` be a time series of daily maximum temperatures `TX`, then counted is the number of days where `TX > T`. The number `T` is an optional parameter with default `T = 25 °C`. Note that `TX` have to be given in units of Kelvin, whereas `T` have to be given in degrees Celsius. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `summer_days_index_per_time_period`

Parameter

<code>T</code>	<code>FLOAT</code>	Temperature threshold (degree Celsius, default: <code>T = 25 Celsius</code>)
----------------	--------------------	---

Example

To get the number of summer days of a time series of daily maximum temperatures use:

```
cdo eca_su txfile ofile
```

2.16.28. ECATG10P - Cold days percent wrt 10th percentile of reference period

Synopsis

```
eca_tg10p ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily mean temperatures TG, and `ifile2` be the 10th percentile TGn10 of daily mean temperatures for any period used as reference. Then calculated is the percentage of time where $TG < TGn10$. Note that both TG and TGn10 have to be given in the same units. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- cold_days.percent.wrt.10th.percentile.of.reference.period

Example

To compute the percentage of time where the daily mean temperature is less than the 10th percentile of the daily mean temperature for a given reference period use:

```
cdo eca_tg10p tgfile tgn10file ofile
```

2.16.29. ECATG90P - Warm days percent wrt 90th percentile of reference period

Synopsis

```
eca_tg90p ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily mean temperatures TG, and `ifile2` be the 90th percentile TGn90 of daily mean temperatures for any period used as reference. Then calculated is the percentage of time where $TG > TGn90$. Note that both TG and TGn90 have to be given in the same units. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- warm_days.percent.wrt.90th.percentile.of.reference.period

Example

To compute the percentage of time where the daily mean temperature is greater than the 90th percentile of the daily mean temperature for a given reference period use:

```
cdo eca_tg90p tgfile tgn90file ofile
```

2.16.30. ECATN10P - Cold nights percent wrt 10th percentile of reference period

Synopsis

```
eca_tn10p ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily minimum temperatures `TN`, and `ifile2` be the 10th percentile `TNn10` of daily minimum temperatures for any period used as reference. Then calculated is the percentage of time where $TN < TNn10$. Note that both `TN` and `TNn10` have to be given in the same units. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `cold_nights.percent.wrt.10th.percentile.of.reference.period`

Example

To compute the percentage of time where the daily minimum temperature is less than the 10th percentile of the daily minimum temperature for a given reference period use:

```
cdo eca_tn10p tnfile tnn10file ofile
```

2.16.31. ECATN90P - Warm nights percent wrt 90th percentile of reference period

Synopsis

```
eca_tn90p ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily minimum temperatures `TN`, and `ifile2` be the 90th percentile `TNn90` of daily minimum temperatures for any period used as reference. Then calculated is the percentage of time where $TN > TNn90$. Note that both `TN` and `TNn90` have to be given in the same units. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `warm_nights.percent.wrt.90th.percentile.of.reference.period`

Example

To compute the percentage of time where the daily minimum temperature is greater than the 90th percentile of the daily minimum temperature for a given reference period use:

```
cdo eca_tn90p tnfile tnn90file ofile
```

2.16.32. ECATR - Tropical nights index per time period

Synopsis

```
eca_tr[,T] ifile ofile
```

Description

Let `ifile` be a time series of daily minimum temperatures `TN`, then counted is the number of days where $TN > T$. The number `T` is an optional parameter with default $T = 20$ °C. Note that `TN` have to be given in units of Kelvin, whereas `T` have to be given in degrees Celsius. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile`. The following variables are created:

- `tropical_nights_index_per_time_period`

Parameter

`T` `FLOAT` Temperature threshold (Celsius, default: $T = 20$ Celsius)

Example

To get the number of tropical nights of a time series of daily minimum temperatures use:

```
cdo eca_tr tnfile ofile
```

2.16.33. ECATX10P - Very cold days percent wrt 10th percentile of reference period

Synopsis

```
eca_tx10p ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily maximum temperatures `TX`, and `ifile2` be the 10th percentile `TNx10` of daily maximum temperatures for any period used as reference. Then calculated is the percentage of time where $TX < TX_{n10}$. Note that both `TX` and `TNx10` have to be given in the same units. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `very_cold_days_percent_wrt_10th_percentile_of_reference_period`

Example

To compute the percentage of time where the daily maximum temperature is less than the 10th percentile of the daily maximum temperature for a given reference period use:

```
cdo eca_tx10p txfile txn10file ofile
```

2.16.34. ECATX90P - Very warm days percent wrt 90th percentile of reference period

Synopsis

```
eca_tx90p ifile1 ifile2 ofile
```

Description

Let `ifile1` be a time series of daily maximum temperatures TX, and `ifile2` be the 90th percentile TXn90 of daily maximum temperatures for any period used as reference. Then calculated is the percentage of time where $TX > TXn90$. Note that both TX and TXn90 have to be given in the same units. The date information of a time step in `ofile` is the date of the last contributing time step in `ifile1`. The following variables are created:

- `very_warm_days_percent_wrt_90th_percentile_of_reference_period`

Example

To compute the percentage of time where the daily maximum temperature is greater than the 90th percentile of the daily maximum temperature for a given reference period use:

```
cdo eca_tx90p txfile txn90file ofile
```

Bibliography

[CDI]

[Climate Data Interface](#), from the [Max Planck Institute for Meteorologie](#)

[CM-SAF]

[Satellite Application Facility on Climate Monitoring](#), from the [German Weather Service \(Deutscher Wetterdienst, DWD\)](#)

[ECHAM]

[The atmospheric general circulation model ECHAM5](#), from the [Max Planck Institute for Meteorologie](#)

[GrADS]

[Grid Analysis and Display System](#), from the [Center for Ocean-Land-Atmosphere Studies \(COLA\)](#)

[GRIB]

[GRIB version 1](#), from the [World Meteorological Organisation \(WMO\)](#)

[GRIBAPI]

[GRIB API decoding/encoding](#), from the [European Centre for Medium-Range Weather Forecasts \(ECMWF\)](#)

[HDF5]

[HDF version 5](#), from the [HDF Group](#)

[INTERA]

[INTERA Software Package](#), from the [Max Planck Institute for Meteorologie](#)

[MPIOM]

[Ocean and sea ice model](#), from the [Max Planck Institute for Meteorologie](#)

[netCDF]

[NetCDF Software Package](#), from the [UNIDATA Program Center of the University Corporation for Atmospheric Research](#)

[PINGO]

[The PINGO package](#), from the [Model & Data group](#) at the [Max Planck Institute for Meteorologie](#)

[REMO]

[Regional Model](#), from the [Max Planck Institute for Meteorologie](#)

[Peisendorfer]

Rudolph W. Peisendorfer: [Principal Component Analysis](#), Elsevier (1988)

[PROJ.4]

[Cartographic Projections Library](#), originally written by Gerald Evenden then of the USGS.

[SCRIP]

[SCRIP Software Package](#), from the [Los Alamos National Laboratory](#)

[gzip]

[Gzip compression software](#), developed at [University of New Mexico](#).

[vonStorch]

Hans von Storch, Walter Zwiers: [Statistical Analysis in Climate Research](#), Cambridge University Press (1999)

A. Grid description examples

A.1. Example of a curvilinear grid description

Here is an example for the **CDO** description of a curvilinear grid. `xvals/yvals` describes the position of the 6x5 quadrilateral grid cells. The first 4 values of `xbounds/ybounds` are the corners of the first grid cell.

<code>gridtype</code>	=	<code>curvilinear</code>														
<code>gridsize</code>	=	30														
<code>xsize</code>	=	6														
<code>ysize</code>	=	5														
<code>xvals</code>	=	-21	-11	0	11	21	30	-25	-13	0	13					
		25	36	-31	-16	0	16	31	43	-38	-21					
		0	21	38	52	-51	-30	0	30	51	64					
<code>xbounds</code>	=	-23	-14	-17	-28		-14	-5	-6	-17		-5	5	6	-6	
		5	14	17	6		14	23	28	17		23	32	38	28	
		-28	-17	-21	-34		-17	-6	-7	-21		-6	6	7	-7	
		6	17	21	7		17	28	34	21		28	38	44	34	
		-34	-21	-27	-41		-21	-7	-9	-27		-7	7	9	-9	
		7	21	27	9		21	34	41	27		34	44	52	41	
		-41	-27	-35	-51		-27	-9	-13	-35		-9	9	13	-13	
		9	27	35	13		27	41	51	35		41	52	63	51	
		-51	-35	-51	-67		-35	-13	-21	-51		-13	13	21	-21	
<code>yvals</code>	=	13	35	51	21		35	51	67	51		51	63	77	67	
		29	32	32	32	29	26	39	42	42	42					
		39	35	48	51	52	51	48	43	57	61					
		62	61	57	51	65	70	72	70	65	58					
<code>ybounds</code>	=	23	26	36	32		26	27	37	36		27	27	37	37	
		27	26	36	37		26	23	32	36		23	19	28	32	
		32	36	45	41		36	37	47	45		37	37	47	47	
		37	36	45	47		36	32	41	45		32	28	36	41	
		41	45	55	50		45	47	57	55		47	47	57	57	
		47	45	55	57		45	41	50	55		41	36	44	50	
		50	55	64	58		55	57	67	64		57	57	67	67	
		57	55	64	67		55	50	58	64		50	44	51	58	
		58	64	72	64		64	67	77	72		67	67	77	77	
		67	64	72	77		64	58	64	72		58	51	56	64	

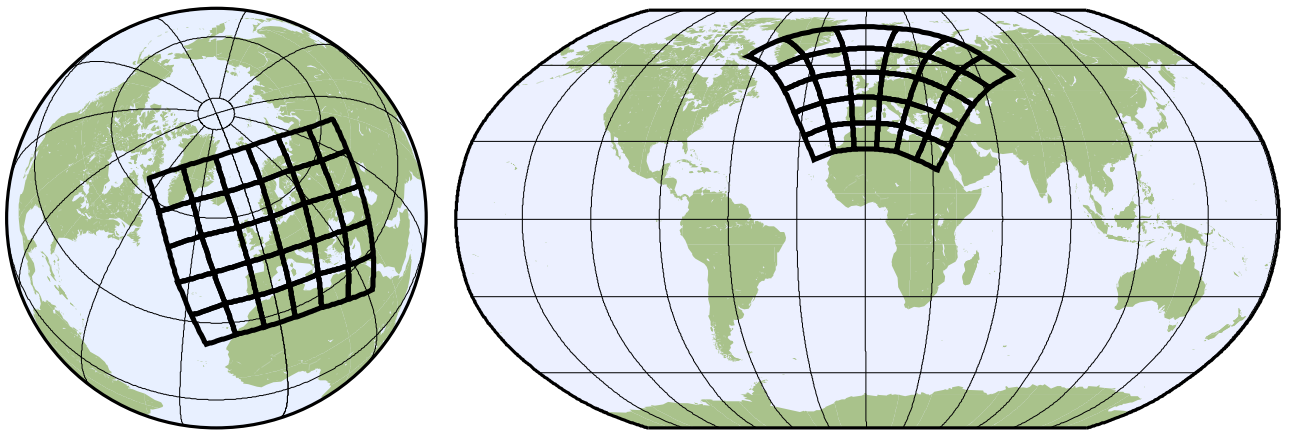


Figure A.1.: Orthographic and Robinson projection of the curvilinear grid

A.2. Example description for an unstructured grid

Here is an example of the **CDO** description for an unstructured grid. `xvals/yvals` describes the position of 30 independent hexagonal grid cells. The first 6 values of `xbounds/ybounds` are the corners of the first grid cell.

```

gridtype = unstructured
gridsize = 30
nvertex  = 6
xvals    = -36  36  0 -18  18 108 72 54 90 180
           144 126 162 -108 -144 -162 -126 -72 -90 -54
           0 72 36 144 108 -144 180 -72 -108 -36
xbounds   = 339  0  0 288 288 309 21 51 72 72 0 0
           0 16 21 0 339 344 340 0 -0 344 324 324
           20 36 36 16 0 0 93 123 144 144 72 72
           72 88 93 72 51 56 52 72 72 56 36 36
           92 108 108 88 72 72 165 195 216 216 144 144
           144 160 165 144 123 128 124 144 144 128 108 108
           164 180 180 160 144 144 237 267 288 288 216 216
           216 232 237 216 195 200 196 216 216 200 180 180
           236 252 252 232 216 216 288 304 309 288 267 272
           268 288 288 272 252 252 308 324 324 304 288 288
           345 324 324 36 36 15 36 36 108 108 87 57
           20 15 36 57 52 36 108 108 180 180 159 129
           92 87 108 129 124 108 180 180 252 252 231 201
           164 159 180 201 196 180 252 252 324 324 303 273
           236 231 252 273 268 252 308 303 324 345 340 324
yvals     = 58 58 32 0 0 58 32 0 0 58
           32 0 0 58 32 0 0 32 0 0
ybounds   = -58 -58 -32 -58 -32 -58 -32 -58 -32 -32
           41 53 71 71 53 41 41 41 53 71 71 53
           11 19 41 53 41 19 -19 -7 11 19 7 -11
           -19 -11 7 19 11 -7 41 41 53 71 71 53
           11 19 41 53 41 19 -19 -7 11 19 7 -11
           -19 -11 7 19 11 -7 41 41 53 71 71 53
           11 19 41 53 41 19 -19 -7 11 19 7 -11
           -19 -11 7 19 11 -7 11 19 41 53 41 19
           -19 -7 11 19 7 -11 -19 -11 7 19 11 -7
           -41 -53 -71 -71 -53 -41 -53 -71 -71 -53 -41 -41
           -19 -41 -53 -41 -19 -11 -53 -71 -71 -53 -41 -41
           -19 -41 -53 -41 -19 -11 -53 -71 -71 -53 -41 -41
           -19 -41 -53 -41 -19 -11 -53 -71 -71 -53 -41 -41
           -19 -41 -53 -41 -19 -11 -19 -41 -53 -41 -19 -11

```

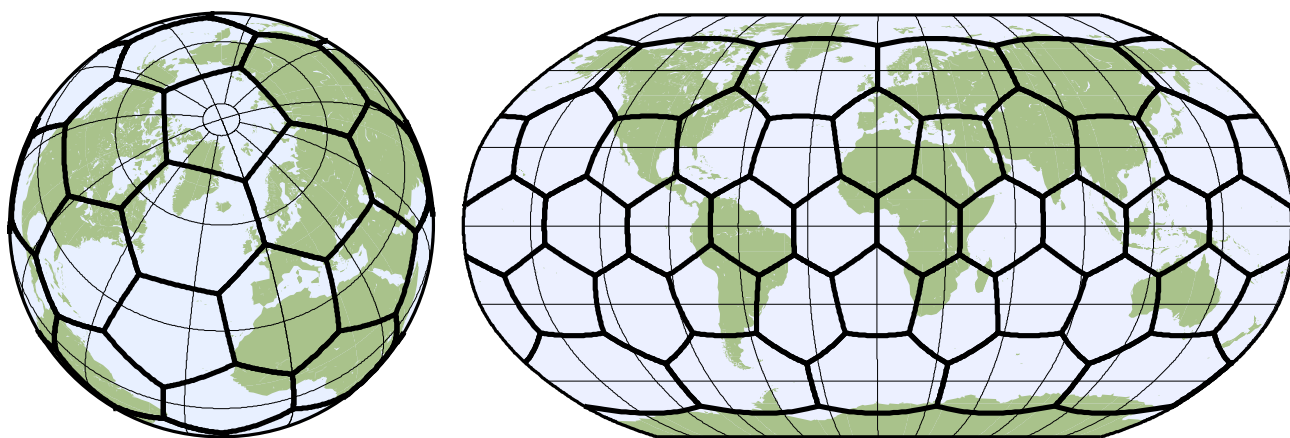


Figure A.2.: Orthographic and Robinson projection of the unstructured grid

Operator index

A

abs	61
acos	61
add	63
addc	62
asin	61
atan2	63

B

bandpass	146
----------------	-----

C

cat	25
chcode	48
chlevel	48
chlevelc	48
chlevelv	48
chname	48
chparam	48
consecsum	73
consects	73
const	149
copy	25
cos	61

D

dayavg	94
daymax	94
daymean	94
daymin	94
daypctl	95
daystd	94
daysum	94
dayvar	94
delcode	32
delname	32
delparam	32
detrend	115
diff	20
diffn	20
div	63
divc	62
divdpm	67
divdpy	67
dv2ps	136
dv2uv	136
dv2uvl	136

E

eca_cdd	156
---------------	-----

eca_cfd	156
eca_csu	157
eca_cwd	157
eca_cwdi	158
eca_cwfi	158
eca_etr	160
eca_fd	160
eca_gsl	161
eca_hd	162
eca_hwdi	162
eca_hwfi	163
eca_id	163
eca_pd	164
eca_r10mm	164
eca_r20mm	164
eca_r75p	165
eca_r75ptot	165
eca_r90p	166
eca_r90ptot	166
eca_r95p	167
eca_r95ptot	167
eca_r99p	168
eca_r99ptot	168
eca_rrl	169
eca_rx1day	169
eca_rx5day	170
eca_sdii	170
eca_su	171
eca_tg10p	172
eca_tg90p	172
eca_tn10p	173
eca_tn90p	173
eca_tr	174
eca_tx10p	174
eca_tx90p	175
enlarge	55
ensavg	74
ensbrs	76
enscrps	76
ensmax	74
ensmean	74
ensmin	74
enspctl	74
ensrkhistspace	76
ensrkhisttime	76
ensroc	76
ensstd	74
enssum	74
ensvar	74

eof	118
eof3d	118
eofcoeff	120
eofspatial	118
eoftime	118
eq	42
eqc	43
exp	61
expr	59
exprf	59

F

fdns	152
fldavg	78
fldcor	113
fldmax	78
fldmean	78
fldmin	78
fldpctl	78
fldstd	78
fldsum	78
fldvar	78

G

ge	42
gec	43
genbic	124
genbil	124
gencon	124
gencon2	124
gendis	124
genlaf	124
gennn	124
gp2sp	134
gp2spl	134
gradsdes1	145
gradsdes2	145
gridarea	147
gridboxavg	84
gridboxmax	84
gridboxmean	84
gridboxmin	84
gridboxstd	84
gridboxsum	84
gridboxvar	84
griddes	23
gridweights	147
gt	42
gtc	43

H

highpass	146
histcount	151
histfreq	151
histmean	151
histsum	151
houravg	92
hourmax	92

hourmean	92
hourmin	92
hourpctl	93
hourstd	92
hoursum	92
hourvar	92
hurr	153

I

ifnotthen	39
ifnotthenc	40
ifthen	39
ifthenc	40
ifthenelse	39
import_amsr	140
import_binary	138
import_cmsaf	139
info	18
infor	18
input	141
inputext	141
inputsrv	141
int	61
intlevel	130
intntime	131
inttime	131
intyear	132
invertlat	51
invertlev	51

L

le	42
lec	43
ln	61
log10	61
lowpass	146
lt	42
ltc	43

M

map	18
maskindexbox	53
masklonlatbox	53
maskregion	52
mastrfu	150
max	63
meravg	82
merge	27
mergetime	27
mermax	82
mermean	82
mermin	82
merpctl	82
merstd	82
mersum	82
mervar	82
min	63
ml2hl	129

ml2pl	129
monadd	64
monavg	96
monddiv	64
monmax	96
monmean	96
monmin	96
monmul	64
monpctl	97
monstd	96
monsub	64
monsum	96
monvar	96
mul	63
mulc	62
muldpm	67
muldpy	67

N

ndate	21
ne	42
nec	43
nint	61
nlevel	21
nmon	21
npar	21
ntime	21
nyear	21

O

output	142
outputext	142
outputf	142
outputint	142
outputsrv	142

P

pardes	23
pow	61

R

random	149
reci	61
regres	115
remap	126
remapbic	122
remapbil	122
remapcon	122
remapcon2	122
remapdis	122
remapeta	127
remaplaf	122
remapnn	122
replace	26
rotuvb	150
runavg	88
runmax	88
runmean	88

runmin	88
runpctl	89
runstd	88
runsum	88
runvar	88

S

seasavg	100
seasmax	100
seasmean	100
seasmin	100
seaspctl	101
seasstd	100
seassum	100
seasvar	100
selcode	32
seldate	35
selday	35
selgrid	32
selhour	35
selindexbox	37
sellevel	32
sellevidx	32
sellonlatbox	37
selltype	32
selmon	35
selname	32
selparam	32
selseas	35
selsmon	35
selstdname	32
seltabnum	32
seltime	35
selimestep	35
selyear	35
selzaxis	32
setcalendar	46
setcindexbox	54
setclonlatbox	54
setcode	45
setctomiss	56
setdate	46
setday	46
setgatt	50
setgatts	50
setgrid	49
setgridtype	49
sethalo	151
setlevel	45
setltype	45
setmisstoc	56
setmissval	56
setmon	46
setname	45
setparam	45
setpartab	45
setreftime	46
setrtoc	148

setrtoc2	148
setrtomiss	56
settaxis	46
settime	46
settunits	46
setvals	148
setvrange	56
setyear	46
setzaxis	49
shifttime	46
showcode	22
showdate	22
showformat	22
showlevel	22
showltype	22
showmon	22
showname	22
showstdname	22
showtime	22
showtimestamp	22
showyear	22
sin	61
sinfo	19
sinfo	19
smooth9	148
sp2gp	134
sp2gpl	134
sp2sp	134
splitcode	28
splitday	29
splitgrid	28
splithour	29
splitlevel	28
splitmon	29
splitname	28
splitparam	28
splitseas	29
splitsel	30
splittabnum	28
splityear	29
splitzaxis	28
sqr	61
sqrt	61
strbre	153
strgal	153
strwin	152
sub	63
subc	62
subtrend	116

T

tan	61
timavg	90
timcor	113
timmax	90
timmean	90
timmin	90
timpctl	91

timselavg	86
timselmax	86
timselmean	86
timselmin	86
timselfctl	87
timselfstd	86
timselfsum	86
timselfvar	86
timsort	149
timstd	90
timsum	90
timvar	90
trend	116

U

uv2dv	136
uv2dvl	136

V

vct	23
vertavg	85
vertmax	85
vertmean	85
vertmin	85
vertstd	85
vertsum	85
vertvar	85

W

wct	152
-----	-----

Y

ydayadd	66
ydayavg	103
ydaydiv	66
ydaymax	103
ydaymean	103
ydaymin	103
ydaymul	66
ydaypctl	104
ydaystd	103
ydaysub	66
ydaysum	103
ydayvar	103
ydrunavg	109
ydrunmax	109
ydrunmean	109
ydrunmin	109
ydrunpctl	111
ydrunstd	109
ydrunsum	109
ydrunvar	109
yearavg	98
yearmax	98
yearmean	98
yearmin	98
yearpctl	99
yearstd	98

yearsum	98
yearvar	98
yhouravg	102
yhourmax	102
yhourmean	102
yhourmin	102
yhourstd	102
yhoursum	102
yhourvar	102
ymonadd	65
ymonavg	105
ymondiv	65
ymonmax	105
ymonmean	105
ymonmin	105
ymonmul	65
ymonpctl	106
ymonstd	105
ymonsub	65
ymonsum	105
ymonvar	105
yseasavg	107
yseasmax	107
yseasmean	107
yseasmin	107
yseaspctl	108
yseasstd	107
yseassum	107
yseasvar	107

Z

zaxisdes	23
zonavg	80
zonmax	80
zonmean	80
zonmin	80
zonpctl	80
zonstd	80
zonsum	80
zonvar	80